

Email threading and TND setup basics

This guide contains workflows to provide you with basic information for setting up the following:

- Email threading only
- Textual near duplicate identification (TND) only
- Email threading and TND

For more detailed information, refer to the documentation site.

Email threading only setup

The setup for running email threading is comprised of five components:

1. Workspace fields
2. Saved search
3. Analytics profile
4. Structured analytics set
5. Views

1. Workspace fields setup

Your template should already have the fields listed below, so you may not need to create these fields. However, if you plan on using email threading with multiple structured analytics sets, you must create these relational fields for each structured analytics set (SAS).

Field name	Field type	Relational?
Email Duplicate ID	Fixed-length text	Yes
Email Thread Group	Fixed-length text	Yes

Click [here](#) to download the relational icons zip file.

2. Saved Search Setup

Use the following conditions and fields to create the saved search used for email threading. You do not need to set a sort order on this search.

Search Name

There is no recommendation for the saved search name. Follow your team's normal protocol for naming searches.

Conditions

- From is set

Note: You can use any condition here which means “document is an email”. Other common choices are based on the Relativity Native File Type or file extension.

- Parent Document ID is not set

Note: Generally, the Parent ID field is empty for parent emails. However, there may be situations where it is populated with its own control number. In that case, you may omit this condition.

- Include Families

Fields

Any fields are acceptable. As a quality control step, we recommend including the fields that will be mapped on the analytics profile as there may be fields that are named similarly that could lead to errors. We also recommend reviewing the Parent Document ID field. The field should be populated for children and empty for parent documents.


- Email From
- Email To
- Email CC
- Email BCC
- Email Subject
- Email Date Sent
- Parent Document ID
- File Name field

3. Analytics Profile Setup

The analytics profile is where you map the fields containing input information for email threading. Map the fields as follows:

Profile field name	Mapped document object field
Email from field:	Email From
Email to field:	Email To
Email cc field:	Email CC
Email bcc field:	Email BCC
Email subject field:	Email Subject
Email date sent field	Email Date/Time Sent

Profile field name	Mapped document object field
Parent document ID field:	Parent Document ID
Attachment name field:	File Name
Conversation ID field:	DO NOT MAP

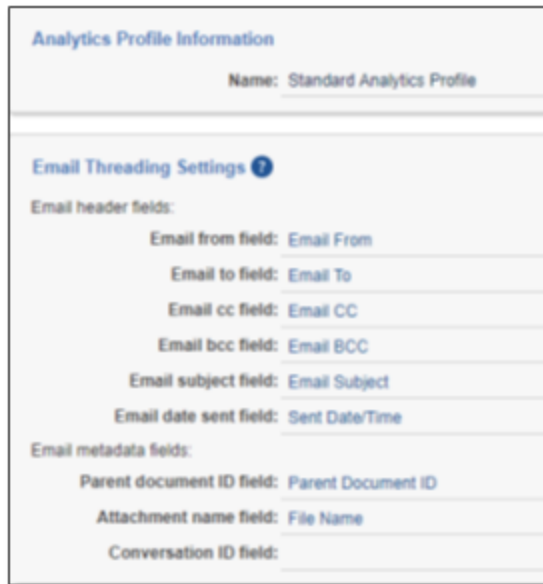

Notes:

- The email date sent field should contain a date/time. Not just a date. Email threading will produce degraded results if a date-only field is mapped.
- Set the Parent Document ID field to the control number of the parent for all child documents. The parent documents may have this field set to their own control number or set to blank.
- The Attachment name field should contain the file name for any attachment. It is ignored for non-attachments.

4. Creating a structured analytics set

Here are the steps and choices for creating a structured analytics set.

Structured Analytics Set Information

- **Name**—enter a name for the structured analytics set.
- **Prefix**—keep the default prefix or add your own prefix. Shorter prefixes (even just two characters, such as “E1”) take up less space in your views.
- **Operations to run**—select Email threading.
- **Data source**—select the saved search you created above.

Structured Analytics Set Information *
Optional Settings

Name*

Prefix*

Operations to run*

- Email threading
- Name normalization
- Textual near duplicate identification
- Language identification
- Repeated content identification

Data source*

Email Headers

- **Analytics profile**—select the profile you created above.
- **Use email header fields**—select Yes.
- **Languages**—select any language used in email headers in your extracted text. We recommend that you always include English, even for data sets in other languages.

Email Headers

Analytics profile* Add


Use email header fields

Languages*

<input checked="" type="checkbox"/> English	<input type="checkbox"/> French	<input type="checkbox"/> Korean
<input type="checkbox"/> Chinese	<input type="checkbox"/> German	<input type="checkbox"/> Portuguese
<input type="checkbox"/> Dutch	<input type="checkbox"/> Japanese	<input type="checkbox"/> Spanish

Email threading

- **Destination Email Thread Group**—select the default field or the custom field you created.
- **Destination Email Duplicate ID**—select the default field or the custom field you created.

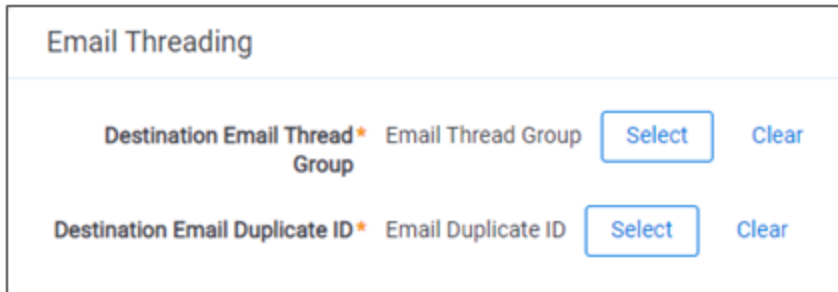

Optional settings

- **Analytics server** - select the appropriate Analytics server.

5. Email Threading views

Once you run the structured analytics set, create the following views to view the results of your email threading operations. There are two document list views and one relational items view.

Email Threading View

This view returns emails that have been threaded along with any duplicate spares and family members.

Fields

- Edit
- Control Number
- [SAS Prefix]::Email Threading Display
- [SAS Prefix]::Email Thread Group
- [SAS Prefix]::Email Threading ID
- [SAS Prefix]::Inclusive Email
- [SAS Prefix]::Inclusive Reason
- [SAS Prefix]::Email Duplicate Spare*
- [SAS Prefix]::Email Duplicate ID*
- [SAS Prefix]::Indentation*

*Fields marked with an asterisk are not required for an email threading view, but they will be helpful for viewing duplicate spares.

Conditions

- [SAS Prefix]::Email Thread Group is Set

Sort

- [SAS Prefix]::Email Thread Group – Ascending Order
- [SAS Prefix]::Indentation – Ascending Order (some prefer Descending)
- [SAS Prefix]::Email Threading ID – Ascending Order

Group Definition

- Email thread group

	Control Number	SA501:Email Threading Display	SA501:Email Thread Group	SA501:Inclusive Email	SA501:Inclusive Reason	SA501:Email Duplicate Spare	SA501:Indentation
	Filter	Filter	Filter	(All)	(All)	(All)	= Filter
1	Kaminski_000002046	Shirley Crenshaw Greg Whalley (In Weekly Meet)	A0000001	Yes	MESSAGE	No	1
2	Kaminski_000002046	Shirley Crenshaw Greg Whalley (In Weekly Meet)	A0000002	Yes	MESSAGE	No	1

Inclusive Non-Duplicate Spare Emails with Family Members Fields

- Edit
- Control Number
- [SAS Prefix]::Email Threading Display
- [SAS Prefix]::Email Thread Group
- [SAS Prefix]::Inclusive Reason
- [SAS Prefix]::Email Duplicate ID
- [SAS Prefix]::Indentation

Conditions

Create the following saved search, and then associate the search with the view using the Saved Search condition.

- Name
 - [SAS Prefix] Inclusive Non-Dup
- Search conditions
 - [SAS Prefix]::Email Thread Group is Set AND
 - [SAS Prefix]::Inclusive Email is Yes AND
 - [SAS Prefix]::Email Duplicate Spare is No AND
 - Related Items = + Family

- Fields
 - Control Number

Sort

- [SAS Prefix]::Email Thread Group – Ascending Order
- [SAS Prefix]::Indentation – Ascending Order (some prefer Descending)
- [SAS Prefix]::Email Threading ID – Ascending Order

Group definition

- Email thread group

	Control Number	SAS Prefix: Email Threading Display	SAS Prefix: Email Thread Group	SAS Prefix: Inclusive Email	SAS Prefix: Inclusive Reason	SAS Prefix: Email Duplicate Space	SAS Prefix: Email Duplicate ID	SAS Prefix: Indentation
1	EMR [icon] Kanenaki_0000011805	[icon] Vince J Kanenaki	ADDRESS00	Yes	MESSAGE	Yes	email-1	1
2	EMR [icon] Kanenaki_0000010636	[icon] Vince J Kanenaki	ADDRESS01	Yes	MESSAGE	Yes	email-2	1

Relational items view

The Relational Items View is located within the viewer and is used to navigate to documents within a specific thread. The view is associated with the Email Thread Group relational field.

Fields

- Control Number
- [SAS Prefix]::Email Threading Display


Conditions

- No conditions can be set on a relational view

Sort

- [SAS Prefix]::Email Thread Group – Ascending Order
- [SAS Prefix]::Indentation – Ascending Order (some prefer Descending)

- [SAS Prefix]::Email Threading ID – Ascending Order

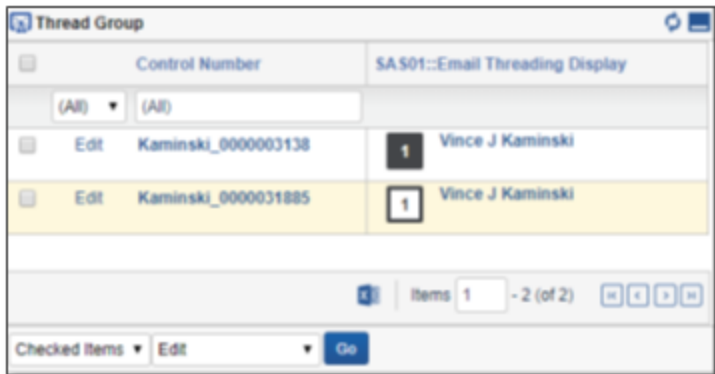

Textual near duplicate identification (TND) only setup

The setup for running textual near duplicate identification is comprised of four components:

1. Workspace fields
2. Saved search
3. Structured analytics set
4. Views

1. Workspace fields setup

Your template should already have the fields listed below, so you may not need to create these fields. However, if you plan on using TND within multiple structured analytics sets, you must create these relational fields for each structured analytics set.

Field name	Field type	Relational?
Textual Near Duplicate Group	Fixed-length text	Yes

Click [here](#) to download the relational icons zip file.

2. Saved Search Setup

Use the following conditions and fields to create the saved search used for TND. You don't need to set a sort order on this search.

Search Name

There is no recommendation for the saved search name. Your team's normal protocol for naming searches will work here.

Conditions

We recommend not setting an extracted text size on the search. As a result, all documents without text are grouped together, which can help you identify documents that don't have text but should.

- Record type is not email.

Note: You can use whatever condition is necessary to identify documents that are only attachments or loose files.

Fields


Any fields are acceptable.

3. Creating a structured analytics set

Here are the steps and choices for creating a structured analytics set.

Structured analytics set information

- Name**—enter a name for the structured analytics set.
- Prefix**—keep the default prefix or add your own prefix. Shorter prefixes (even just two characters, such as “E1”) take up less space in your views.
- Operations to run**—select **Textual near duplicate identification**.
- Data source**—select the saved search you created above.

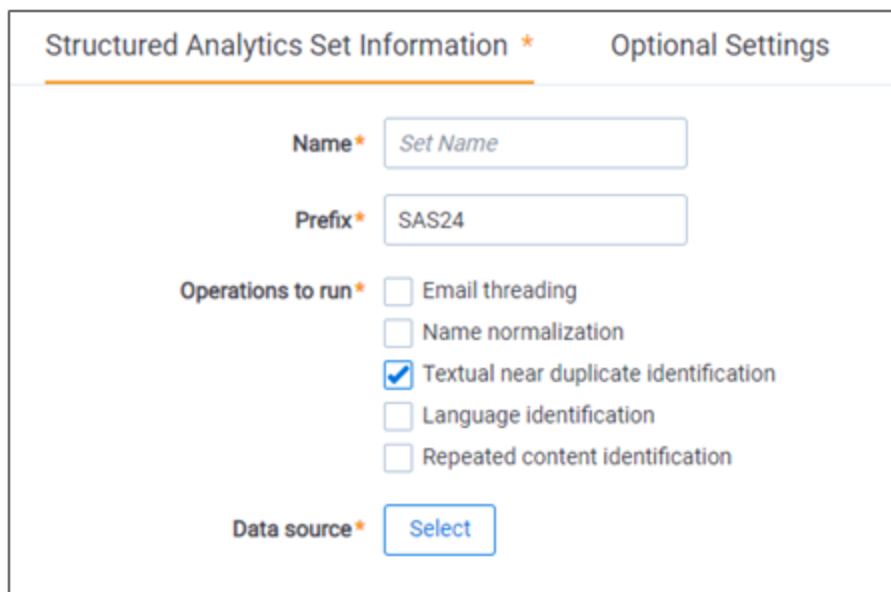


The screenshot shows a configuration form for a structured analytics set. It is divided into two tabs: "Structured Analytics Set Information" (which is selected) and "Optional Settings". Under the "Structured Analytics Set Information" tab, there are four main sections:

- Name ***: A text input field containing the placeholder text "Set Name".
- Prefix ***: A text input field containing the text "SAS24".
- Operations to run ***: A list of five checkboxes:
 - Email threading
 - Name normalization
 - Textual near duplicate identification
 - Language identification
 - Repeated content identification
- Data source ***: A button labeled "Select".

Textual Near Duplicate Identification fields

- **Destination Textual Near Duplicate Group**—Textual Near Duplicate Group.
- **Minimum similarity percentage**—you can keep the default value or change it to a value between 80 and 100.
- **Ignore numbers**—select No unless you have a very large document set that will take a long time to run.

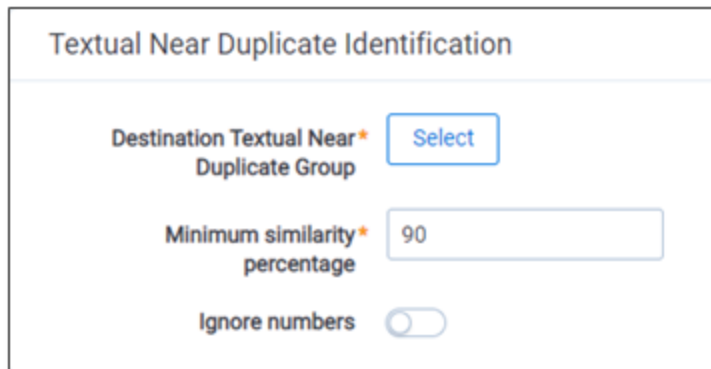

Textual Near Duplicate Identification

Destination Textual Near Duplicate Group*

Minimum similarity percentage*

Ignore numbers

Optional Settings

- Choose the appropriate Analytics server.

4. TND views

A document list view and a relational view can be set up after the structured analytics set has been run.

Document List View

Fields

- Edit
- Control Number
- [SAS Prefix]::Textual Near Duplicate Group
- [SAS Prefix]::Textual Near Duplicate Similarity
- [SAS Prefix]::Textual Near Duplicate Principal
- Relativity Compare

Conditions

- SAS Prefix]::Textual Near Duplicate Group is Set

Sort

- [SAS Prefix]::Textual Near Duplicate Group – Ascending Order
- [SAS Prefix]::Textual Near Duplicate Similarity – Descending Order

- [SAS Prefix]::Textual Near Duplicate Principal – Descending Order

Group Definition

- Textual Near Duplicate Group

#	Control Number	SAS05::Textual Near Duplicate Group	SAS05::Textual Near Duplicate Principal	SAS05::Textual Near Duplicate Simil...
1	B_RAPP0000000021.0001	B_RAPP0000000021.0001	Yes	100
2	B_RAPP00000000374.0001	B_RAPP0000000021.0001	No	100
3	B_RAPP00000000031.0001	B_RAPP00000000031.0001	Yes	100
4	B_RAPP00000000119.0001	B_RAPP00000000031.0001	No	100

Relation Items View

The Relational Items View is located within the viewer and is used to navigate to documents within a specific thread. The view is associated to the [SAS Prefix]::Textual Near Duplicate Group field.

Fields

- Control Number
- [SAS Prefix]::Textual Near Duplicate Group
- [SAS Prefix]::Textual Near Duplicate Similarity
- [SAS Prefix]::Textual Near Duplicate Principal
- Relativity Compare

Conditions

- Conditions cannot be set on a relational items view.

Sort

- [SAS Prefix]::Textual Near Duplicate Group – Ascending Order
- [SAS Prefix]::Textual Near Duplicate Similarity – Descending Order
- [SAS Prefix]::Textual Near Duplicate Principal – Descending Order

Control Number	Textual Near Duplicate Principal	Textual Near Duplicate Similarity	Compare
B_RAPP0000000031.0001	Yes	100	[Compare Icon]
B_RAPP00000000119.0001	No	100	[Compare Icon]
B_RAPP00000000386.0001	No	100	[Compare Icon]

Email Threading & TND Setup

The setup for running email threading and TND together is comprised of five components:

1. Workspace fields
2. Saved search
3. Analytics profile
4. Structured analytics set
5. Views

1. Workspace Fields Setup

The template should already have the fields listed below so there may not be a need to create these fields. However, if you plan on using multiple structured analytics sets, you will need to create these fields for each structured analytics set.

Field name	Field type	Relational?
Email Duplicate ID	Fixed-length text	Yes
Email Thread Group	Fixed-length text	Yes
Textual Near Duplicate Group	Fixed-length text	Yes

Click [here](#) to download the relational icons zip file.

2. Saved Search Setup

Here are the conditions and fields for the saved search that will be used for email threading and TND. It is not necessary to set a sort order on this search.

Search Name

There is no recommendation for the saved search name. Your team's normal protocol for naming searches will work here.

Conditions

No conditions are set for this search as you want to include all attachments and all loose files.

Fields

Any fields are acceptable. As a QC step, we recommend including the fields that will be mapped on the analytics profile as there may be fields that are named similarly that could lead to errors.

- Email From
- Email To
- Email CC

- Email BCC
- Email Subject
- Email Date Sent
- Parent Document ID
- File Name field

3. Analytics Profile Setup

The analytics profile is where you map the fields containing input information for email threading. Map the fields as follows:

Profile field name	Mapped document object field
Email from field:	Email From
Email to field:	Email To
Email cc field:	Email CC
Email bcc field:	Email BCC
Email subject field:	Email Subject
Email date sent field	Email Date/Time Sent
Parent document ID field:	Parent Document ID
Attachment name field:	File Name
Conversation ID field:	DO NOT MAP

4. Structured Analytics Set

Here are the steps and choices for creating your structured analytics set.

Structured Analytics Set Information

- **Name**—enter a name for the structured analytics set.
- **Prefix**—keep the default prefix or add your own prefix. Shorter prefixes (even just two characters, such as “E1”) take up less space in your views.
- **Operations to run**—select Email threading and Textual near duplicate identification.
- **Data source**—select the saved search you created above.

Email Headers

- **Analytics profile**—select the profile you created above.
- **Use email header fields**—select Yes.

- **Languages**—select any language used in email headers in your extracted text. We recommend that you always include English, even for data sets in other languages.

Email Threading

- **Destination Email Thread Group**—select the default field or the custom field you created.
- **Destination Email Duplicate ID**—select the default field or the custom field you created.

Textual Near Duplication fields

- **Destination Textual Near Duplicate Group**—Textual Near Duplicate Group
- **Minimum similarity percentage**—you can keep the default value or change it to a value between 80 and 100.
- **Ignore numbers**—select No unless you have a very large document set that will take a long time to run.

Optional Settings

- Choose the appropriate Analytics server

5. Views

Refer to the Email threading only and Textual near duplicate identification only sections for creating views.

Proprietary Rights

This documentation (“**Documentation**”) and the software to which it relates (“**Software**”) belongs to Relativity ODA LLC and/or Relativity’s third party software vendors. Relativity grants written license agreements which contain restrictions. All parties accessing the Documentation or Software must: respect proprietary rights of Relativity and third parties; comply with your organization’s license agreement, including but not limited to license restrictions on use, copying, modifications, reverse engineering, and derivative products; and refrain from any misuse or misappropriation of this Documentation or Software in whole or in part. The Software and Documentation is protected by the **Copyright Act of 1976**, as amended, and the Software code is protected by the **Illinois Trade Secrets Act**. Violations can involve substantial civil liabilities, exemplary damages, and criminal penalties, including fines and possible imprisonment.

©2024. Relativity ODA LLC. All rights reserved. Relativity® is a registered trademark of Relativity ODA LLC.