

Collect - Slack

October 5, 2026

Table of Contents

1 Collect	5
1.1 Data sources	5
1.2 Commercial and Government support	5
2 Installing Collect	6
2.1 System requirements for Collect	6
2.2 Installing Collect	6
2.2.1 Installing Collect from the application library	6
2.3 Permissions to run Collect	7
2.4 Uninstalling the application	9
3 Matters	9
3.1 Creating a matter	9
3.2 Matter Details layout fields	9
3.3 Viewing or editing matter details	10
4 Custodian targets	10
4.1 Custodians	11
4.2 Fields	11
4.3 Creating a custodian target	12
4.3.1 Generating targets in the wizard	12
4.4 Removing custodian targets	13
5 Data sources	13
5.1 Creating a collect data source	13
5.1.1 Third-party vendor	14
5.2 Data source types	14
6 Cellebrite data source	14
6.1 Considerations	14
6.2 Prerequisites	15
6.3 Collection size	15
6.4 Task checklist	16
6.4.1 Support resources	16
6.5 Create the OAuth2 Client	16
6.6 Set permissions in Relativity aiR	17
6.7 Connect Cellebrite to Relativity aiR	17

6.8 Generate API key for Cellebrite data source	17
6.9 Create the data source in Relativity aiR	18
6.9.1 Settings fields	18
6.10 Create entities in Relativity aiR	18
6.11 Create a Collect job in Relativity aiR	19
6.12 Mobile data collection results	19
6.13 Troubleshooting	19
7 ChatGPT Enterprise data source	20
7.1 Considerations	21
7.2 Prerequisites	21
7.3 Collection size	21
7.4 Collected metadata	22
7.5 Creating the data source	22
7.6 Settings fields	23
7.7 Configuring the data source	23
8 Claude	24
8.1 Considerations	24
8.2 Prerequisites	25
8.3 Collected data	25
8.3.1 Collected metadata	25
8.3.2 Retention expectations and data availability	26
8.4 Creating the data source	26
8.5 Settings fields	26
8.6 Configuring the data source	27
9 Slack data source	27
9.1 Considerations	27
9.1.1 Grouped collection	28
9.1.2 Attachments and linked cloud files	28
9.1.3 Collection size	28
9.2 Task checklist	28
9.3 Slack application setup	29
9.4 Creating the data source in Collect	29
9.5 Settings fields	31
9.6 Configuring the data source in Collect	31

9.6.1 Criteria	32
9.6.2 Configuration considerations	33
10 Slack best practices	34
10.1 Date range	34
10.2 Channel scope	34
10.3 Recommended approach for large collections	34
10.4 Intended use	35
11 Collection	35
11.1 Considerations	35
11.2 Best practices for time-sensitive collections	35
11.3 Creating a collection	36
11.4 Using the Collect wizard	36
11.4.1 Collection Details	36
11.4.2 Data source	37
11.4.3 Custodians	38
11.4.4 Non-custodial	38
11.4.5 Collection Summary	38
12 Viewing or editing Collection data	39
12.1 Collection details	39
12.2 Viewing collected data	41
12.3 Collect console	41
12.3.1 Collection	41
12.4 Delete collections	42
13 Grouped collections	43
13.1 Grouped data sources	43
13.2 Grouping messages	43
13.3 Custodian assignment considerations	44
13.4 Manual processing guidance	44
14 Migrate Collect workspaces	44
14.1 Migrate Collect workspaces	44
14.2 Credentials do not migrate	44
14.3 After migration	44
14.3.1 Considerations	45
15 Identifying Collection data in Staging Explorer	45

16 Reports	47
16.1 Running reports	47
16.1.1 Collection Summary report	47
16.1.2 Collection Details report	47
16.1.3 Results report	47
16.1.4 Errors report	48
17 Status Summary	48
17.1 Job status	48
17.2 Reviewing job statuses	48
18 Target Status	49
19 Monitor	49
20 Index	51

1 Collect

Use this application for collecting your custodian's data through different sources. Start by setting up Collect as an application within your data source. For information on registering an app, see the source's documentation on their website. Once registered, start adding custodians, data sources, and targets to Collect. Once connected, start the collect job and begin collecting data from custodians.

Note: This document covers the Slack source.

1.1 Data sources

In Collect, you can collect data from a variety of data sources. For more information, see [Data sources on page 13](#).

- **Cellebrite**—collect data from Cellebrite. For more information, see [Cellebrite data source on page 14](#).
- **ChatGPT Enterprise**—collect data from ChatGPT Enterprise. For more information, see [ChatGPT Enterprise data source on page 20](#).
- **Claude**—select to collect from Anthropic's Claude. For more information on specific fields and settings, see [Claude on page 24](#).
- **Slack**—collect short messages from within an organization's or custodian's Slack Enterprise application.
 - You can also collect chats from Slack Enterprise Grid directly into Relativity aiR Government.
 - For more information on short messages, see the Relativity User site.
 - This data source requires application setup before you can add it as a data source in Collect.
 - For more information, see [Slack data source on page 27](#).

1.2 Commercial and Government support

There are no other limitations compared to Relativity aiR commercial instances aside from data source connector availability.

Use the following table to see available connectors in Relativity aiR Government instances compared to commercial instances.

Note: Inactive mailbox, and Inactive OneDrive for Government is currently only supported for customers in Microsoft GCC tenants.

2 Installing Collect

You can install Collect in a workspace by using the functionality available through the Application Deployment System (ADS). This system provides you with the option to install Collect by selecting it from the list of existing applications in the Application Library tab or by importing it from an external application file.

To install Collect, install Collect from the Application Library tab and, if required, enable access for the data source.

Confirm that you have the appropriate system admin permissions to install an application. For more information, see [Workspace security](#) on the Relativity aiR documentation site.

2.1 System requirements for Collect

Collect uses the ADS framework, so you install it as an application within a Relativity instance. Consequently, Collect has the same system requirements as Relativity aiR. For Relativity aiR's system requirements, see [System Requirements](#) on the Relativity aiR Documentation site.

2.2 Installing Collect

Collect is compatible with Relativity aiR. See [Getting started in Relativity aiR](#) on the Documentation site for requirements.

For a Collect-only installation, you do not need the following pre-requisites:

- Analytics server setup
- Database server for processing or native imaging
- Worker server for processing or native imaging
- Obtaining applications for native imaging and processing

Because Collect uses the ADS framework, you can install through the Relativity Application tab from the library. See [Installing Collect from the application library below](#).

Note: You configure security permissions on Collect just as you would for any other Relativity application. For more information, see [Workspace security](#) on the Relativity aiR documentation site.

2.2.1 Installing Collect from the application library

If Collect is in the application library, you can install it to the current workspace. Confirm that you have the appropriate system admin permissions to install an application. For more information, see [Workspace security](#) on the Relativity aiR Documentation site.

Note: Analytics, Case Dynamics, Collect, Legal Hold, and Processing all share the Entity object. You may be prompted to complete additional steps to unlock and resolve conflicts of the listed applications in order to complete installation. For information, see [Troubleshooting application installation errors](#) on the Relativity aiR documentation site.

Use the following procedure to install Collect from the application library:

1. Navigate to the workspace where you want to install the application.
2. Navigate to the **Application Admin** tab.
3. Click **New Relativity Application** to display an application form.
4. Click the **Select from Application Library** radio button in the Application Type section.
5. Click the ellipses  button in the **Choose from Application Library** field.
6. Select **Collect** on the Select Library Application dialog. This dialog only displays applications added to the Application Library. If **Collect** is not included in the list, see the [Installing applications](#) topic.
7. Click **Ok** to display the application in the **Choose from Application Library** field. The application form also displays the following fields:
 - **Version**—displays the version of the application that you are installing.
 - **User-friendly URL**—displays a user-friendly version of the application's URL. This field may be blank.
 - **Application Artifacts**—displays object types and other application components.
 - **Map Fields**—there are no fields available in **Collect** for mapping.
8. Click **Import** to install **Collect** into the workspace.
9. Review the import status of the application. Verify that the install was successful or resolve errors.

2.3 Permissions to run Collect

The following security permissions are required to run and complete the collection process:

Note: Feature Permissions provide an alternative to Relativity's security management by shifting the focus from Object Types and Tab Visibility to feature-based permissions. This method is an alternative option. Any feature-specific permissions information already in this and other topics is still applicable. The Feature Permissions interface enables administrators to manage permissions at the feature level, offering a more intuitive experience. By viewing granular permissions associated with each feature, administrators can ensure comprehensive control, ultimately reducing complexity and minimizing errors. For details see [Instance-level permissions](#) and [Workspace-level permissions](#).

Object Security	Tab Visibility	Other Settings
Collect Objects: • Collection — View, Edit, Add • Collection Detail Custodian — View, Edit, Add, Delete • Collection Detail Custodian Target — View, Edit, Add, Delete • Collection Detail Custodian Target Result — View, Edit, Add, Delete • Collection Detail Noncustodial Source — View, Edit, Add, Delete	• Collections • Monitor • Custodian Targets • Status Summary • Custodial Target Status • Non-Custodial Target Status • Entities (only needed if user must see Entities) • Any processing tabs (only needed if user will access Processing)	• None

Object Security	Tab Visibility	Other Settings
• Collection Detail Noncustodial Target — View, Edit, Add, Delete • Collection Detail Request — View, Edit, Add, Delete • Collection Detail Source Instance — View, Edit, Add, Delete • Collection Detail Source Type — View, Edit, Add, Delete • Collection Detail Summary — View, Edit, Add, Delete • Collection Matter — View, Edit, Add • Collection Run — View, Edit, Add • Collection Source Instance — View • Collection Source Instance Parameter — View • Collection Source Target Parameter Instance — View • Collection Source Target Parameter Type — View • Collection Source Type — View • Collection Source Type Criteria — View • Collection Source Type Criteria Validator — View • Collection Source Type OAuth Definition — View • Custodian Target — View, Edit, Add, Delete • Custodian Target Generation Error — View, Edit, Add, Delete • Entity — only View, unless user needs to manage Entities in which case include Edit, Add • Noncustodial Data Source Instance — View, Edit, Add, Delete • Noncustodial Target Generation Error — View, Edit, Add, Delete Objects required for integrated Processing functionality: • Folder — View, Edit, Add		

Object Security	Tab Visibility	Other Settings
• Processing Data Source — View, Edit, Add • Processing Error — View, Edit, Add • Processing Profile — View, Edit, Add • Processing Set — View, Edit, Add • Relativity Time Zone — View, Edit, Add		

2.4 Uninstalling the application

If you need to remove the Collect application from your workspace, contact [Relativity Support](#).

3 Matters

In Collect, a matter represents a legal action or case requiring you to collect electronic data from sources such as Slack. Matters can be used to group multiple related collection jobs.

You manage matters that are associated with a collection. You can create each of these items on their respective tabs, or you can create them when you add a new collection.

Note: Matters created from Home aren't available for use in Collect nor listed on the Matters tab in this application. Additionally, the matters created on this tab are only available for use in Collect.

3.1 Creating a matter

Use the following procedure to create a matter that you can associate with a collection:

1. Navigate to the Matters tab. Collect displays a list of the active matters currently available to this application.
2. Click **New Collection Matter**.
3. Complete the fields in the Matter Details layout. See [Matter Details layout fields below](#).
4. Click **Save**. Collect displays the matter details. See [Viewing or editing matter details on the next page](#).

You can also create a matter when you add a new collection. Click the **Add** link next to the Matter field in the Collection layout. See [Creating a collection on page 36](#).

3.2 Matter Details layout fields


The Matter Details layout contains the following fields:

- **Name**—the name of the matter.
- **Number**—the number you assign to the matter for reporting purposes.
- **Status**—the status you assign to the matter for reporting purposes. Select an existing status from the drop-down menu or click **Add** to define a new one. Existing statuses include **Active** and **Closed**.

Note: Assigning a status of Closed to a matter hides it from the Active Collect view on the Collect tab.

- **Primary Contact**—the name of an individual who handles communications related to the matter.

- **Description**—the description of the matter used for reporting purposes. Click **Edit** to display an HTML text editor where you can enter the description.

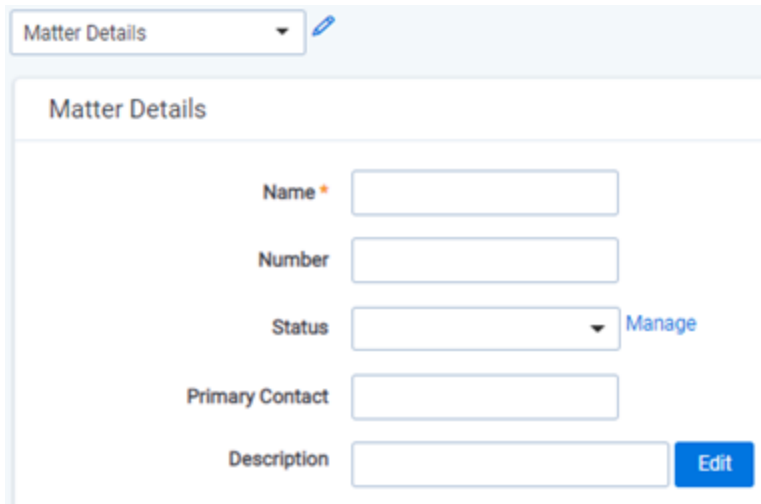

The screenshot shows a web form titled "Matter Details". At the top, there is a dropdown menu labeled "Matter Details" with a blue pencil icon to its right. Below this, the form contains several input fields: "Name" with a red asterisk indicating it is required, "Number", "Status" with a dropdown arrow and a "Manage" link to its right, "Primary Contact", and "Description" with a blue "Edit" button to its right.

3.3 Viewing or editing matter details

Display the matter details by clicking the name of a matter on the Matters tab. Collect also displays these details immediately after you add a new matter. You can use the buttons at the top of the page to edit, delete, or perform other tasks with the matter.

The details page includes the following sections:

- **Matters Details**—lists the name, number, status, primary contact and description of the matter.
- **Collect**—lists all collections associated with the matter. You can also perform the following tasks in this section:
 - **Associate the matter with a new collection**—to create a new collection, click **New**. See [Creating a collection on page 36](#).
 - **Remove a collection from Relativity**—click **Delete** to display a pop-up window. To view child objects and associated objects, click **Dependencies**.
 - **Modify collection details**—click the **Edit** link for a collection. To modify the matter, click the **Edit** button at the top of the page.
 - **Display the collection details**—click the name of the collection.

4 Custodian targets

In Collect, you manage custodians that have an associated data source. The custodian target is the combination of a custodian and data source. It is an endpoint from which Collect can connect to and collect from.

To collect from custodians, entities either have to already exist, be created, or be imported in Relativity. The custodian and their primary email address must also be associated to the data source. When the primary email address field for a custodian is present, Collect automatically generates the required targets for each data source while setting up a collection job.

Note: Custodian targets are automatically generated based on the primary email address in the Entity record for the Slack data source. Custodian targets can still be generated manually. The auto-generation of targets is based on the custodian's email address. For more information, see [Creating a custodian target on page 12](#).

4.1 Custodians

Once you create an entity in the Collect Custodian view and add it to a collect project, it becomes a custodian.

If a custodian does not exist, you can manually create an entity from the Entities tab. If a custodian does exist, you can create a custodian target. For more information, see [Creating a custodian target](#).

You can add custodians to Collect at different times throughout the collection process. There are different ways to populate the entity list including using Integration Points, Import/Export, or manually. For more information, see Integration Points and Import/Export. To manually create a new custodian, follow the steps below:

1. Navigate to the **Entities** tab.
2. Click **New Entity** on the Custodians tab.
3. Select the **Collection History** layout from the drop-down menu and complete the fields. See [Fields below](#).
4. Click **Save**.

Note: When creating a custodian from Legal Hold, the **Custodians - Legal Hold View** is selected by default. If Collection or Processing is also installed in the same workspace, you can view the **Custodians - Processing View** or **Custodians - Collection View**.

Collect Custodian

Type * ☒ Person
☐ Other
[Manage](#)

First Name *

Last Name *

Email

4.2 Fields

When creating an entity, the Collection Custodian layout provides the following fields and others. To successfully create a collect entity, at a minimum, complete the following fields:

- **Custodian Type** (Required)—select one of the following:
 - **Person**—select this option to enter first and last name of the individual acting as custodian of the data you wish to process.
 - **Other**—select this option if the custodian of the data to process is not an individual but is, for example, just a company name.
 - Selecting this option changes the Custodian layout to remove the required First Name and Last Name fields and instead presents a required Full Name field.
 - You can also select this option to enter an individual's full name without having that name include a comma once you export the data associated with it.
- **First Name** (Required)—the first name of the custodian. This field is only available if you've set the Custodian Type to Person.

- **Last Name** (Required)—the last name of the custodian.
 - This field is only available if you've set the Custodian Type to Person.
- **Full Name**—the full name of the custodian of the data you wish to process.
 - Required when you set the Custodian Type to Other, Organization, or a custom choice type.
 - When you enter the full name, it does not contain a comma when you export the data associated with it.
- **Email** (Required)—the email the custodian uses in the target.
 - The entity's email is required to connect the entity to a custodian target. The email is not required to save the entity.
 - This email address must match the email address within the connected data source.

4.3 Creating a custodian target

You can collect electronic data from custodians who are individuals, or entities, involved in a legal action or case. You may perform multiple collections from a single custodian.

On the Custodians tab, you can create and edit custodians as well as view their details, associate them with collections, and perform other tasks. Custodian Targets can also be automatically generated in the Collection Summary step of the Collect wizard. For more information, see [Collection Summary on page 38](#).

Use the following procedure to create a custodian target that you can associate with a collection:

1. Enter the **Name** of the custodian target.
2. Click **Select** to select available custodians. If the custodian does not exist, click **Add** and complete additional steps.
3. Click the **Data Source** drop-down menu to select a data source. For more information Collection data sources, see [Data source types on page 14](#).
4. Enter the custodian's email address in the **Target** field.

Custodian Target Information

The form titled "Custodian Target Information" contains the following fields:

- Name ***: A text input field.
- Entity ***: A field with a blue "Select" button and a blue "Add" link.
- Data Source ***: A dropdown menu.
- Target ***: A text input field.

To avoid duplicate custodians, a custodian with multiple emails, you will need to link a second custodian target to the same entity. To make a second custodian target for the same entity, you will need to create another target.

In the target, select the same entity. Then, select the other data source and enter the target value. This way you can have multiple targets, different from the primary email address, for a single entity record.

4.3.1 Generating targets in the wizard

Custodian Targets can also be automatically generated in the Collection Summary step of the Collect wizard. For more information, see [Collection Summary on page 38](#).

Click **Generate Targets** to check if targets exist for the custodians you've selected for collection. If the targets do not exist, Collect creates them based on the email address in the Entity details in each custodian.

If an invalid custodian target is created manually, the auto-generation of custodian targets does not remove the invalid custodian target. Remove it manually. Any errored targets display in the Collection Summary step or on the Status Summary tab.

To delete a custodian target from the Custodians Targets tab, click the data source's checkbox and use the Delete mass operation.

4.4 Removing custodian targets

To remove any custodian target, first remove the custodian from the collection or collections. You can use the Mass delete operation to delete collect custodians, also known as entities. For more information, see the Admin Guide.

Trying to delete a custodian target before removing a custodian results in an error.

5 Data sources

A data source allows you to define where and how you pull data from a communication channel. A data source stores the configuration necessary to retrieve data from a communication channel, process that data, and ingest it into Collect.

Set up workspace data sources before beginning collections. Data sources are stores of information from which you collect data. These data sources have parameters that you can set during the creation of a collection job.

Note: Data sources cannot be deleted once it's been run on a collection.

5.1 Creating a collect data source

The Collection Admin tab is where you create, edit, and remove data sources from your workspace. Setup only needs to be done once for each data source. You must create your data sources prior to setting up your custodian targets. For more information, see [Custodian targets on page 10](#).

When creating data sources, you can select different types of data sources for obtaining files.

Use the following procedure to create a new Collect source instance:

1. Navigate to **Collection Admin**.
2. Click the **New Collection Source Instance** button.
3. Do the following:
 - **Name**—enter in a unique name for the data source.
 - **Type**—select the type of data source. For more information, see [Data source types on the next page](#).

Note: Collect automatically collects any data that is preserved due to an in-place hold or litigation hold. Data on a hold is stored in a preservation library and separate folders. For more information, see [Microsoft Retention Policies](#).

- **Settings**—enter the data source-specific settings. For more information on specific fields and settings, locate your data source topic from [Data source types on the next page](#).

4. Click **Save**.

After clicking Save, Relativity verifies the parameters and connectivity to the data source instance. If successful, the data source is saved. If the connection fails, a message displays indicating that the connection failed. If verification fails, verify that the values are correct. The data source will save when it is corrected and is verified.

Once the data source is set up, you'll see the data source information on the Collection Admin page.

5.1.1 Third-party vendor

If you are a vendor setting up a data source on behalf of a client, the client does not need access to the Relativity workspace. You manage the workspace setup on their behalf. The client only needs to provide admin credentials for their platform to complete the data source setup. The client has two options:

- The platform admin shares their credentials with you directly.
- The client creates a dedicated admin account for you to use.

We recommend completing this step in a screenshare session with the client's admin to avoid sharing credentials outside of the client's organization.

5.2 Data source types

You can select any of the following data source types for step 3 of [Creating a collect data source on the previous page](#):

- **Cellebrite**—collect data from Cellebrite. For more information, see [Cellebrite data source below](#).
- **ChatGPT**—select to collect data from ChatGPT. For more information on specific fields and settings, see [ChatGPT Enterprise data source on page 20](#).
- **Claude**—select to collect from Anthropic's Claude. For more information on specific fields and settings, see [Claude on page 24](#).
- **Slack**—select to collect data from an organization or custodian's Slack profile.
 - Slack is collected as grouped collections. At the data source level, the custodian appears as the data source name.
 - For more information on specific fields, settings, temporary code, and access token, see [Slack data source on page 27](#).

6 Cellebrite data source

This topic provides details on how you can remotely capture mobile device messages and attachments from Android or iOS devices using the Cellebrite data source within Collect.

Note: This documentation contains references to third-party software, or technologies. While efforts are made to keep third-party references updated, the images, documentation, or guidance in this topic may not accurately represent the current behavior or user interfaces of the third-party software. For more considerations regarding third-party software, such as copyright and ownership, see [Terms of Use](#).

Note: The steps below apply whether you are using Cellebrite Endpoint Inspector or Endpoint Mobile Now. Going forward in this topic, we will simply refer to them as Cellebrite.

6.1 Considerations

Review the list of considerations before starting your collection:

- This functionality is available to Relativity aiR US and UK-based commercial clients. It is not yet available to US Government clients or those outside the US and UK.
- Cellebrite data source requires separate licensing, configuration, and training through Cellebrite.
 - For more information, log in to your account at [MyCellebrite.com](#) to download the installation files and manuals based on which product you are using:

Note: To ensure a successful data collection, be sure that you and the custodian familiarize yourselves with Cellebrite's documentation, recommendations, and tips for mobile collections before you begin collecting. Also be sure to review the What's New in Version <#.#> chapter of the Cellebrite Endpoint Inspector or Endpoint Mobile Now user guides.

- Cellebrite Endpoint Inspector User Guide
- Cellebrite Endpoint Inspector SaaS Communication and Security Guide
- Cellebrite Endpoint Mobile Now User Guide
- The output generated from mobile device collections consists of all short message-type data in Relativity Short Message Format (RSMF) files.
 - The corresponding Cellebrite Universal Forensic Electronic Device (UFD) file is also uploaded to your StagingArea.
 - An example of a UFD file is a forensic image.
- UFD files cannot be processed. However, they are made available if you need the UFD downloaded for examination outside of Relativity aiR.
- Collect captures all short message data that Cellebrite successfully extracts from a device and, converted to RSMF.
 - This includes original UFD image and collection reports.
 - Support for specific apps depends on whether Cellebrite can extract and decode that app's data for the device, operating system, and app version.

6.2 Prerequisites

Basic configuration for your instance of Cellebrite and Relativity aiR must be completed as follows:

- In Cellebrite:
 - Set up your instance.
 - If using Endpoint Inspector, create the required user account with the Examiner role.
 - Ensure the required ports are open.
 - For use with Relativity aiR, you do not need to set up a storage repository.
- In Relativity aiR: The Collect application must be installed into the Relativity workspace that is used to perform Cellebrite collections. For more information on installing Collect in a workspace, see [Installing Collect](#).

6.3 Collection size

Cellebrite data volume depends on the size and scope of the original device extraction.

Category	Details
Hard limits (enforced)	Extraction-defined
Planning thresholds (guidance)	Full device extractions can be large
When to split	Very large extractions
Notes	Mobile data post-extraction

Use extraction scope to guide splitting decisions rather than custodian count.

6.4 Task checklist

The table below outlines the tasks in the order they need to be performed and within which application to perform them.

Order	Application Used	Task Type	Task
1	Relativity aiR	Configuration	Create the OAuth2 Client below
2	Relativity aiR	Configuration	Set permissions in Relativity aiR on the next page
3	Cellebrite	Configuration	Connect Cellebrite to Relativity aiR on the next page
4	Cellebrite	Configuration	Generate API key for Cellebrite data source on the next page
5	Relativity aiR	Configuration	Create the data source in Relativity aiR on page 18
6	Relativity aiR	Configuration	Create entities in Relativity aiR on page 18
8	Relativity aiR	Collecting	Create a Collect job in Relativity aiR on page 19

6.4.1 Support resources

If you have questions or issues while going through these procedures, please contact the following resources depending on the application:

- **Cellebrite (Endpoint Inspector or Endpoint Mobile Now)**—contact [Cellebrite Customer Support](#) or log in to your [MyCellebrite](#) account to view Cellebrite's documentation.
- **Relativity aiR Collect**—contact [Relativity Customer Support](#) or refer to [Relativity Documentation](#) or [Community Site](#) for more information.

6.5 Create the OAuth2 Client

To facilitate data transfers and communication of collection status updates from Cellebrite to Relativity aiR, an OAuth2 client must be configured in Relativity aiR. Use the following steps to create a new OAuth2 Client. For more detailed instructions, see documentation on creating and editing an OAuth2 client.

In Relativity aiR:

1. Navigate to the **OAuth2 Client** tab within Authentication.
2. Click the **New OAuth2 Client** button.
3. Do the following:
 - **Name**—enter a unique name for the OAuth2 client.
 - **Enabled**—ensure the **Enabled** toggle is on.
 - **Flow Grant Type**—select **Client Credentials** from the list.
 - **Context User**—select a user account from the list. The Context User will also generate the [Cellebrite API key](#) that is used to configure the Collect data source.
 - **Access Token Lifetime** (in minutes)—enter **60**.

4. Click **Save**.
5. Make note of the **Client ID** and **Client Secret** values that were generated. These values are needed when connecting [Cellebrite to Relativity aiR](#).

6.6 Set permissions in Relativity aiR

Ensure the following account permissions are properly set up. For additional information, see [Adding user to groups](#) and [Setting workspace permissions](#).

- **For Context Users**—The Context User selected in the previous section must be added to a group in Relativity aiR that is assigned to the workspace in which Cellebrite collections are run. The group within the workspace must have **Allow Export** and **Allow Import** permissions selected (enabled) under Admin Operations on the Other Settings tab. See [Manage Workspace Permissions](#) for more information.
- **For Relativity Service Account**—assign the Relativity Service Account (**Service Account, Relativity**) user to a group (other than the System Admin group) that has been assigned to the workspace in which Cellebrite collections are run.

6.7 Connect Cellebrite to Relativity aiR

Next, you must connect Cellebrite to Relativity aiR using the Client ID and Client Secret obtained in [Create the OAuth2 Client on the previous page](#).

In Cellebrite:

1. Navigate to **Settings**.
2. Scroll to the **Relativity aiR** section and do the following:
 - **Client ID** and **Client Secret**—enter the ID and secret generated previously when creating the OAuth2 client in Relativity aiR.
 - **Domain**—enter the Relativity aiR domain. For example, esus019064-t066.r1.kcura.com. This is not the full URL address, so you do not include "https://" or the ending slash.
3. Click **Save**.

6.8 Generate API key for Cellebrite data source

After connecting Cellebrite to Relativity aiR, you must generate and save the API key. This API key is entered in Relativity aiR when [creating a new data source](#) outlined in the next section.

Note: The user generating the API key must be the Context User set up in [Create the OAuth2 Client on the previous page](#).

In Cellebrite:

4. Navigate to **User Settings** if using Endpoint Inspector or to **Settings** if using Endpoint Mobile Now.
5. Click **Generate Key**.
6. Copy the **API Key** and save it securely.

Caution: You will not be able to see this API key again in Endpoint Inspector or Endpoint Mobile Now so be sure to copy and save it.

This API key is required when you [create a new data source](#) next in Relativity aiR. You must also provide the following information:

- The exact username that was used to generate the API key if you used Endpoint Inspector.
- The exact email address that was used to generate the API key if you used Endpoint Mobile Now.
- The URL for your instance of Endpoint Inspector or Endpoint Mobile Now. For example: <https://example.ei-cellebrite.cloud/>

6.9 Create the data source in Relativity aiR

Next, create a new Collect data source instance in your Relativity aiR workspace.

Note: You must have previously installed the Collect application into your workspace. For more information on installing Collect, see [Installing Collect](#).

In Relativity aiR:

7. Navigate to **Collection Admin** within Collect Admin in Set Up.
8. Click **New Collection Source Instance**.
9. Do the following:
 - **Name**—enter a unique name for the data source.
 - **Type**—select the **Cellebrite** data source.
 - **Settings**—enter the required information in the Settings fields. For more information, see [Settings fields below](#).
10. Click **Save**. The data source displays on the Collection Admin page.

6.9.1 Settings fields

To connect Relativity to the Cellebrite data source, you need to gather and enter the information for the following fields. This information was generated in the [Generate API key for Cellebrite data source on the previous page](#) section.

- **API Key**—the API key previously generated in Cellebrite.
- **API Username**—the Cellebrite user account used to generate the associated API Key.
 - If Endpoint Inspector was used to create the API key, then enter the user's username (for example, jane-smith).
 - If Endpoint Mobile Now was used to create the API key, then enter the user's email address (for example, jane.smith@relativity.com).
- **API URL**—the Cellebrite server URL for the associated API Key.

6.10 Create entities in Relativity aiR

Within your Relativity aiR workspace, populate the Entities list with those individuals from which you wish to collect data. For more information on populating Relativity with entities, see Entity object documentation.

Note: Ensure that the Email address field for the Entity (such as, custodian) contains the primary email address to which you want Cellebrite collection requests emailed. The Secondary Email address information for the entity is not used.

6.11 Create a Collect job in Relativity aiR

You can begin creating and running collections in Relativity aiR. For more information, see [Collections](#).

Be aware of the following when performing Cellebrite collections:

- You cannot combine other data source types with the Cellebrite data source.
- You can collect from multiple custodians in the same job when using the Cellebrite data source.

All dates are in Coordinated Universal Time (UTC).

6.12 Mobile data collection results

The export package created by Cellebrite for ingestion by Relativity aiR includes these files:

- Original collection file in UFED zip format
- Messages and attachments in an RSMF collection
- UFED reader file (UFD)
- Device Report
- Collection Report
- Results.csv file

The nature of data collections from Android and iOS devices differs due to the inherent differences between platforms. These are the most noteworthy differences:

- iOS message collections target messages from native apps and the most popular third-party apps that iTunes can back up. Attached media and document files are included.
- Android message collections target SMS, MMS, and RCS text messages from native apps. Attached media and document files are included.

6.13 Troubleshooting

This table includes troubleshooting for Cellebrite data source.

Area	Issue	Resolution
Data Source setup	User is unable to save a Cellebrite data source configuration in Collect or validation fails on an existing source.	• Verify the user has entered the correct value for the API key. • Verify the API Username is the Cellebrite account used to generate the API key in Cellebrite. • For Endpoint Inspector, this is the user account name. • For Endpoint Mobile Now, this is the email address of the user. • Verify the Context User who configured the OAuth2 client in Relativity aiR is also the same user who generated the API key in Cellebrite. • If the problem still exists after verifying the information in the previous bullets, then generate a new API key in Cellebrite.
Job start	The Collect job fails	• Verify in Cellebrite Settings that the OAuth2 client setup for Relativity

Area	Issue	Resolution
	when the user clicks the Start button.	aiR has the correct values for the Client ID and Secret. They must match the values in Relativity aiR for the OAuth2 client configured. • Verify in Cellebrite Settings that the Domain for the OAuth client setup for Relativity aiR points to the correct Relativity aiR instance. The Domain should NOT contain “https://” or end with a trailing slash. For example, the domain should look like this <i>esus019064-t066.r1.k-cura.com</i> and not this <i>https://esus019064-t066.r1.kcura.com/</i>. • In very rare cases, C4 may be down, in which case Collect jobs will not start regardless of the collection data source. This issue usually resolves itself after a short waiting period. C4 is the shared compute platform on which jobs are run.
Custodian Email Notification	The Collect job started successfully, but the custodian never received the collection request email.	• Verify that the custodian's email address is the same as the one entered in the Email address field of their corresponding entity record. The Secondary Email address information for the entity is not used. • Verify that the email is not in the Spam or Junk folder. • Verify that the custodian's organization has not intercepted or quarantined the email via an email security policy or software, such as Proofpoint. • If the problem still exists after verifying the information in the previous bullets, then please contact Cellebrite Customer Support to verify that there are no issues sending email messages from Cellebrite.
File Transfers	The file transfers into Relativity aiR are failing.	• Verify that the Context User account used to configure the OAuth2 client is in a group assigned to the workspace, and the group has been given the “Allow Import” and “Allow Export” permissions in Relativity aiR. See Set permissions in Relativity aiR on page 17. • Verify that the Relativity Service Account user is assigned to one of the groups assigned to the workspace. See Set permissions in Relativity aiR on page 17.
Target Failure	The target collection fails after successful start.	If a job successfully started (e.g., was received by Cellebrite), but failed prior to the collection being uploaded to Relativity aiR, then the problem resides within Cellebrite. Please contact Cellebrite Customer Support for assistance.

7 ChatGPT Enterprise data source

This topic provides details on how to capture OpenAI's ChatGPT Enterprise with Collect.

Note: This documentation contains references to third-party software, or technologies. While efforts are made to keep third-party references updated, the images, documentation, or guidance in this topic may not accurately represent the current behavior or user interfaces of the third-party software. For more considerations regarding third-party software, such as copyright and ownership, see [Terms of Use](#).

7.1 Considerations

Note the following considerations about this data source:

- This connector requires a ChatGPT Enterprise subscription.
- OpenAI's Compliance API only keeps data for 30 days. Collect can only retrieve ChatGPT data from the past 30 days.
 - OpenAI does not keep deleted data for more than 30 days, unless legally required otherwise.
 - Temporary chats, also called ephemeral chats, are only available for 30 days. These are conversations where OpenAI's Memory feature is disabled. The chat session is not saved to the user's history.
 - Temporary chats are accessible through the OpenAI Compliance API. They are included in Collect if your date filters are set correctly.
 - Temporary chats must fall within the 30-day retention window to be collected.
 - To avoid missing data, we recommend scheduling regular, ongoing collections before data is removed at the end of the 30-day retention window.
- Before your first collection, confirm that your organization enabled the Compliance API in its OpenAI account. This setting supports retrieval of both persistent and temporary conversations.
- For date criteria, ChatGPT Enterprise supports a start date. Collect retrieves all prompts and responses from the date you specify through the current date.
- If your organization has multiple ChatGPT Enterprise workspaces, you must configure a separate data source for each workspace in the Collect application. Name each data source to identify the workspace connects to.
- Relativity automatically converts collected conversation prompts and responses to Relativity's short message format (RSMF).
- ChatGPT metadata is collected. For more information, see [Collected metadata on the next page](#).

7.2 Prerequisites

Complete the following before setting up a ChatGPT data source in Relativity:

- Eligible Enterprise and Education workspace owners can create a workspace-scoped Admin key with the permissions needed by the integration.
 - Create Admin key on the *Admin Console > Credentials > Admin keys* page.
 - For more information, see [OpenAI's documentation](#).
 - Existing authorized keys do not need replacing just because self-service is available.
 - Contact OpenAI Support only self-service is unavailable.
- Confirm that the Compliance API is enabled in your organization's OpenAI account to support retrieval of both persistent and temporary conversations.

Once you complete the prerequisites, you can begin creating the data source.

7.3 Collection size

ChatGPT Enterprise collections scale with conversation volume and duration.

Category	Details
Hard limits (enforced)	No explicit hard cap published
Planning thresholds (guidance)	High-usage enterprise tenants
When to split	Long date ranges
Notes	Conversion-based scaling

Focus on limiting time ranges in high-usage environments to control collection size.

7.4 Collected metadata

As of the current integration with OpenAI's Compliance API, the metadata fields are captured and included in collections:

The following metadata fields are captured from ChatGPT Enterprise conversations via the Compliance API and included in Collect:

Metadata	Collected
Conversation ID	Always
Conversation title	Always
User ID	Always
User name	When user is logged in.
User email	When user is logged in.
Timestamp of prompt	Always
Timestamp of response	Always
Prompt text	Always
Response text	Always
Edit history	When a prompt was edited before re-execution.
Source attributions	URLs of any publicly cited websites when browsing was enabled.
Attachments	Uploaded files submitted by users during the conversation. For example, PDFs, DOCX, images, CSV files. Generated files. For example, documents or images created by ChatGPT in response to prompts.

These fields are extracted for both persistent and ephemeral (temporary) conversations, as long as they fall within OpenAI's 30-day retention window and meet your search criteria in Collect.

7.5 Creating the data source

Use the following procedure to connect the ChatGPT Enterprise workspace data source to Collect.

In Relativity aiR:

1. Navigate to **Collection Admin** within Collect Admin of Set Up
2. Click the **New Collection Source Instance** button.
 - **Name**—Enter in a unique name for the data source.
 - **Type**—Select the **ChatGPT Enterprise** data source.
 - **Settings**—enter the required information in the Settings fields. For more information, see [Settings fields below](#).
3. Click **Save**. The data source displays on the Collection Admin page.

7.6 Settings fields

To connect Relativity to a ChatGPT Enterprise workspace, you need to gather and enter the information for the following fields.

- **API Key**—enter the API Key that you created in OpenAI.
 - You can use the same API Key when configuring multiple ChatGPT Enterprise data sources from which you wish to collect.
 - For more information, see [OpenAI's documentation](#).

Note: Only contact OpenAI Support if you cannot create your own API Key.

- **Workspace ID**—enter the ChatGPT Enterprise WorkspaceID to which you want to connect.

7.7 Configuring the data source

Each data source used in Collect has different search criteria on the Collection Details step when creating a collection job. The criteria needs to be configured next.

Relativity collects ChatGPT Enterprise chat data in Relativity's short message format (RSMF).

Add search criteria to collect specific data. To configure the data sources, complete the following fields:

- **Select and unselected tabs**—choose the data sources to collect from by moving unselected data sources to the selected list.
- **Field**—choose the field to filter on within the data source.

Note: You must set a Start Date to complete the Data Sources step.

- **Operator**—choose an operator. For example, equals or greater than.
- **Value**—enter a value to find in the selected field.

The following table lists the filter criteria supported for ChatGPT Enterprise collections.

All dates are in Coordinated Universal Time (UTC).

Criteria	Operators	Description	Example
Start Date	Greater Than or Equals	When you use the Start Date property in a query, the search returns prompts and responses that exist the day of and after the entered date.	When you search a Start Date of 1/1/2024, Relativity collects all prompts and responses from that date to today.

Note: Temporary, or ephemeral, chats will also be returned if they occurred within the 30-day retention window and meet your search criteria.

8 Claude

Collect integrates with Claude (Anthropic) to collect enterprise AI conversations and generated content. This integration uses Anthropic's Compliance API and provides read-only access to in-scope data that exists at the time of collection.

Note: This documentation contains references to third-party software, or technologies. While efforts are made to keep third-party references updated, the images, documentation, or guidance in this topic may not accurately represent the current behavior or user interfaces of the third-party software. For more considerations regarding third-party software, such as copyright and ownership, see [Terms of Use](#).

This topic provides details on how to capture Anthropic's Claude Enterprise with Collect.

8.1 Considerations

Note the following considerations about this data source:

- **Account and API access**
 - This connector requires a Claude Enterprise account.
 - The Anthropic Compliance API is only available with an Enterprise subscription.
 - Admin or standard API keys are not sufficient.
 - Only a Compliance access key, created by an Anthropic organization administrator or Enterprise Primary Owner, can retrieve conversation content, files, and artifacts.
- **Retention and deleted data**
 - Relativity collects deleted data only if Anthropic still retains the content.
 - Anthropic does not keep the content of deleted conversations, but it may keep records that the conversation occurred.
 - Your organization sets the retention policy. For more information on retention policies, see Anthropic's documentation.
 - Collection completeness is dependent on Anthropic retention policies and data availability at run time.
- **Collection behavior**
 - If you have multiple Claude organizations, you must configure a separate data source for each organization.
 - We recommend clearly naming each data source.
 - Relativity automatically converts collected conversation prompts and responses to Relativity's short message format (RSMF). For more information, see the Relativity Short Message Format guide.
 - Relativity collects Claude metadata. For more information, see [Collected metadata on the next page](#).
- **Defensibility**
 - Access is read-only.
 - Collect does not modify or delete Claude data.

- Data is retrieved directly via Anthropic's Compliance APIs.

8.2 Prerequisites

Before configuring your data source in Collect, you must enable the Compliance API on Anthropic's side to obtain an API key.

For more information about the Compliance API, see Anthropic's documentation.

Once you enabled the Compliance API, you can begin creating the data source.

8.3 Collected data

When configured with a valid Compliance access key, Collect can retrieve the following data from Claude Enterprise:

- **Conversations**—user prompts and Claude responses, collected in chronological order.
- **Artifacts**—AI-generated outputs such as documents or code artifacts.
- **Files**—user-uploaded and assistant-generated files associated with conversations.
- **Metadata**—custodian, user, timestamps, and conversation identifiers.

To make data review-ready in Collect,

- Collected conversations are ingested as parent documents.
- Artifacts and files linked as child documents or attachments.

8.3.1 Collected metadata

Relativity collects metadata from Anthropic's Compliance API as part of activity logs. For each action, like sending a prompt, getting a response, or uploading a file, Relativity collects all related metadata.

As of the current integration with Anthropic's Compliance API, Relativity captures the following metadata fields in collections:

Metadata	Collected
Conversation ID	Always
Conversation title	Always
User ID	Always
User name	Always
User email	Always
Timestamp of prompt	Always
Timestamp of response	Always
Prompt text	Always
Response text	Always
Edit history	Captures updates when a user edits and re-runs a prompt.
Attachments	Claude generated files, and user uploaded files submitted by users

Metadata	Collected
	during the conversation.

8.3.2 Retention expectations and data availability

Collect retrieves only the Claude data that is retained and accessible at the time of collection.

Collections reflect the current retained state of Claude data and are not a historical reconstruction of all past activity.

Key considerations:

- Claude Enterprise retains conversation content by default, but customers may configure shorter retention periods.
- Conversations or artifacts deleted by users or retention policies cannot be collected.
- Collect cannot reconstruct historical data that no longer exists in Anthropic systems.

8.4 Creating the data source

Use the following procedure to connect the Claude data source to Collect.

In Relativity aiR:

1. Navigate to **Collection Admin**.
2. Click the **New Collection Source Instance** button.
3. Complete the following fields:
 - **Name**—enter a unique name for the data source.
 - **Type**—select the Claude data source.
 - **Settings**—enter the required information in the Settings fields. For more information, see Settings fields.
4. Click **Save**.

After clicking Save, Relativity verifies the parameters and connectivity to the data source instance.

- When verification is successful, Relativity saves the data source.
- When the connection fails, Relativity displays a message indicating that the connection failed.
 - When verification fails, verify that the values are correct.
 - Relativity can only save the data source when the values are correct and verified.

The data source displays on the Collection Admin page.

8.5 Settings fields

To connect Relativity to an Claude workspace, you need to gather and enter the information for the following fields:

- **API Key**—enter the API key that Anthropic provided to your organization. You can use the same API key when configuring multiple Claude data sources from which you want to collect.
- **Organization ID**—enter the Claude Organization ID.

8.6 Configuring the data source

Each data source used in Collect has different search criteria on the Collection Details step when creating a collection job. The criteria needs to be configured in this step.

Relativity collects Claude chat data in Relativity's short message format (RSMF). For more information, the Relativity Short Message Format guide.

Add search criteria to collect specific data. To configure the data source, complete the following fields:

- **Select and unselected tabs**—choose the data sources to collect from by moving unselected data sources to the selected list.
- **Field**—choose the field to filter on within the data source. You must set a Start Date to complete the Data Sources step.
- **Operator**—choose an operator. For example, equals or greater than.
- **Value**—enter a value to find in the selected field.

The following table lists the filter criteria supported for Claude collections:

All dates are in Coordinated Universal Time (UTC).

Criteria	Operators	Description	Example
Created Date	Greater Than, Greater Than or Equals, Less Than, Less Than or Equals	When you use the Created Date property in a query, the search returns prompts and responses that exist the day of and after the entered date.	When you search a Created Date of 1/1/2026 to 12/31/2026, Relativity collects all prompts and responses from that date to the end of 2026.
Updated Date	Greater Than, Greater Than or Equals, Less than or Equals	When you use the Updated Date property in a query, the search returns prompts and responses that exist the day of and after the entered date.	When you search a Updated Date of 1/1/2026 to 12/31/2026, Relativity collects all prompts and responses from that date to the end of 2026.

9 Slack data source

This topic provides details on how to capture Slack data with Collect.

Note: This documentation contains references to third-party software, or technologies. While efforts are made to keep third-party references updated, the images, documentation, or guidance in this topic may not accurately represent the current behavior or user interfaces of the third-party software. For more considerations regarding third-party software, such as copyright and ownership, see [Terms of Use](#).

9.1 Considerations

Review the list of considerations before starting your collection:

- We recommend limiting the volume and number of custodians per job. Limiting both will reduce the collection time and reduce the chance of errors.
- We recommend limiting the date range of the collection. Extended date ranges can increase collection time and potentially create issues.

- We do not recommend collecting each custodian separately, with one collection collecting one custodian target.
 - This creates duplicate chats in cases where the custodians have been chatting with each other.
 - As a result, the collection can be more difficult to manage and review, and it may take longer to complete.
- Collect can retrieve messages from deactivated Slack users if the data still exists. This relies on the `include_historical` parameter.
 - Deactivation and channel membership does not block results. User accounts and message data remain tied to the user ID.
 - Retention is the key limiter. Deleted messages cannot be recovered; gaps require Slack Support review.
- Slack's discovery and compliance API does not support keyword searching.
 - This means Slack collections cannot include keyword-based searches.
 - Cannot use keyword search across direct or group messages.
 - For more information on Slack collection criteria, see [Criteria on page 32](#).

9.1.1 Grouped collection

Slack data is collected into grouped collections. Chat conversations often include multiple custodians in the same message threads or channels. Relativity collects this data as a single grouped data set rather than splitting messages by individual custodian.

For more information on grouped collections, see [Grouped collections on page 43](#).

9.1.2 Attachments and linked cloud files

Relativity includes files directly attached to conversations as children to the parent RSMF file that is generated during collection.

Retrieval of linked cloud files is not supported by Slack's Discovery API. Currently, the Collect application does not support ancillary collections during Slack collections to retrieve linked cloud files. Cloud file links are still present in the conversations contained in the generated RSMF files.

9.1.3 Collection size

Slack collections group shared messages, which improves efficiency, but activity level strongly impacts job size.

Government Slack follows the same general scaling patterns as commercial Slack but may introduce additional latency.

Category	Details
Hard limits (enforced)	30 custodians per job
Planning thresholds (guidance)	Greater than 20 custodians and 6 months or more, an active organization, is often too large
When to split	Greater than 6 months with high activity Greater than 12 months with low activity
Notes	Grouped collection shared messages collected once Gov environment may add latency

9.2 Task checklist

The table lists the order to perform the necessary tasks for setting up the data source for Collect.

Order	Application	Task
1	Slack	Slack application setup below
2	Collect	Creating the data source in Collect below
3	Collect	Configuring the data source in Collect on page 31

9.3 Slack application setup

Before using the Slack data source in Collect, you must create and authorize Collect as an application within Slack.

There are specific steps to connect Slack to Relativity when creating the data source. To set up the Slack data source, you need to enable API access with Slack and then complete the data source settings in Relativity.

For more information, see [Relativity Collect: Collecting from a Slack Enterprise Data Source](#) training video.

Your Slack organization must be on:

- **Enterprise Grid plan**—the Collect application requires the Enterprise Grid plan that provides access to the Discovery API.
- **GovSlack**—you will need a Slack FedRamp account. For more information, see Slack's documentation.

Before Slack can be set up as a Collect data source, the Slack organization owner needs to email exports@slack.com to gain Discovery API access. Follow the instructions on the Enabling an Organization window.

Enabling an Organization

In order for a customer's organizations to access the Discovery API, an org Owner needs to email exports@slack.com and say they'd like to "enable the Discovery APIs for Organization [XYZ]". We will promptly enable access after verifying the email address matches an Owner of the org.

Once Slack confirms your Discovery APIs are enabled for your organization, proceed to set up your Slack data source in Relativity.

9.4 Creating the data source in Collect

After confirming that your Discover APIs are enabled, complete the set up process in Relativity aiR to connect the Slack data source to Collect

Note: You set up data source connections at a workspace level. You only need to set up a given data source connection once in a given workspace. For example, if you have three different workspaces to run collections in, you would need to set up the Slack data source connection three times, once for each workspace. If all collections are from just one workspace, then you only need to set up the data source once.

In Relativity aiR:


1. Navigate to **Collection Admin** within Collect Admin.
2. Click the **New Collection Source Instance** button.
 - **Name**—enter in a unique name for the data source.
 - **Type**—select the **Slack** data source.

3. Click **Install Application**. After clicking the **Install Application**, a window from Slack appears. You must disable pop-ups in your browser to see the window.

Notes:


- If you already logged in, you will see a window with an Allow button to authorize the Collect application. If you did not log in, you must log in as the organization owner. Make sure you enter the organization URL when signing in.
If you logged into multiple organizations, make sure to select the correct one in the drop-down menu in the top-right corner. If you do not know your organization URL, you can find it in the Overview section of **About This Workspace** in Slack.
- Add an organization to the drop-down menu by opening a new window outside of this workflow and sign into another organization. Another option is to log out of the current organization before clicking Install Application and logging in when requested.

-
4. Click the **Allow** button.

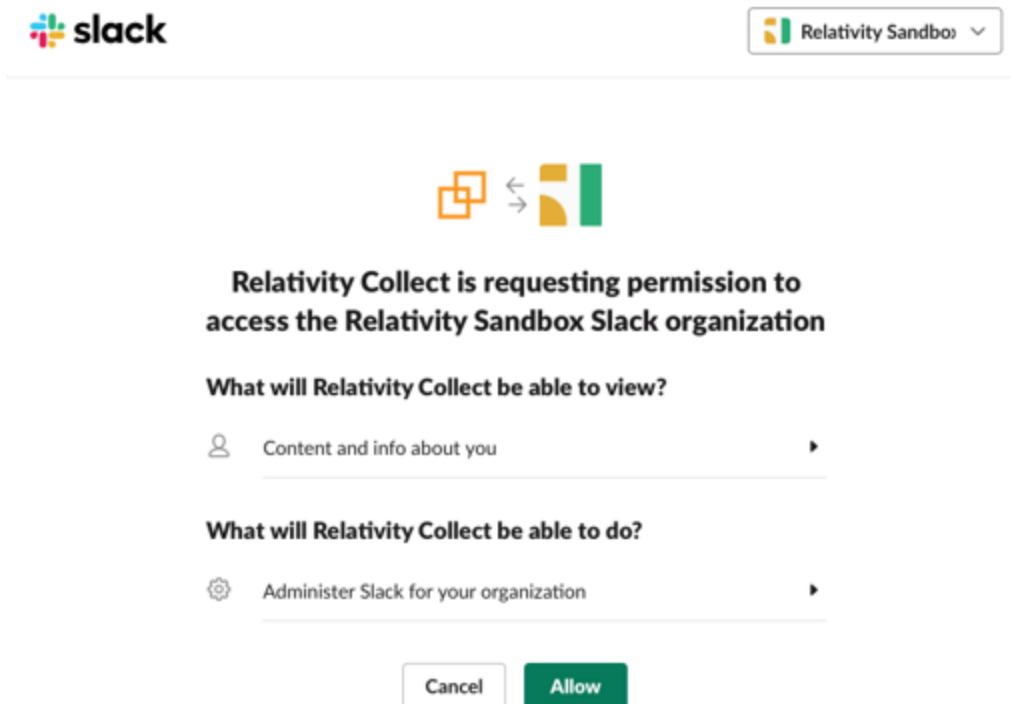

5. After clicking **Allow**, navigate in the same window to a page where you will copy a temporary token.

6. Click **Copy Temporary Code** to copy to your clipboard.

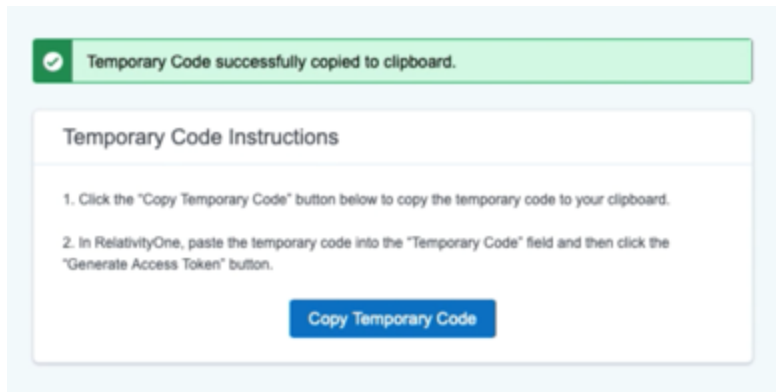

7. Once copied, you can close that window and return to Relativity aiR.
8. In Collect, paste the code in the **Temporary Code** field.
9. Click **Generate Access Token**. The access token will be generated and populated in the Access Token field below.

Notes: Paste this token in the Access Token field in any other additional workspaces you want to setup.

10. Click **Save**.

9.5 Settings fields

To connect Relativity to the Slack data source, you need to gather and enter the information for the following fields. Setting up Slack includes steps outside of Collect. To get the steps to gather the temporary code and access token, see [Slack application setup on page 29](#).

- **Temporary Code**—enter the code provided by Slack after installing application. The Generate Slack Access token section provides steps to retrieve the Temporary Code and Access Token.
- **Access Token**—enter the application token retrieved after authorizing Relativity as an application in Slack. For more information, see [Slack documentation](#).

9.6 Configuring the data source in Collect

Each data source used in Collect has different search criteria on the Collection Details step when creating a collection job. The criteria needs to be configured next.

1. Configure search criteria to collect specific data.
 - **Select and unselected tabs**—choose the data sources to collect from by moving unselected data sources to the selected list.
 - **Field**—choose the field to filter on within the data source.

Note: You must add start and end dates to complete the Data Sources step.

- **Operator**—choose an operator such as equals, contains, greater than, or less than.
 - **Value**—enter a value to find in the selected field.
2. Click **Add Criteria**. Each criteria is separated by an AND operator.

9.6.1 Criteria

The following table lists the filter criteria supported for Slack collections. Slack collections require you to enter the start date and end data criteria. Slack puts a limit on how far back you can run a collection. Your organization's Slack enterprise retention policy sets this time period. For more information, see [Slack documentation](#).

Note: You need to register Relativity in Slack before using this data source. For information on registering Relativity in Slack, see [Slack documentation](#).

When using the Slack data source:

- You can collect Archived Slack channels.
- You cannot collect deleted Slack channels.
- Relativity collects Slack data in Relativity Short Message Format (RSMF).
- RSMF has a 2 GB processing limit. For more information, see the RSMF guide.

All dates are in Coordinated Universal Time (UTC).

Criteria Field	Operators	Description	Example
Channel Name	Equals	When you use the Channel Name property, the search returns all message within the channels that equals the search word or phrase in the channel's name.	If you use the Channel Name property in a query, the search returns all messages that the channel name equals the text you're searching for. In other words, the query does not return only those messages from channels that have an exact match. For example, if you search for subject "finance_team," your results include messages from channels like "finance_team_project."
Conversation Type	Equals	When you use the Conversation Type property in a query, the search returns all messages that were either in a direct message or group message.	If you use the Group Message conversation type in a query, the search results returns messages that exist in group messages. Direct, one-on-one messages will not be included in the collection.
End Date	Less Than Or Equals	When you use the End Date property in a query, the search returns all messages the day of and before the entered date.	If you search a Start Date of 1/1/2001 and an End Date of 1/1/2020, the search returns all messages on and between the two dates. We recommend limiting the date range to maintain a high performance level and a lower collection time.
Inclusive Channels	Equals	When you use the inclusive option, only the specified channels will be collected. You can enter channel names and/or channel IDs; use commas to separate multiple entries.	If you want to include the General and Contracts channels, enter: general, contracts. Note: Channel names and IDs are not case sensitive.
Exclusive Channels	Equals	When you use the exclusive option, all channels except the excluded channels will be collected. You can enter channel names and/or channel IDs; use commas to separate mul-	If you want to exclude the General and Contracts channels, enter: general, contracts. Note: Channel names and IDs are not case sensitive.

Criteria Field	Operators	Description	Example
		tuple entries.	
Slice Interval in Hours	Equals	When you use The Slice Interval in Hours property, the search returns all messages in a specific time range or defaults the slice interval to 24 hours.	If you search with a slice interval set to one hour and a conversation spans five hours, you will end up with five RSMFs after processing.
Start Date	Greater Than Or Equals	When you use the Start Date property in a query, the search returns messages that exist the day of and after the entered date.	If you search a Start Date of 1/1/2001 and an End Date of 1/1/2020, the search returns all messages on and between the two dates. We recommend limiting the date range to maintain a high performance level and a lower collection time.
Workspace Name	Equals	When you use the Workspace Name property, the search returns all messages in all channels within the workspace that equals the search word or phrase in the workspace's name	If you use the Workspace Name property in a query, the search returns all messages that the instance name equals the text you're searching for. For example, if you search for subject "Company A," your results include messages from that instance.

Included in the Slack Criteria are two toggles:

- **Disable RSMF conversion**—enable this toggle to keep data in its original format by preventing Relativity from converting the files into Relativity's short message format (RSMF) files.

Note: Relativity provides you with .json files when running collections with this toggle enabled.

- **Deleted Messages Only**—enable this toggle to collect only deleted messages that fit within the selected criteria.

9.6.2 Configuration considerations

Consider the following when configuring the Slack data source:

- If a Slack channel with same name exists across multiple Slack workspaces within a collection, Collect will collect all content in both channels in both workspaces.
- You can collect Direct Messages, Group Messages, or both Direct and Group messages. Do not select a conversation type if you want to collect all messages.
- The *Slice Interval in Hours* criteria defaults the slice interval to 24 hours. This means Collect will create one file for the conversations within that 24-hour interval. If the conversation goes beyond 24 hours, a second Relativity Short Message File (RSMF) will be created. Another example is if you have a slice interval set to one hour and a conversation spans five hours, you will end up with five RSMFs after processing.
- Collections include deleted messages. Relativity displays deleted messages on the day the user deleted the message, not the day the user sent the message.
 - Also, Relativity collects only the message when a deleted message includes an attachment. Files sent as attachments without a message and then deleted, the metadata is available for 24 hours, but the file is not collected.

- When Relativity collects deleted messages in threads, Relativity displays the messages outside of the thread in the RSMF.
- Relativity collects conversations in public or private channels for each day in the date range regardless if the custodian participated in that channel on a given day.
- When collecting multiple custodians' data, and each custodian is in the same channel, Relativity collects the channel once.

10 Slack best practices

Collection time depends on collection scope, not data size.

10.1 Date range

Date range is one of the biggest factors. Collect reviews every day in every channel across your full date range. Each extra day increases collection time.

Multi-year date ranges are very large.

10.2 Channel scope

Channel scope is the other major driver. Slack content falls into four categories:

- **Direct messages (1:1s)**—private conversations between two users.
- **Multi-person direct messages (MPDMs)**—private group conversations outside channels.
- **Private channels**—invite-only channels.
- **Public channels**—channels open to all workspace members.

Collections with only direct messages and MPDMs are usually the fastest and most manageable. These collections typically do not need to be split by date range.

Adding channels increases scope:

- Private channels increase scope.
- Public channels, especially those with high message volume and many members, can greatly increase collection time.

For large date ranges with thousands or tens of thousands of channels, a single collection job across the full period is likely to fail.

10.3 Recommended approach for large collections

Run separate collection jobs by content type in this order:

1. Direct messages and MPDMs
2. Private channels
3. Public channels

This approach keeps jobs manageable and aligns with typical attorney priorities: direct messages first, private channel activity second, and public channel activity last.

For collections that include private or public channels:

- Start with a 3-month date range.
- If the job completes successfully, expand the range in later collections.
- If the job becomes slow or fails, reduce the date range and continue in smaller increments.

10.4 Intended use

The Slack connector is designed for targeted eDiscovery collections, not bulk data export. Slack's Discovery API supports precise, targeted data collection and is not built for bulk export use cases.

If you need to export large volumes of Slack data:

1. Export the data directly from Slack.
2. Use the Relativity aiR processing engine to convert the export to Relativity Short Message Format (RSMF).

Before you begin, review the [Relativity aiR Processing supported file types for Slack](#) to confirm your export will convert successfully.

11 Collection

Before you begin collecting, you must create a collection job and associate it with a specific matter, custodians, and one or more data sources. Add the custodians, data sources, and other information using the Collect wizard. Once completed, start the collection using the Collect console. Finally, download a results report that details the items collected and a summary report of the entire collection job. For more information, see [Reports on page 47](#).

11.1 Considerations

Before creating a collection for any data source, consider the factors that can affect collection performance.

- Collection time can increase when you use:
 - Large date ranges.
 - A high number of custodians.
 - Multiple collections running at the same time.
- Combining large scopes with high concurrency can slow down collections. This behavior is expected across all data sources.
- When you migrate a Collect workspace, data source credentials do not move with the workspace. You must re-enter credentials before running new Collect jobs. For more information, see [Migrate](#).

11.2 Best practices for time-sensitive collections

To improve performance and reduce collection time:

- Use smaller date ranges whenever possible.
- Limit the number of custodians included in each collection.
- Reduce concurrency, or run collections sequentially when appropriate.
- Create multiple collection jobs when necessary.

Following these practices can help collections complete more quickly and predictably.

11.3 Creating a collection

Before you begin creating a collection, make sure to create a matter. For more information, see [Matters on page 9](#).

Use the following procedure to create a collection:

1. On the Collect tab, click the **Collections** sub-tab. Collect displays a list of the collections currently added to this application.
2. Click **New Collection**.
3. Complete the steps in the Collect wizard. See [Using the Collect wizard below](#)
4. On the Collection Details page, click **Run Collection** in the console. See [Collect console on page 41](#).

11.4 Using the Collect wizard

The Collect wizard takes you through each step to create a collection. After completing the collection setup, run a collection from the Collection console.

Collection wizard security permissions

- **Custodian**—View

When a step is complete, click **Next** or the hyperlink under the next step shown. Click the **Previous** button to move to the previous step. Relativity auto-saves your information when moving between steps. If any required information is wrong or missing, an error message displays and you cannot move to the next step.

11.4.1 Collection Details

Complete the Collection Details step by entering information in the following fields:

- **Name**—the name of the collection. Enter a name using alphanumeric characters only. You cannot use special characters, such as periods, commas, and em dashes. Special characters will cause an error.
- **Collection Matter**—the name of the matter associated with this collection. Click **Edit** to select an existing matter or click **Add** to define a new one. See [Creating a matter on page 9](#).
- **Job Number**—lists a number assigned to the job for reporting purposes.
- **Processing Source Location**—the file repository for collected data to be stored for future processing of documents or for storing collected data. All data sources that produce RSMF have a limit of 2 GB. For more information, see Processing documentation.
- **ZIP Collected Files**—toggle on to compress all collected data into ZIP64 formatted containers. Relativity can compress Microsoft 365, Slack, and X1 data into zip folders.
 - Selecting **Yes** on the Collect Files in ZIP field adds your collected data into containers and puts it into a password protected compressed folder. The compressed folders separated by the custodian target collected. Each custodian target collect has its own folder. These folders will split when reaching a set size. The compressed folders are then stored in the processing staging area by default.
 - You can secure these compressed folders with a password. You can enter a password that you, or another user, needs to enter to open the compressed folder. Relativity stores these passwords in the password bank. You can retrieve them there at a later time.
 - To export your collected data, use the Staging Explorer.
- **Zip Password**—enter a password that is required by anyone attempting to decompress the ZIP64 container files.

- If you have Processing installed in the workspace, Collect automatically populates the Processing Password Bank with the password so it is available at the time the collection is processed.
- Click the Show Password box to display the actual password in the field to ensure the characters are correct.
- Zip is supported by Microsoft 365, Slack, and X1. Google is exported as pre-zipped.
- **Enable Auto-Processing**—toggle on to enable auto-processing. If enabled, select the workspace, profile, and document prefix. Relativity processes all data in a completed collection, or completed with errors collection, after a collection finishes.
 - **Workspace**—select a workspace within your instance to use when creating a processing job.
 - **Processing Profile**—select a processing profile available in the drop-down menu. The available profiles are from the selected workspace.
 - **Document prefix**—select the document prefix option of *Use Entity Document Number Prefix* or *Use Processing Profile Document Number Prefix* to apply to each file in the processing set once it's published to a workspace.
- **Description**—enter a description of the collection used for reporting purposes.
- **Receive Progress Notifications**—toggle on to send or receive collection job status emails. The statuses include:
 - **Completed**—includes completed or completed with errors job status.
 - **Failed**—includes job status and reason for failure.
- **Notification Address**—enter the email address of person that wants to receive collection job statuses.
- **Data Source Type**—select one or more data sources to use in the collection. For more information, see [Data source types on page 14](#).

11.4.2 Data source

Configure the data sources chosen in the Collection Details step. Each data source has different criteria to enter. See the list of data source types under [Data sources on page 13](#) for information on each one.

You can select multiple data sources in the first step if you want to configure all or multiple sources in the step. Switch between each source to configure its criteria by using any of these methods:

- Click the name of the data source in the navigation menu.
- Click **Next** and **Previous** to move you through the data sources.
- Select individual data sources by clicking on the checkbox and then using the right arrows to select them.

11.4.2.1 Data source criteria

Add criteria to collect specific data. To configure the data sources, complete the following fields:

- **Select and unselected tabs**—choose the data sources to collect from by moving unselected data sources to the selected list.
- **Field**—choose the field to filter on within the data source.
- **Operator**—choose an operator such as equals, contains, greater than, or less than.
- **Value**—enter a value to find in the selected field.

After selecting field options, you must click **Add Criteria**. You can add multiple criteria to search data sources.

Note the following about criteria:

- Each criteria is then separated by an AND operator.
- Leave the data source criteria empty to collect all data from the sources.

11.4.3 Custodians

Complete the Custodians step by assigning custodians to the project. Follow the steps below to assign a custodian.

1. From the Unselected custodians table, use the column filters to locate custodians.
2. Select a checkbox next to a custodian.

Notes: If you select multiple Slack custodians in the same collection, the channels they share will only collect once.

- Collect supports up to 30 custodians, or entities, assigned in a collection job.
- If you need more than 30 custodians, you need to create another collection job.
- This limit only applies to the number of custodians.
- There is no limit to the number of targets to be collected.
- For example, you can select 30 custodians and three data sources for a total of 90 targets for the collection job.

3. Click the right arrow  icon to add select custodians. Click double right arrow  icon to add all custodians.
4. Click **Next**.

Note: There is a limit of 10,000 listed custodians with targets in the custodian picker.

11.4.4 Non-custodial

Select non-custodial data sources to complete this step. Non-custodial data means you select the specific locations or archives you want to collect from. Selecting custodians is not required.

To select non-custodial data:

1. Click one or more data sources in the **Select Sources** column.
2. With one of the data sources highlighted, select the check boxes next to the sites you want to collect.
 1. **Smarsh**—Smash organizes data into cases. Select the cases you want to collect from. Collect only supports collection jobs of one case for Smarth.
3. (Optional) Toggle on the **Show selected only** option to display only the locations selected for collection. The selected locations display in a concise list for review before you proceed to the Summary step.
4. Click **Next**.

11.4.5 Collection Summary

Complete the creation of the collection by reviewing all steps, custodians, data sources, and targets, before finalizing.

If Slack custodian targets were not created before you started the project, click **Generate Targets**.

Click **Generate Targets** to check if targets exist for the custodians you have selected for collection. If the targets do not exist, Collect automatically creates them based on the email address contained in the Entity record for each custodian.

11.4.5.1 Targets

In the Targets section, a number appears next to each custodian's name. The number listed is the number of custodian targets found in the associated data source.

Number	Meaning
0	Collect did not find any custodian targets with that email address in that data source.
1	Collect found a single custodian target associated with the email address within the data source.
2+	Collect found multiple custodian targets with that email address within the data source.

The number is also color-coded to indicate how the target was generated:

- **No highlight**—Collect already found and generated the custodian target.
- **Green**—Collect autogenerated the custodian target.
- **Red**—Collect could not autogenerated the custodian target.
 - You can still manually generate it.
 - For more information, see [Creating a custodian target on page 12](#).

Click **View Collection Details** to finish setup. The Collection Details page appears. From the Collection Details page, you can preview and run the collection from the [Collection Summary on the previous page](#).

12 Viewing or editing Collection data

You can view and edit collection details. You can also use the Collect console to start and stop collections and view reports.

12.1 Collection details

You can display the collection details by clicking the name of a collection on the Collections tab. Collect also displays these details immediately after you add a new collection.

On the Collection Details page, use the buttons at the top of the page to edit, delete, go back, edit permissions, or perform other collection tasks. Editing a collection takes you to the first step in the wizard. For more information, see [Using the Collect wizard on page 36](#).

Note: Once a collection has started, the collection details are read-only and cannot be changed.

- **Collection Details**—displays the information that you entered or selected when you created the collection:
 - **Name**—lists the name given to the collection.
 - **Collection Matter**—the matter used in the collection.
 - **Job Number**—the number assigned to the job for reporting purposes.
 - **Description**—the description of the collection used for reporting purposes.
 - **Processing Source Location**—the file repository that collected data is stored for future processing of documents or for storing collected data.
 - **Auto Processing Workspace**—the processing workspace if you toggled the field on.
 - **Auto Processing Profile**—the processing profile if you toggled the field on.
 - **Auto Processing Document Numbering Prefix Option**—the prefix option if you selected one.

- **Job Status**—status of the collection. Statuses are New, Not Started, Started, Completed, Error, and Completed with Errors.
- **Error Message**—the message if collection job did not complete due to errors.
- **Zip Collected Files**—if you selected to zip collected files this box is checked.
- **Zip Password**—the password that everyone needs to use to decompress the ZIP64 container files.
- **Receive Email Notifications**—if you toggled on to send or receive collection job status emails this checkbox is checked.
- **Notification Address**—the email address of the person that will receive collection job statuses.
- **Collection Console**—displays buttons that you can use to perform the tasks listed. See [Collect console on the next page](#).
- **Data Sources**—lists all the collection activities associated with this collection.
 - **Custodian**—the custodian associated with the collection.
 - **Source Instance**—the name of the data source associated with the collection.
 - **Data Type Name**—the name of the target associated with the collection.
 - **Status**—displays one of the following statuses:
 - **Not Started**—the collection has not been started.
 - **Started**—the collection is in progress.
 - **Completed**—the collection is done.
 - **Completed with Errors**—the collection of the target completed and one or more targets had errors. For more information, see the [Errors report on page 48](#).
 - **Failed**—the collection failed. For more information, see [Reports on page 47](#).
 - **Error**—lists the error message if the status is Failed.
 - **Collected Items**—the number of files collected from the target without error. If nothing is collected, a 0 is listed.
 - **Collected Item Total**—the number of files that there are to collect without errors. If nothing is collected, a 0 is listed.
 - **Target**—the custodian target associated with the data source.
 - **Result Link**—a Comma Separated Values file download listing all individual items collected from the target. It contains all the associated metadata for each collected item as well. If no results, the file is empty. For more information, see [Viewing or editing Collection data on the previous page](#).
 - **Error Link**—a Comma Separated Values file download listing any individual items that couldn't be collected because of errors during the collection. The report provides as much metadata as it can along with as much error information as we can get from the source to help identify what caused the error. If no errors, the file is empty. For more information on errors, see the [Errors report on page 48](#).
- **Previews**—the status and estimated number of items and size of collection. This is available after starting a preview. For more information, see [Viewing or editing Collection data on the previous page](#).
- **Custodian Details**—the status of the custodian and the source instance. This card also includes the filter criteria, items, size, and errors.


12.2 Viewing collected data

When Relativity collects the data, Relativity accepts the path names and file names that the source provides. On occasion, the collection source modifies the path name or file name.

There is a difference between viewing grouped and individual collections data. To view grouped collections data, for sources like Bloomberg Chat, Google Chat, Slack, and Teams, click the **Get Results** link to view your collection data. Although the Data Sources table will show N/A in the Collected Items and Collected Item Total columns, the collected data is still available in the download. These columns show N/A because more than one set of custodian data is included in the collection.

12.3 Collect console

After completing a setup, run the collection with the collection console. Verify connection, start or stop a collection, and view a collection report from the Collection console on the Collection Details page.

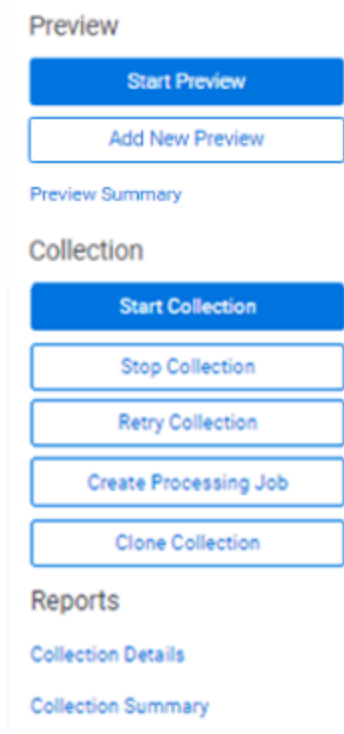

12.3.1 Collection

Once you decide to move forward with your collection, you will use this section of the console to start, stop, and adjust your collection job.

12.3.1.1 Start Collection

Click the **Start Collection** button to begin the collect project.

12.3.1.2 Stop Collection

Click **Stop Collection** to end the collection project that is currently running. Once you click this button, a warning pop-up message appears to confirm that you want to stop. Once you stop a collection, the collection cannot be restarted.

12.3.1.3 Retry Collection

The Retry Collection button is only available when a collect job does not complete because of errors. Click **Retry Collection** to start another collect job that only retries the targets that have failed. You cannot retry targets that completed successfully.

12.3.1.4 Create Processing Job

Click **Create Processing Job** to create a processing set from the collected documents from the data sources. Locate these documents in the Processing Source Location set in Collection Details.

When you click the Create Processing Job button, a pop-up window displays with two fields:

- **Select a workspace**—select a workspace within your instance to select a Processing profile to use when creating a processing job.
- **Select a Processing Profile**—select a processing profile available in the drop-down menu. The available profiles are from the selected workspace.
- **Select a Document Numbering Prefix Option**—select *Use Processing Profile Document Number Prefix* or *Use Processing Profile Document Number Prefix* to apply to each file in the processing set once it is published to a workspace.
- **Clone Profile**—toggle off to use the selected processing profile. Toggle on to clone the selected processing profile and use the clone profile in conjunction with the created processing set.

Submit Collection to Processing?

A new processing job will be created within the workspace's Processing application. If you clone the selected profile, a new profile will be created and assigned to the job. Otherwise the selected profile will be used.

Select a Workspace:

Select a Processing Profile:

Select a Document Numbering Prefix Option:

Clone Profile: ☐

After selecting a processing profile and deciding on cloning the profile, click the **Submit Collection** button. Once you submit the collection, Relativity creates a processing set with the same name as the collection job. The processing set includes all data that was collected in the collection job.

12.3.1.5 Clone Collection

Click **Clone Collection** to duplicate the open collect job. You can clone any collect job that has a status other than New.

After clicking the Clone Collection button, a pop-up modal displays the progress and completion of the clone.

Once the job is cloned, it is placed in the Not Started status and you can find it in the Collections list under the same name with "Cloned - YYYY-MM-DD HH.MM.SS" amended to the end. All collection totals for the cloned job associated targets are reset to zero. The Collection Detail Custodian Target fields are reset to zero. The cloned collect job also generates the new targets.

12.3.1.6 Reports

Collect includes comprehensive reporting capabilities that you can use to view information about your collections. You can generate these reports in the collection console within a collection project. Click on the name of a report to download. When generating a report, Relativity downloads different files through your browser. For more information on specific reports, see [Reports on page 47](#).

12.4 Delete collections

A collection will not delete if they have an existing custodian tied to it.

When you delete a collect job, Relativity deletes all of the related custodian targets for the job. The custodian targets table remain the same. The targets within Custodian Targets are not related to any specific collect jobs. Relativity creates job-specific copies of the custodian targets for the job when it's created.

13 Grouped collections

A grouped collection means that all conversations for the selected custodians are combined into a single set of RSMF output files.

This approach is used to:

- Minimize collection size
- Prevent duplicate conversations

If each custodian were collected separately, any shared conversations, such as direct messages, group chats, or shared channel content, would be collected multiple times. This would:

- Increase the overall data volume
- Expand storage requirements
- Require additional downstream deduplication effort during processing and review

13.1 Grouped data sources

Within Collect, there are short message data sources that Relativity collects in a grouped format when more than one custodian is selected.

Grouped collection data sources:

- Microsoft 365 Teams
- Slack
- Google Chat

13.2 Grouping messages

Grouping ensures that shared content is collected once. This helps reduce duplicates and keeps the dataset consistent.

When viewing grouped collection results on the Collect job details page, the reported artifacts collected and collection size show the same value for all involved custodians. This reflects that there is one collection of RSMFs containing all chats for the collected custodians.

The reported *Items* collected is the number of RSMF files that were generated during the collection. We currently do not support reporting the number of individual messages attributable to each custodian independently. The reported *Size (GB)* represents the aggregate size of all generated RSMF files.

Custodian Details							1	- 3 of 3	10	per page	
Artifact ID	Preview #	Job Type	Status	Custodian	Source Instance	Filter Criteria	Items		Size (GB)		Item Errors
1601200		Collection	Completed	Rawitt, Blake	Slack	Start Date Greater Than Or Equals 03/27/2023, End Date Less Than Or Equals 03/29/2023			4 0.02		
1601201		Collection	Completed	Evans, Gregory	Slack	Start Date Greater Than Or Equals 03/27/2023, End Date Less Than Or Equals 03/29/2023			4 0.02		
1601202		Collection	Completed	Suresh, Cathy	Slack	Start Date Greater Than Or Equals 03/27/2023, End Date Less Than Or Equals 03/29/2023			4 0.02		

13.3 Custodian assignment considerations

Grouped collections create a limitation during processing because the Processing capability supports only one custodian per processing set data source.

Relativity assigns an Entity representing the data source as the custodian for the processing set when using *auto-processing* or the *Create Processing Job (on-demand)* feature in Collect.

This prevents the system from applying a single custodian to the entire RSMF dataset, which would incorrectly suggest all messages belong to one person.

13.4 Manual processing guidance

When manually creating a processing set, you encounter the same limitation of needing to assign a single custodian to the grouped RSMF data.

Recommended approach:

- Create or use an Entity of type *Other*
- Name the Entity to clearly represent the data set

Example: *Slack – Acme Matter – 2026-02-10*

This approach accurately reflects that the data set represents multiple custodians and maintains consistency with Collect's automated processing behavior.

14 Migrate Collect workspaces

When you migrate a Collect workspace, using *Archive, Restore, and Migrate (ARM)* or *Integration Points*, Relativity moves workspace data but does not move data source credentials.

After the migration, you must re-enter credentials before you can run Collect jobs.

Note: This behavior applies to all Collect data sources.

14.1 Migrate Collect workspaces

You can migrate Collect workspaces using ARM or Integration Points.

During a migration:

- Relativity restores the Collect workspace and its objects.
- Relativity does not restore data source credentials.
- Data sources appear in the restored workspace but are not connected.

Relativity does not provide a supported way to move or copy Collect credentials. This protects sensitive authentication information.

14.2 Credentials do not migrate

To protect from compromising sensitive authentication information, Relativity does not support moving or copying Collect credentials from migration.

14.3 After migration

Until you re-enter credentials, Collect cannot access the data sources.

After a migration:

- Data sources appear in the restored workspace.
 - The credentials will not work.
 - The connections are invalidated.
- You must re-enter the credentials for each data source and revalidate each data source.
- New collection jobs cannot be run until the data sources are connected again.

Note: You do not need to remake the credentials for the data sources. If the existing credentials are still valid you need to re-input.

14.3.1 Considerations

Consider the following when using Microsoft or Google:

- **Microsoft 365**—the app created for Microsoft 365 data sources has a secret value which is only exposed on initial creation.
 - This secret value must be stored and re-entered correctly for the data source to work.
 - If the Secret Value is forgotten, please generate a new secret value.
- **Google**—for Google data sources, a refresh token is generated on the first Google data source that was set-up and used for subsequent Google data sources.
 - This refresh token value must be stored and re-entered in the data sources in order for the data sources to work.
 - If the token is invalidated or forgotten, please see Troubleshooting for instruction on generating a new refresh token.

15 Identifying Collection data in Staging Explorer

This section helps to identify the components of the folder information within the Staging pane of the Staging Explorer as it relates to the Collections setup fields.

Use the sample screen below as a general guide for each data source type.

The screenshot shows the 'Collection Demo - PM' page in the Collect interface. The page displays details for a collection named 'GCE Logistics' with a Workspace ID of 1187585 and an Artifact ID of 3819941. The 'Staging Explorer' pane shows the file path structure: \\files\T002F\ProcessingSource\Collections\1187585\GCE Logistics_3819941. Arrows indicate the mapping of values from the 'Collection Demo - PM' page to the 'Staging Explorer' pane.

Here is a breakdown of the folder components within the Staging pane of the Staging Explorer:

\\files\<T####>\ProcessingSource\Collections\<WorkspaceID>\<CollectionName>_
<CollectionArtifactID>\<DataSourceArtifactID>

- The Processing Source Location from the Collections page becomes the file location for the data in Staging Explorer. It contains a sub-folder for Collections to house the Collection data. Using the above example, it would be:

\\files\T002F\ProcessingSource\Collections

- The Workspace ID folder in the Staging pane corresponds to the Workspace ID number listed after the "AppID=" in the URL. For example, 1187585 would be the Workspace ID from this URL: kcur-a.relativity.one/Relativity/RelativityInternal.aspx?AppID=1187585...

\\files\T002F\ProcessingSource\Collections\1187585

- The Name of the Collection from the Collections page and the Collection Artifact ID become the folder name within the Workspace ID folder. Using the above example, it would be:

\\files\T002F\ProcessingSource\Collections\1187585\GCE Logistics_3819941

- The Artifact ID of the data source used becomes the sub-folder. Using the above example, they would be:

```
\\files\T002F\ProcessingSource\Collections\1187585\GCE Logistics_3819941\3819948
\\files\T002F\ProcessingSource\Collections\1187585\GCE Logistics_3819941\3819949
```

In the case of grouped collections, such as Teams and Slack, there will be a folder within the collection folder corresponding to the data source type. Using Teams as an example, the file structure would be:

```
\\files\T002F\ProcessingSource\Collections\1187585\GCE Logistics_3819941\Teams
```

16 Reports

Collect offers comprehensive reporting capabilities that you can use to view information about collections. You can set options to generate these reports based on matter and collection as well as other combinations.

16.1 Running reports

You can generate these reports in the collection console within a collection project. Click on the name of a report to download. Locate the Collection Summary and Collection Details report in the collection console. Locate the Results and Error report in the Data Sources table on the Collection Details page.

When generating a report, Relativity downloads different files through your browser.

Note: All report timestamps are in UTC.

16.1.1 Collection Summary report

The Collection Summary report includes the target, target status, number of items collected, and the collection size. The report is grouped by custodians. Grouping by custodians makes it easy to sort the targets for each custodian with subtotals for each custodian. Grand totals are at the end of the report. The report downloads as a PDF file.

This report also includes filters that were used at any point in the collection. For example, if a modification date that is greater than or equal to 1/1/2010 is added at the criteria level, then that filter is listed in the summary report table. If no filter criteria was specified for the job, the report lists a "No Filter Criteria Applied" message.

Group-type data sources are also included in the list of data sources. This section is at the beginning of the report. For example, if you collect from Outlook calendars, Outlook mailboxes, and Slack, all collection summaries are included in the report.

The short message grouped collections lists the custodians involved in the collect, along with the data sources. The top of the report includes the custodian list. This section's title is "Short Message Grouped Collections." The report table includes the data source, target status, the number of items collected, and the collection size in gigabytes.

16.1.2 Collection Details report

The Collection Details report includes two files: the first file includes the successfully collected results of all items and their metadata. The second file includes the errored collection data. The error file includes as many of the items and as much of the items' metadata as it can. The report downloads as a CSV file.

This report, both files, is also stored in the assigned Entra ID file share. It is included in the collection output.

16.1.3 Results report

The Results report link for each target downloads as a CSV or XML file that contains a list of all individual items collected. These items include emails, files, or other data. It contains all of the associated metadata for each item. If no items were collected the file is empty.

The Results report is a CSV file download of the results collected from Bloomberg, Box, iManage, Microsoft, Refinitiv Ikon, Slack, or X1 targets.

16.1.4 Errors report

A Comma Separated Values file download of the errors that occurred during the collection from the target. If no errors occurred, the file is empty.

If the application is reporting errors with requests, creating objects, or parsing, check for correct permissions, check for healthy connections, and check if the fileshare is working. If the setup is correct, start diagnosing errors.

16.1.4.1 Errors.csv


The report file lists one error per line. Each item is listed with an error ID alongside the message of the error that caused the item failure. Per-item errors only occur in the download phase of the collection; if an error occurs before (for example, if data is unavailable during our check) or after (for example, the worker cannot write the results.csv file to the fileshare) then there will be no record in the errors.csv report.

17 Status Summary

In Collect, you manage multiple collect jobs and you need to track all of them.

17.1 Job status

The job status dashboard to see the statuses of collection jobs. You can drill into each job from this dashboard. Able to look into the targets by custodian, data sources, or status to find out more about your collections. Focus on the collected components with this dashboard.

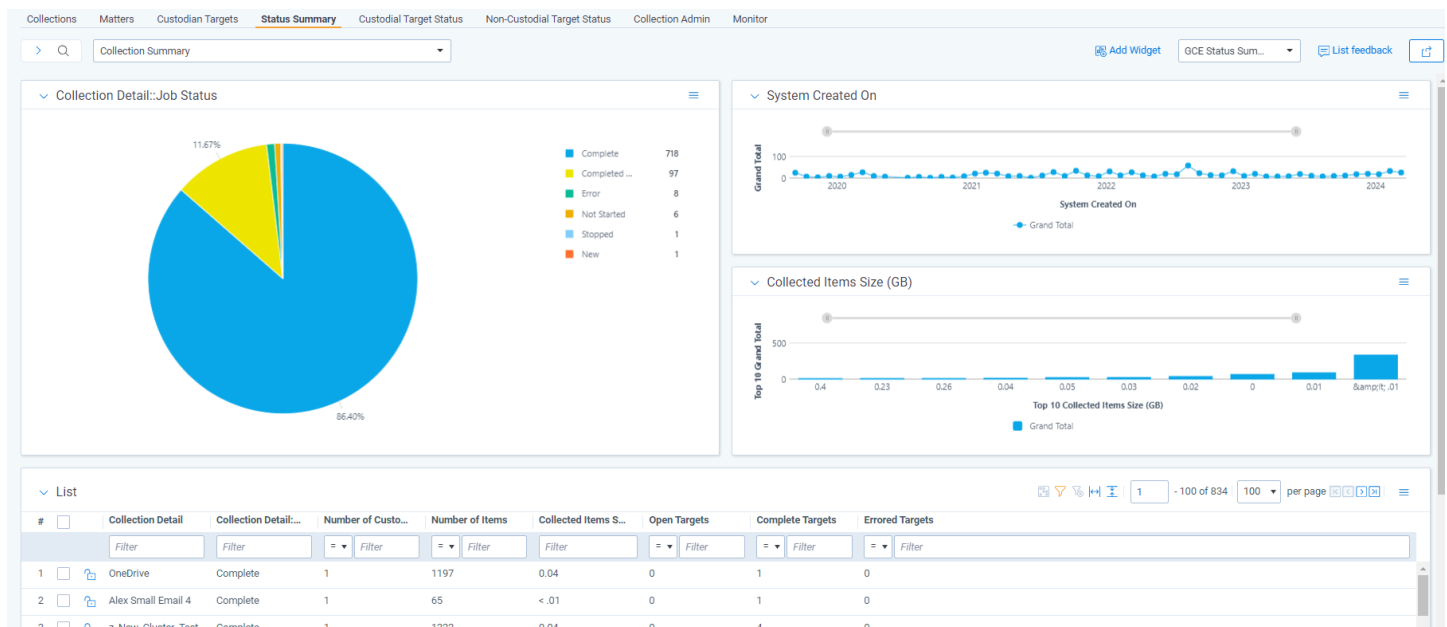

17.2 Reviewing job statuses

The job status dashboard is available after generating targets. To learn how to generate targets for a collection, see [Collection Summary on page 38](#). Once you generate targets, the dashboard organizes by collection jobs.


Status:

- **Not started**—the collection is set up, but hasn't been started.
- **Started**—the collection started and has not completed.
- **Completed**—the collection of the target completed without any errors.

- **Completed with Errors**—the collection of the target completed and had individual items that couldn't be collected. For more information, see the [Errors report on the previous page](#).
- **Error**—the collection did not run successfully and couldn't collect from the target.

18 Target Status

The Target Status tab is a dashboard to see the statuses of collections. You can drill into each target from this dashboard. Able to look into the targets by custodian, data sources, or status to find out more about your collections. Focus on the collected components with this dashboard.

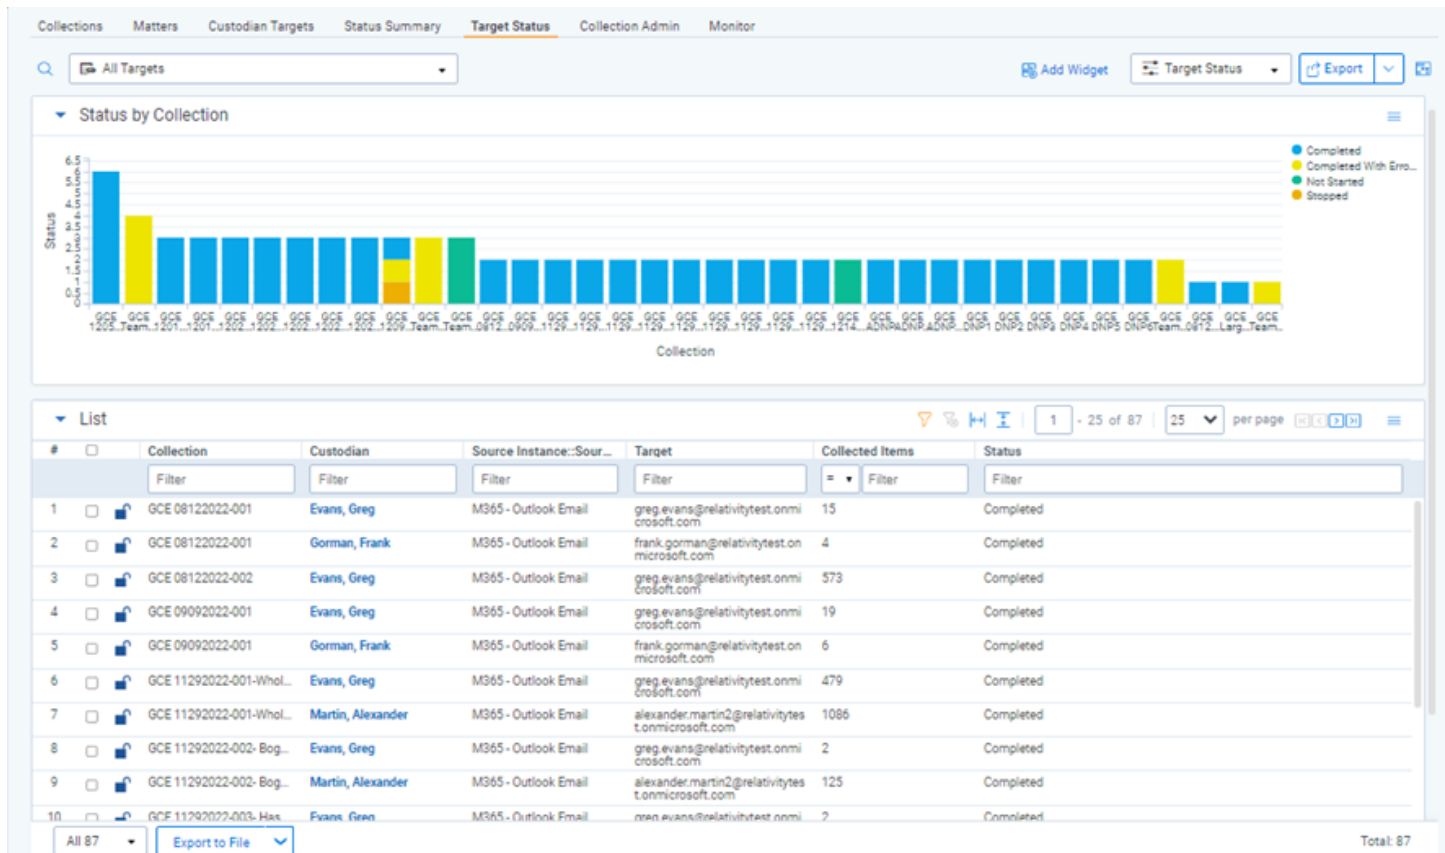

19 Monitor

Monitor pending, running, and completed collect jobs in the Monitor tab. The Monitor page only tracks collect jobs from the last 24-hour time range.

- **Queued**—this column lists the created collect jobs that have not started.
- **Running**—this column lists collect jobs in progress and with their current progress displayed in a status bar.
- **Completed**—this column lists collect jobs completed successfully, completed with errors, the amount of data collected, and the elapsed time.

Proprietary Rights

This documentation (“**Documentation**”) and the software to which it relates (“**Software**”) belongs to Relativity ODA LLC and/or Relativity’s third party software vendors. Relativity grants written license agreements which contain restrictions. All parties accessing the Documentation or Software must: respect proprietary rights of Relativity and third parties; comply with your organization’s license agreement, including but not limited to license restrictions on use, copying, modifications, reverse engineering, and derivative products; and refrain from any misuse or misappropriation of this Documentation or Software in whole or in part. The Software and Documentation is protected by the **Copyright Act of 1976**, as amended, and the Software code is protected by the **Illinois Trade Secrets Act**. Violations can involve substantial civil liabilities, exemplary damages, and criminal penalties, including fines and possible imprisonment.

©2026. Relativity ODA LLC. All rights reserved. Relativity® is a registered trademark of Relativity ODA LLC.

20 Index

C

Collect 35, 47

Collect wizard 36