



RelativityaiR Integration Points Guide

October 7, 2026

Table of Contents

1 Integration Points	4
1.1 Integration Points scenarios	5
2 Installing Integration Points	5
2.1 Installing Integration Points	5
2.1.1 RIP AAD Provider	6
3 Security permissions	6
3.1 Permissions	6
3.2 Submit a job for a non-Relativity source provider	6
3.3 Submit a job with Relativity as the source provider and display console errors for that job	6
3.4 Create an integration point for a non-Relativity source provider	7
3.5 Create an integration point with Relativity as the source provider	7
3.6 View an integration point with any source provider	9
3.7 Create and edit an integration point with any source provider	9
3.8 Create an integration point with a Relativity source provider	10
3.9 Create an integration point with any source provider from an integration point profile	10
3.10 View any integration point profile	10
3.11 Create and edit an integration points profile with any source provider	10
3.12 Create and edit an integration points profile with a Relativity source provider	11
4 Integration Points profiles	11
4.1 Creating Integration Point profiles	11
4.2 Copying Integration Point profiles	15
4.2.1 Configuring an Integration Point Profile for copying	15
4.2.2 For Setup	16
4.2.3 For Connect to Source	16
5 Importing data through Integration Points	17
5.1 Considerations	17
5.2 Creating an import Integration Point	17
5.2.1 Import sources	17
5.3 Importing a .csv file	18
5.3.1 Setup	18
5.3.2 Connect to source	20
5.3.3 Map fields	21

5.4 Importing LDAP	23
5.4.1 Setup	23
5.4.2 Connect to source	25
5.4.3 Map fields	26
5.5 Importing a document load file	28
5.5.1 Setup	28
5.5.2 Connect to source	30
5.5.3 Map fields	32
5.6 Importing an image load file	34
5.6.1 Setup	34
5.6.2 Source information	36
5.7 Importing a production load file	38
5.7.1 Setup	39
5.7.2 Source information	40
5.8 Importing from Microsoft Entra ID	42
5.8.1 Setup	43
5.8.2 Connect to source	44
5.8.3 Map fields	45
5.8.4 Reporting on Microsoft Entra ID imports	47
5.9 Manually running the import job	47
5.10 Disabling a scheduled Integration Point job	49
5.11 Scheduler date format considerations	50
5.12 Automatically stopping a scheduled job that repeatedly fails	51
6 Exporting data through Integration Points	52
6.1 Exporting a folder to load file	52
6.2 Exporting a folder and subfolders to a load file	61
6.3 Exporting a production to a load file	69
6.4 Exporting a saved search to a load file	77
6.5 Exporting to a Relativity workspace	85
6.6 Running the export job	85
6.6.1 Stopping and restarting an export job	86
6.7 Stopping (disabling) an Integration Point from promoting data	87
6.8 Scheduler date format considerations	88
6.9 Automatically stopping a scheduled job that repeatedly fails	89

7 Transferring (promoting) data between workspaces	90
7.1 Considerations	90
7.2 Exporting to a Relativity workspace	91
7.2.1 Considerations	91
7.2.2 Setup	92
7.2.3 Connect to Source	95
7.2.4 Map Fields	96
7.3 Mapping saved searches	102
7.4 Working with transferred documents	102
7.4.1 Reusing coding decisions	103
7.5 Calculating integration point job statistics on-demand	103
8 Monitoring job history and errors	105
8.1 Job History	105
8.1.1 Viewing job history details	107
8.2 Job History Errors	109
8.2.1 Status and description reference	110
8.2.2 Item-level errors versus job-level errors	111
8.3 Troubleshooting job history errors	112
9 Viewing destination workspaces	114
10 Microsoft Entra ID provider	115
10.1 Registering an Azure application and credentials	116
10.2 Finding Azure credentials	117
10.3 Removing application access	117

1 Integration Points

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

Integration Points offers a solution to configure integrations from third party systems to Relativity objects and between Relativity workspaces. For more information, see [Transferring \(promoting\) data between workspaces on page 90](#).

Interested developers can create a separate ADS application to pull data from a third party system source provider. Integration Points ingests that application to handle the scheduling, setup, field mapping, and actual import into Relativity. By using the Integration Points platform, developers can reduce the amount of time needed to create these custom integrations while end users receive a consistent and easy setup approach.

In addition to supporting developer-built custom integrations, Integration Points also provides a built-in integration to Lightweight Directory Access Protocol (LDAP) enabled HR servers such as Microsoft Active Directory. Built on the Integration Points platform, the LDAP integration can filter and schedule imports from Active Directory data into a Relativity workspace. For example, the workstations, employee names, and data shares, among others.

Note: You can locate an application's version number by navigating to Applications & Scripts > Application Library tab. You must be a system admin to access this tab.

1.1 Integration Points scenarios

Using Integration Points as a developer

You are the lead developer of an organization responsible for building Relativity customizations. One of your clients started tracking all of their litigation-related information outside of Relativity in a new product called Whazootie. They mention to you that they would love to have this same information available in their Relativity workspaces to tie their document review to specific case information.

You use Whazootie's APIs to build a simple Relativity application to connect to a Whazootie website without building any import or setup steps. You give the application to your client along with Integration Points for them to install in a workspace. They can use all the security, scheduling, setup, and import options available in Integration Points along with the Whazootie connection to set up multiple imports that bring Whazootie data into their Relativity workspace.

Using Integration Points as an end user

You are the litigation support professional responsible for setting up workflows and templates to help manage your company's legal hold procedure using Legal Hold. You want to ensure that all custodian information is kept up-to-date so that holds always go to the correct email address and that the litigation team is aware of custodians who have changed departments or left the company. Unfortunately, all of the custodian information is scattered across multiple company HR servers containing unnecessary computer and network data.

To solve this problem, you use the Integration Points setup wizard to configure new integrations to each HR server, mapping items to specific Relativity fields. You work with your team to configure a filter in each setup so that only the appropriate employees are brought in as Custodians and schedule the import to occur automatically each night during off-hours. As a result, your custodian address book is always up-to-date, ensuring that proper litigation workflows are followed with every custodian.

2 Installing Integration Points

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

To successfully use Integration Points, you need to install the Integration Points application to at least one workspace.

Note: If you are a current Relativity aiR user, and you want to install or upgrade this application, you must contact the Customer Support team.

2.1 Installing Integration Points

Integration Points uses the ADS framework. You can install it from the Application Library to the current workspace or to multiple workspaces at once.

Once you install Integration Points, the necessary agents deploy automatically.

2.1.1 RIP AAD Provider

The AAD Provider application is also available in the Application Library and does not require a separate download or manual installation.

- If you plan to import data from Microsoft Entra ID, install the RIP AAD Provider application to your workspace from the Application Library.
- For more information, see [Microsoft Entra ID provider on page 115](#).

For more information, see Relativity applications.

3 Security permissions

The following tables provide detailed breakdowns of the security permissions required to use Integration Points.

3.1 Permissions

3.2 Submit a job for a non-Relativity source provider

To submit a job for a non-Relativity source provider, such as FTP, LDAP, or load file, and display console errors for that job, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Workspace	View, Edit, Add
Source	Integration point	View
Source	Job History	View, Edit, Add
Source	Destination Provider	View
Source	Source Provider	View
Source	Integration Point Type	View
Destination	Destination RDO	View, Edit, Add
Destination	Allow Import	Admin operation

3.3 Submit a job with Relativity as the source provider and display console errors for that job

To submit a job with Relativity as the source provider and display console errors for that job, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Workspace	View, Edit, Add
Source	Integration point	View
Source	Job History	View, Edit, Add
Source	Destination Provider	View
Source	Source Provider	View

Workspace	Object/operation/tab	Permission type
Source	Integration Point Type	View
Source	Document	View, Edit
Source	Search	View, Edit, Add
Source	Advanced & Saved Searches The saved search that you use for the integration point must have an owner of Public.	Browser
Source	View Workspace Details	Admin operation
Destination	Destination Workspace	View, Edit, Add
Destination	Allow Export	Admin operation
Destination	View Workspace Details	Admin operation

3.4 Create an integration point for a non-Relativity source provider

If you are creating an integration point for a non-Relativity source provider, such as FTP, LDAP, or load file, Relativity assumes you have the following system admin permissions:

Workspace	Object/operation/tab	Permission type
Source	Integration point	View, Edit Edit is required for adding Job History RDO's.
Source	Job History	View, Edit, Add
Source	Job History Error	View, Edit, Add Edit is required to mark errors as new and expired

3.5 Create an integration point with Relativity as the source provider

If you are creating an integration point with Relativity as the source provider, Relativity assumes you have the following system admin permissions:

Note: This feature supports feature permission actions. Each action grants access to a specific task within the feature. You can grant groups access to individual actions, allowing them to perform only the tasks they need. To grant access to the entire feature, select all of its actions. Manage feature actions on the Features tab in a group's workspace permissions. For instructions, see [Setting workspace permissions](#). For more information about feature permissions, see [Feature permissions](#).

Permissions

>>

RIP Sync

×

Workspace Security

Groups

Features NEW

Object Security

Tab Visibility

Other Settings

Selected Group

Legal Hold Security Admin

Features

Search...

Analysis

☐ Assist

0/5 of actions

☐ Conceptual Analytics

0/3 of actions

☐ Imaging User

2 presets available

☐ OCR User

2 presets available

☒ RIP Sync

4/4 of actions

☐ Sentiment Analysis

Review - Applications

☐ Automated Workflows

☐ Review Management

☐ Transcripts

0/2 of actions

Description

Controls access to RIP Sync integration points, profiles, job history, documents, and the import/export jobs that move data between workspaces.

Actions

☒ Select all

☒ View RIP Sync

☒ Manage RIP Sync

☒ Delete RIP Sync

☒ Secure RIP Sync

>> [Granular permissions mapping](#)

Review and Save

Revert All

Close

Workspace	Object/operation/tab	Permission type
Source	Destination workspace	View, Edit, Add Edit is required to rename destination workspaces.
Source	Sync Configuration - Stores initial configuration of the RIP job. - This object is populated with information once a RIP job is launched for the first time in a workspace.	View
Source	Sync Batch - Stores execution batch information for each job, tracking the batch execution - This object is populated with information once a RIP job is launched for the first time in a workspace.	View

Workspace	Object/operation/tab	Permission type
Source	Sync Progress - Stores information about the overall progress of the job. - This object is populated with information once a RIP job is launched for the first time in a workspace.	View
Source	Sync Statistics - Stores transfer statistics. - This object is populated with information once a RIP job is launched for the first time in a workspace.	View
Destination	Manage Object Types This is required to create new object types.	Admin operation
Destination	Source workspace	Add, Edit Edit is required for situations when Relativity renames the destination workspace upon a source workspace name change.
Destination	Source job	Add

3.6 View an integration point with any source provider

To view an integration point with any source provider, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Job History	View
Source	Integration point	View
Source	Integration point type	View

3.7 Create and edit an integration point with any source provider

To create and edit an integration point with any source provider, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Integration point	View, Edit, Add - Edit is only required if you're editing the integration point. - Add is only required if you're creating the integration point.

Workspace	Object/operation/tab	Permission type
Source	Integration point type	View
Destination	Allow Import	Admin operation

3.8 Create an integration point with a Relativity source provider

To create an integration point with a Relativity source provider, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Allow Import	Admin operation

3.9 Create an integration point with any source provider from an integration point profile

To create an integration point with any source provider from an integration point profile, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Integration point profile	View

3.10 View any integration point profile

To view any integration point profile, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Integration point profile	View
Source	Source provider	View
Source	Destination provider	View
Source	Integration point type	View

3.11 Create and edit an integration points profile with any source provider

To create and edit an integration points profile with any source provider, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Integration Point Profile	View, Edit, Add - Edit is only required if you're editing the integration point profile. - Add is only required is you're creating the integration point profile.
Source	Integration Point Type	View

Workspace	Object/operation/tab	Permission type
Source	Source Provider	View
Source	Destination Provider	View
Destination	Allow Import	Admin operation

3.12 Create and edit an integration points profile with a Relativity source provider

To create and edit an integration points profile with a Relativity source provider, you need the following permissions:

Workspace	Object/operation/tab	Permission type
Source	Allow Import	Admin operation

If you do not have sufficient permissions and you attempt to perform either of the following actions, you will see an error message stating "You do not have sufficient permissions. Please contact your system administrator." In each case, Relativity creates an error listing all missing permissions.

- Loading the integration points console or clicking Run Now or Retry:
 - If the error occurs after a button click, the message is prefixed with, "Failed to submit integration job."
 - If the job is a retry job, the prefix reads, "Failed to submit the retry job."
- Saving an integration point after creating a new one or editing an existing one.

Note: Integration points is tenant-aware. This means that workspace admins within a tenancy receive an error if they attempt to push to a workspace they do not have permissions to. This error occurs when they click Run Now on the integration point that they create to push documents to review.

4 Integration Points profiles

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

You have the option of creating and saving Integration Points profiles, which can be used to run future common import or export jobs through Integration Points without having to recreate them each time. The profiles can be specific to each data source so that you can reuse the settings and avoid having to remap fields multiple times.

4.1 Creating Integration Point profiles

You can create in Integration Point profile through the Integration Point Profile tab. Or, if you are in the process of creating or editing an Integration Point job, you can save it as a profile for future use from the Transfer Options console. Both methods are described below.

To save a newly created or edited integration point as a profile, follow the steps below:

1. While on the create or edit Integration Points window, click the **Save as Profile** button on the Transfer Options console.

Integration Point Details
Edit
Delete
Back
Edit Permissions
View Audit
1 of 1

General
Scheduling

Name	Natives Only	Log Errors	Yes
Overwrite	Append/Overlay	Has Errors	No
Export Type	Workspace; Natives	Email Notification Recipients	
Source Details	Saved Search: Sample	Total of Documents	Press 'Calculate statistics' button
Source Workspace	JJG - Source	Total of Natives	Press 'Calculate statistics' button
Source Relativity Instance	This instance(RelativityOne US)	Create Saved Search	Yes
Transferred Object	Document	Tag Documents	Yes (Source and Destination Workspaces)
Destination Workspace	JJG - Data v. Transfer		
Destination Folder	JJG - Data v. Transfer		
Multi Select Overlay	Use Field Settings		
Use Folder Path Info	No		
Move Existing Docs	No		

Transfer Options
Run
Retry Errors
View Errors
Calculate statistics
Save as Profile

- Enter a descriptive name to help identify the profile in the **Integration Point Profile Name** field and click **Ok**. Note that the Integration Point Profile Name field defaults to the name you originally gave the integration point you created. You can change it, if desired, or keep it as is.

Save Integration Point as Profile

Integration Point Profile Name *
Documentation export
Ok
Cancel

To create a profile through the Integration Point Profile tab, follow the steps below:

- Select the **Integration Point Profile** tab.
- Click **New Integration Point Profile**.
- Complete the required fields as needed. The fields and layouts for creating a profile here are identical to those for creating any integration point that you intend to run. For more information, see [Importing data through Integ-](#)

[Integration Points](#) [Job History](#) [Job History Errors](#) [Destination Workspaces](#) **[Integration Point Profile](#)**

Create Integration Point Profile Cancel i

Setup

Complete the Setup

12

← Back

Next →

General

Name:

Type: ☐ Import ☒ Export

Source:

Destination:

Transferred Object:

Profile:

Advanced

Email Notification Recipients:
Separate by semi-colon

Log Errors: ☒ Yes ☐ No

Scheduling

Enable Scheduler: ☐ Yes ☒ No

- Once the profile is saved, you do not have the option to run it. Instead, you see a detailed layout of the profile you just created.

Integration Point Profile Layout
Edit
Delete
Back
Edit Permissions
View Audit
1

General
Scheduling

Name	Documentation export	Log Errors	Yes
Overwrite Fields	Append/Overlay	Email Notification Recipients	
Source Provider	Relativity	Promote Eligible	No
Destination Configuration	<pre>{ "artifactTypeID": 10, "DestinationArtifactTypeID": 10, "CaseArtifactId": 27535753, "CopyFilesToDocumentRepository": false, "EntityManagerFieldContainsLink": false, "DestinationFolderArtifactId": 1003697, "ExtractedTextFieldContainsFilePath": false, "ExtractedTextFileEncoding": "utf-16", "FieldOverlayBehavior": "Use Field Settings", "UseDynamicFolderPath": false, "IdentityFieldId": 0, "importNativeFile": true, "importNativeFileCopyMode": "Copy Files", "ImportOverwriteMode": "Append Overlay", "LongTextColumnThatContainsPathToFullText": null, "Provider": "relativity", "destinationProviderType": "74A863B9-00EC-4BB7-9B3E-1E22323010C6", "SelectedCaseFileRepoPath": null, "AutoNumberImages": false, "ProductionImport": false, "ImageImport": false, "MoveExistingDocuments": false, "ProductionPrecedence": 0, "IncludeOriginalImages": false, "ImagePrecedence": 0, "ProductionArtifactId": 0, "CreateSavedSearchForTagging": true, "TaggingOption": "Enabled", "UseFolderPathInformation": false, "FolderPathSourceField": 0, "UseSmartOverwrite": false, "OverlayIdentifier": "Control Number", "ArtifactTypeName": "Document" }</pre>		
Source Configuration	<pre>{ "SavedSearchArtifactId": 1075881, "TypeOfExport": 3, "ProductionImport": false, "SourceWorkspaceArtifactId": 27715332, "TargetWorkspaceArtifactId": 2753575 }</pre>		

- Once a profile is saved, it's visible in the Integration Point Profiles tab.

Integration Point Profile				
New Integration Point Profile All Profiles Add Widget				
1				
#	Name	Type	Source Provider	Destination Provider
	Filter	Filter	Filter	Filter
1	Documentation Exp...	Export	Relativity	Relativity

Note: To configure an Integration Point profile that can be copied to another workspace, see [Configuring an Integration Point Profile for copying below](#).

Once the profile is created, you have the option of applying it to a new Integration Point by selecting it in the **Profile** field on the Setup layout.

Create Integration Point

Setup

Complete the Setup

1

2

General

Name:

New export

Type:

☐ Import

☒ Export

Source:

Relativity

Destination:

Relativity

Transferred Object:

Document

Profile:

Select...

If the Destination workspace is changed after the fields have been mapped, the fields will automatically be remapped. The artifacts are mapped based on their names only if the ArtifactIDs are different in the new destination workspace. This mapping occurs so that the integration points job will not fail. Therefore, if the source workspace fields cannot match to the new destination workspace fields, those unmatched fields are presented at the end of the mappings list for easy identification. Relativity also displays a message to inform you that the original source fields from the profile were mapped with corresponding fields from the destination workspace.

4.2 Copying Integration Point profiles

You can copy the configuration of a Relativity Integration Point profile from a template workspace to a new workspace as long as the profile's Type field is set to **Export** and the Source and Destination fields are set to **Relativity**. This profile configuration is considered a non-document object. For a list of non-document objects that can be copied, see the Admin Guide. Once copied to the new workspace, the profile's fields are mapped and are editable.

Note: If the Integration Point Profile configuration has the Type field set to Import or Export and the Destination field set to Loadfile, it will not be copied to the new workspace.

4.2.1 Configuring an Integration Point Profile for copying

In order to copy a profile to another Relativity workspace, it has to be configured a certain way.

To properly configure an Integration Point profile so that can be copied to another Relativity workspace, set the fields as shown below.

4.2.2 For Setup

- **Name**—enter a profile name of your choice.
- **Type**—select **Export**. This field must be set to Export for the profile to be copied.
- **Source**—select **Relativity**. This field must be set to Relativity for the profile to be copied.
- **Destination**—select **Relativity**. This field must be set to Relativity for the profile to be copied.
- **Transferred Object**—select the Document or non-document object meta data you want to sync to the destination workspace. The non-document object must already exist in the destination workspace.
- **Profile**—select a profile of your choice.

4.2.3 For Connect to Source

- **Source**—defaults to saved search.

Notes: When updating the connection to source for the copied profile, the Source field defaults to Saved Search. The Saved Search field is empty and you need to select the saved search of your choice whether it's the same saved search as the original profile or a different saved search.

- **Saved Search**—select the saved search of your choice.
- **Destination Workspace**—select the destination workspace of your choice.
- **Location**—select a location of your choice.
- **Create Saved Search**—select Yes or No.

The screenshot shows the configuration form for an Integration Point profile. It is divided into two main sections: 'Source' and 'Destination'. The 'Source' section has two dropdown menus: 'Source' (set to 'Saved Search') and 'Saved Search' (set to 'Select...'). The 'Destination' section has a dropdown for 'Destination Workspace' (set to 'Copy Profiles'), a 'Location' section with two radio buttons ('Folder' and 'Production Set'), and a 'Create Saved Search' section with two radio buttons ('Yes' and 'No'). The 'Folder' radio button is selected, and the 'Production Set' radio button is also selected. The 'Create Saved Search' section has the 'No' radio button selected. There are 'Select...' buttons next to the 'Folder' and 'Production Set' radio buttons, and a '+' button next to the 'Production Set' radio button.

Once the above fields are configured, the profile is ready to use for copying.

When you are ready to create a new workspace using the profile, go to Workspaces and click the **New Workspace** button. Then, click **Select** next to Template Workspace and select the workspace in the list with the Integration Points profile that you want to use. For more information on creating a workspace template, see the Admin Guide.

5 Importing data through Integration Points

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

Integration Points provides you with the ability to import a .csv file, LDAP, or load file directly into your workspace, and schedule future or recurrent import jobs.

Note: This documentation contains references to third-party software, or technologies. While efforts are made to keep third-party references updated, the images, documentation, or guidance in this topic may not accurately represent the current behavior or user interfaces of the third-party software. For more considerations regarding third-party software, such as copyright and ownership, see [Terms of Use](#).

5.1 Considerations

Consider the following before importing data through Integration Points:

- Although importing and exporting a load file is still possible in Integration Points, this functionality will be deprecated in the near future. For continued stability and efficiency, Import/Export is the recommended application for load file imports and exports going forward.
- All integration points jobs are fully editable after run.
- Changing root folder permissions during import is not a supported workflow.

5.2 Creating an import Integration Point

The general workflow for creating Integration Points to import data are listed below. For specific details and parameters surrounding each type of integration point you need to create, refer to the other sections in this topic:

1. Navigate to **Integration Points** in your workspace.
2. On the Integration Points tab, click **New Integration Point**.
3. Set up the new integration point parameters.
4. Connect to the data source by setting up the connection parameters.
5. Map the import fields.
6. Click **Save**.

Once you save the integration point, you can run the import job. For more information, see [Manually running the import job on page 47](#).

5.2.1 Import sources

With Integration Points, you can import data from the following sources:

- [FTP, .csv file](#)
- [LDAP](#)
- [Document load file](#)

- [Image load file](#)
- [Production load file](#)
- [Microsoft Entra ID](#)

5.3 Importing a .csv file

Note: Opening a new port for your Relativity aiR instance will require a Security assessment.

5.3.1 Setup

To create an integration point for importing an FTP (CSV file), begin by configuring the Setup parameters.

1. Complete the fields in the **Setup** layout:

Create Integration Point [Cancel] ⓘ

Setup 1 Complete the Setup 2 [Back] [Next]

General

Name:

Type: ☒ Import ☐ Export

Source: ▼

Destination: ▼

Transferred Object: ▼

Profile: ▼

Advanced

Email Notification Recipients:

Log Errors: ☒ Yes ☐ No

Scheduling

Enable Scheduler: ☐ Yes ☒ No

General:

- **Name**—the name of your integration for reference purposes.
- **Type**—select **Import** to designate the job as a data import. Selecting Import makes all of the possible import sources available for selection in the Source field below.

- **Source**—select **FTP (CSV File)** to sync to a custodian list on an FTP Server to automatically update custodian information in your workspace. We strongly recommend using a secured FTP server and not using anonymous authentication.
- **Destination**—by default, this is set to **Relativity** and is uneditable when you select Import as the type, since you have already designated that you want to import into a Relativity workspace. You will select the specific workspace on a subsequent layout.
- **Transferred Object**—select the specific Relativity Dynamic Object to which you want to import the data. If you are importing the entity object, select **Entity** here.
- **Profile**—complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you have already created, select it from the drop-down list. For more information, see the Integration Points guide.

Advanced:

- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity doesn't log these item level errors.
 - Regardless of your selection, job-level errors are always recorded in Relativity.

Scheduling:

- **Enable Scheduler**—gives you the option of scheduling additional imports. Selecting Yes makes the following fields available:
 - **Frequency**—the interval at which Relativity syncs this integration point. Select one of the options below:
 - **Daily**—select this option to sync once every day.
 - **Weekly**—select this option to sync on a weekly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # week(s)** field for how often you want it to occur weekly.
 - **Send On**—specify on which day of the week (Monday through Sunday) the sync will take place by selecting any of the days of the week listed.
 - **Monthly**—select this option to sync on a monthly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # month(s)** field for how often you want it to occur monthly.
 - **Send On**—select the **Day # of the month** that you want this integration point to sync.
 - **Start Date**—the date that you want Integration Points to start syncing the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop syncing the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point syncs. This time is local to your PC, not

to the server.

- **Time Zone**—select the appropriate time zone.

2. Click **Next** to advance to the Connect to Source layout.

5.3.2 Connect to source

Continue to create your import integration point by connecting Relativity to the data source by following the steps below.

1. In the **Connect to Source** layout, complete the following fields:

The screenshot shows the 'Create Integration Point' window. At the top, there's a title bar with 'Create Integration Point' and a 'Cancel' button. Below it is a progress bar with three steps: 'Setup' (marked with a checkmark), 'Connect to Source' (marked with a '2' and is the active step), and 'Map Fields' (marked with a '3'). To the right of the progress bar are 'Back' and 'Next' buttons. The main content area is divided into two sections: 'Connection Information' and 'File Information'. Under 'Connection Information', there are input fields for 'Host', 'Protocol' (a dropdown menu currently showing 'FTP'), 'Port' (a text box with '21'), 'Username', and 'Password'. Under 'File Information', there is a 'CSV Filepath' field with the example text 'e.g. /export/nightlyexport/yyyy-MM-dd_HRIS_export'.

Connection Information:

- **Host**—the FTP (File Transfer Protocol) or SFTP (SSH File Transfer Protocol) server address. For example, *filetransfer.example.com*. If Relativity cannot locate this address, you will receive an error stating that the remote could not be resolved, and you will not be able to proceed.
- **Protocol**—select the FTP or SFTP protocol.
- **Port**—the server port to which you want to connect. The FTP protocol default Port number is 21. The SFTP protocol default Port number is 22. The standard network ports 21 or 22 should be open on both Relativity aiR and FTP server for outgoing connections from Relativity aiR's Web and Agent servers and for listening (FTP server). Some firewall solutions may impact the connectivity between Relativity aiR and the FTP server.

Note: If you need to open any port, please contact [Relativity Support](#) and allow at least three days to respond. Opening a new port for your Relativity aiR instance requires a Security assessment. To successfully import an FTP (CSV file), the standard network ports should be open on both Relativity aiR and FTP server for outgoing connections from Relativity aiR's Web and Agent servers and for listening (FTP server). Note that the firewall solutions may impact the connectivity between Relativity aiR and the FTP server.

- **Username**—(Optional) the username to use for authentication. If left blank, Integration Points will use "anonymous."

- **Password**—(Optional) the associated password to use for authentication. If left blank, Integration Points will use "anonymous."

File Information:

- **CSV Filepath**—the location of the .csv file that Integration Points imports from the FTP/SFTP server. If you set the generated .csv file to always include the date, you can specify this file path value to use date wildcards so that Integration Points always imports the latest file. For example, the following file path will import the most recently dated file:

*/export/nightlyexport/*yyyy*-*MM*-*dd*_HRIS_export.csv*

- Wildcards are case sensitive.
- The wildcard feature only pulls data from a file name with the current date.
- You can also use hh:MM:ss for hours, minutes, and seconds, with capital M's for minutes. When using times, only file names within the last hour are found.

2. Click **Next** to advance to the Map Fields layout, which contains a list of Relativity fields from their destination RDO as well as attributes that the source provider pulled back.

5.3.3 Map fields

Map the attributes or fields so that Integration Points imports the targeted data into specific Relativity fields.

1. In the **Map Fields** wizard, you have the following options for mapping fields:
 - Click the **Map All Fields** button to automatically map all Source fields with matching Destination field names, except single and multiple object fields.
 - Use the Shift+click and Ctrl+click method to select multiple fields at a time.
 - Use the single and double arrow buttons or double-click a field to move the selected fields between columns.
 - If you have Destination Fields that are mapped to fields in the Field Catalog, Relativity tries to find name matches between these Catalog Fields, as well.
 - The field names in the Destination columns include the type of each field listed.

When mapping fields, here are some issues to note:

- If the WebAPIPath instance setting in kCura.IntegrationPoints is not configured correctly after upgrade or installation, the Source Fields list will be empty because it cannot return any attributes. As a result, you cannot map fields.
- When importing the Entity object:
 - You need to map the First Name and Last Name fields. In case the Full Name field is not being mapped, those two fields are combined for the Full Name value, which is then written to the Entity object.
 - You can link the imported entity to a manager if the manager also exists in the entity database. To proceed with linking them, you must map the Manager field on the Field Mappings page. Previously this was done via the Entity Manager Contains Link option, which has been deprecated.

- We recommend setting the Unique Identifier field to UniqueID.

2. Complete the following import Settings on the **Map Fields** layout:

- **Overwrite**—determines how the system overwrites records once you promote data to the review workspace. This field provides the following choices:
 - **Append Only**—promote only new records into the review workspace.
 - **Overlay Only**—update existing records only in the review workspace. Any documents with the same workspace identifier are overlaid. This field acts as a link indicating to Relativity where to import the data. When you select this or Append/Overlay, you must complete the Multi-Select Field Overlay Behavior field described below.
 - **Append/Overlay**—adds new records to the review workspace and overlays data on existing records. When you select this or Overlay Only, you must complete the Multi-Select Field Overlay Behavior field described below.
- **Multi-Select Field Overlay Behavior**—determines how the system overlays records when you promote documents to the review workspace. This field is only available if you have selected either Overlay Only or Append/Overlay above. This field provides the following choices:
 - **Merge Values**—merges all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Replace Values**—replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Use Field Settings**—merges or replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace according to the overlay behavior settings in the environment.

- **Unique Identifier**—this option is only available when the Overwrite mode is set to Overlay Only.
 - Enter a unique value that no other item in the workspace contains. For example, use the GUID or distinguishedName attribute.
 - If the value is not unique in the workspace, it may lead to unintentional overwriting of existing data.

Note: We recommend setting the Unique Identifier field to UniqueID. Using a name field can cause an error because there is the possibility of having two custodians with the same name.

3. Click **Save** to save the Integration Point.

Once you save the Integration Point, you can run the import job. For more information, see the Integration Points guide.

5.4 Importing LDAP

Before importing LDAP (Lightweight Directory Access Protocol), the Integration Points LDAP Provider needs to be connected to the LDAP server. To connect successfully, open the standard network ports for both Relativity aiR and the LDAP Server for outgoing connections from Relativity aiR's Web and Agent servers and for listening (LDAP Server). To connect these ports, contact [Relativity Support](#).

Note: To successfully connect Integration Points LDAP Provider to the LDAP server, the standard network ports should be open on both Relativity aiR and the LDAP Server for outgoing connections from Relativity aiR's Web and Agent servers and for listening (LDAP Server). LDAP connection requires using 636 (Secure Socket Layer) network ports. Custom ports are not supported and may not work correctly. Please be aware that firewall solutions may impact the connectivity between Relativity aiR and LDAP server.

5.4.1 Setup

To create an integration point for importing LDAP:

1. In the **Setup** layout, complete the following fields:

General:

- **Name**—the name of your integration for reference purposes.
- **Type**—select **Import** to designate the job as a data import. Selecting Import makes all of the possible import sources available for selection in the Source field below.
- **Source**—select **LDAP** here, since you want to import data from a Lightweight Directory Access Protocol source. For example, use this source provider to import an organization's people directory.
- **Destination**—by default, this is set to **Relativity** and is uneditable when you select Import as the type.
- **Transferred Object**—select the specific Relativity Dynamic Object to which you want to import the data. It is typical to use the LDAP source to sync the Entity object.
- **Profile**—complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you have already created, select it from the drop-down list. For more information on profiles, see the Integration Points guide.

Advanced:

- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity doesn't log these item level errors.

- Regardless of your selection, job-level errors are always recorded in Relativity.

Scheduling:

- **Enable Scheduler**—gives you the option of scheduling additional imports. Selecting Yes makes the following fields available:
 - **Frequency**—the interval at which Relativity syncs this integration point. Select one of the options below:
 - **Daily**—select this option to sync once every day.
 - **Weekly**—select this option to sync on a weekly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # week(s)** field for how often you want it to occur weekly.
 - **Send On**—specify on which day of the week (Monday through Sunday) the sync will take place by selecting any of the days of the week listed.
 - **Monthly**—select this option to sync on a monthly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # month(s)** field for how often you want it to occur monthly.
 - **Send On**—select the **Day # of the month** that you want this integration point to sync.
 - **Start Date**—the date that you want Integration Points to start syncing the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop syncing the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point syncs. This time is local to your PC, not to the server.
 - **Time Zone**—select the appropriate time zone.

2. Click **Next** to advance to the Connect to Source layout.

5.4.2 Connect to source

Continue create your import integration point by connecting Relativity to the data source. Follow the steps below.

1. In the **Connect to Source** layout complete the following fields:

The screenshot shows the 'Create Integration Point' dialog with the 'Connect to Source' step selected. The progress bar at the top shows three steps: 'Setup' (completed with a checkmark), 'Connect to Source' (current step, highlighted with a blue circle and the number 2), and 'Map Fields' (next step, highlighted with a blue circle and the number 3). Navigation buttons 'Back' and 'Next' are visible. The 'Source Connection' section contains the following fields:

- Connection Path:** A text input field.
- Object Filter String:** A text input field with the placeholder text 'Leave blank to filter (objectClass=*)'.
- Authentication:** A dropdown menu with 'Select...' as the current selection.
- Username:** A text input field.
- Password:** A text input field.
- Import Nested Items:** Radio buttons for 'Yes' and 'No', with 'No' selected.

- **Connection Path**—the URL used to locate the directory. For example, "Relativity.com." You will need to add **636** to the URL to access that port. Also, note that you can optionally include specific organizational unit references by adding a forward slash (/) after the server. The following example looks up items in the Relativity.com domain within the Employees organizational unit: `ldap.Reliativity.com:636/OU-U=Employees,OU=Accounts,OU=Relativity,DC=Relativity,DC=corp`

Note: Contact [Relativity Support](#) to open port 636.

- **Object Filter String**—this string specifies certain attributes that the requested LDAP entries must contain that Integration Points considers for import. For example, if you want to import users, you would use an object filter string such as `(objectClass=user)`. For more information on search filter syntax, refer to this Microsoft article: [Search Filter Syntax](#).
- **Authentication**—Secure Socket Layer is the only applicable authentication type for port 636.
- **Username**—if required by the server's authentication, enter a username to connect to the server (connection path). For external SaaS LDAP instances, the username may need to include user ID (UID), organization unit (ou), organization's distinguished name (o) and the connection path:
`uid=johndoe,ou=Users,o=6065d44947314c4eb10ca904,dc=somesaasldap,dc=com`
- **Password**—if required by the server's authentication, you can enter a password to connect to the server (connection path).
- **Import Nested Items**—select **Yes** for the import to include all sub directories in the specified connection path. Select **No** for the import to include only the first level items brought back in the connection path.

2. Click **Next** to advance to the Map Fields layout, which contains a list of Relativity fields from their destination RDO as well as attributes that the source provider pulled back.

5.4.3 Map fields

Map the attributes or fields so that Integration Points imports the targeted data into specific Relativity fields.

1. In the **Map Fields** wizard, you have the following options for mapping fields:

- Click the **Map All Fields** button to automatically map all Source fields with matching Destination field names, except single/multiple object fields.
- Use the Shift+click and Ctrl+click method to select multiple fields at a time.
- Use the single and double arrow buttons or double-click a field to move the selected fields between columns.
- If you have Destination Fields that are mapped to fields in the Field Catalog, Relativity tries to find name matches between these Catalog Fields, as well.
- The field names in the Destination columns include the type of each field listed.

When mapping fields, here are some issues to note:

- If the WebAPIPath instance setting in kCura.IntegrationPoints is not configured correctly after upgrade or installation, the Source Fields list will be empty because it cannot return any attributes. As a result, you cannot map fields.
- When importing the Entity object:
 - You need to map the First Name and Last Name fields. In case the Full Name field is not being mapped, those two fields are combined for the Full Name value, which is then written to the Entity object.
 - You can link the imported entity to a manager if the manager also exists in the entity database. To proceed with linking them, you must map the Manager field on the Field Mappings page. Previously this was done via the Entity Manager Contains Link option, which has been deprecated.

The screenshot displays the 'Map Fields' wizard interface. At the top, a progress bar shows three steps: 'Setup' (completed), 'Connect to Source' (completed), and 'Map Fields' (current step, indicated by a blue circle with the number 3). Navigation buttons 'Back' and 'Save' are visible.

The main area is titled 'Field Mappings' and contains a 'Map All Fields' button. It is divided into four columns:

- Source Fields (12):** A list of fields including Business Title, Escalation Email, Location, Manager ID, Primary Work Phone, Status, Termination Date, Work City, Work Country, Work State Province, Worker SubType, and Worker Type.
- Selected Source Fields (5):** A list of fields including Email, First Name, Last Name, Manager, and Employee ID.
- Selected Destination Fields (5):** A list of fields including Email (Fixed-Length Text), First Name (Fixed-Length Text), Last Name (Fixed-Length Text), Manager (Single Object), and UniqueID (Object Identifier).
- Destination Fields (35):** A list of fields including Address 1 (Fixed-Length Text), Address 2 (Fixed-Length Text), BCC People (Multiple Object), CC Recipients (Multiple Object), City (Fixed-Length Text), Company (Fixed-Length Text), Country (Fixed-Length Text), Current Title (Fixed-Length Text), Custodian Interaction (Single Choice), Custodians (Multiple Object), Department (Fixed-Length Text), Document numbering prefix (Fixed-Length Text), Domain (Fixed-Length Text), Employee Number (Fixed-Length Text), Employee Status (Fixed-Length Text), Employment End Date (Date), Employment Start Date (Date), Location (Fixed-Length Text), Middle Name (Fixed-Length Text), Notes (Long Text), Past Department (Fixed-Length Text), Past Manager (Fixed-Length Text), Past Title (Fixed-Length Text), and Phone Number (Fixed-Length Text).

Below the field lists is a 'Settings' section with three dropdown menus:

- Overwrite:** Set to 'Append/Overlay'.
- Multi-Select Field Overlay Behavior:** Set to 'Use Field Settings'.
- Unique Identifier:** Set to 'UniqueID'.

2. Complete the following import Settings on the **Map Fields** layout:

- **Overwrite**—determines how the system overwrites records once you promote data to the review workspace. This field provides the following choices:

- **Append Only**—promote only new records into the review workspace.
- **Overlay Only**—update existing records only in the review workspace. Any documents with the same workspace identifier are overlaid. This field acts as a link indicating to Relativity where to import the data. When you select this or Append/Overlay, you must complete the Multi-Select Field Overlay Behavior field described below.
- **Append/Overlay**—adds new records to the review workspace and overlays data on existing records. When you select this or Overlay Only, you must complete the Multi-Select Field Overlay Behavior field described below. You are able to create folders or re-folder documents when you select Append/Overlay.
- **Multi-Select Field Overlay Behavior**—determines how the system will overlay records when you push documents to the review workspace. This field is only available if you have selected either Overlay Only or Append/Overlay above. This field provides the following choices:
 - **Merge Values**—merges all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Replace Values**—replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Use Field Settings**—merges or replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace according to the overlay behavior settings in the environment.
- **Unique Identifier**—this option is only available when the Overwrite mode is set to Overlay Only. Enter a unique value that no other item in the workspace contains. For example, use the GUID or distinguishedName attribute. If the value is not unique in the workspace, it may lead to unintentional overwriting of existing data.

3. Click **Save** to save the Integration Point.

Once you save the Integration Point, you can run the import job. For more information, see the Integration Points guide.

5.5 Importing a document load file

Note: Before creating an integration point to import a load file, you must first place the load data in the \\Fileshare\\StructuredData folder. Otherwise, you will not be able to select that data for the Import Source field.

5.5.1 Setup

To create an integration point for importing a document load file, follow the steps below.

1. In the **Setup** layout, complete the following fields:

General:

- **Name**—the name of your integration for reference purposes
- **Type**—select **Import** to designate the job as a data import. Selecting Import makes all of the possible import sources available for selection in the Source field below.
- **Source**—select **Load File** here, since you want to import a load file into a workspace. On the Connect to Source layout, you'll have the option of specifying whether you're importing a document, image, or production load file.
- **Destination**—by default, this is set to **Relativity** and is uneditable when you select Import as the type, since you've already designated that you want to import into a Relativity workspace. You'll select the specific workspace on a subsequent layout.
- **Transferred Object**—select the specific Relativity Dynamic Object to which you want to import the data. Since you're importing the document object, select **Document** here.
- **Profile**—complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you've already created, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).

Advanced:

- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.

- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity doesn't log these item level errors.
 - Regardless of your selection, job-level errors are always recorded in Relativity.

Scheduling:

- **Enable Scheduler**—gives you the option of scheduling additional imports. Selecting Yes makes the following fields available:
 - **Frequency**—the interval at which Relativity syncs this integration point. Select one of the options below:
 - **Daily**—select this option to sync once every day.
 - **Weekly**—select this option to sync on a weekly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # week(s)** field for how often you want it to occur weekly.
 - **Send On**—specify on which day of the week (Monday through Sunday) the sync will take place by selecting any of the days of the week listed.
 - **Monthly**—select this option to sync on a monthly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # month(s)** field for how often you want it to occur monthly.
 - **Send On**—select the **Day # of the month** that you want this integration point to sync.
 - **Start Date**—the date that you want Integration Points to start syncing the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop syncing the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point syncs. This time is local to your PC, not to the server.
 - **Time Zone**—select the appropriate time zone.

2. Click **Next** to advance to the Connect to Source layout.

5.5.2 Connect to source

Continue to create your import integration point by connecting Relativity to the data source. Follow the steps below.

1. In the **Connect to Source** layout complete the following fields.

Create Integration Point

Cancel

Setup Connect to Source Map Fields

← Back Next → Preview On

Load File Settings

Import Type: Document Load File

Workspace Destination Folder: Select...

Import Source: Select...

Start Line: 0

File Encoding

File Encoding: Unicode (UTF-8)

Column: □ (ASCII:020)

Quote: p (ASCII:254)

File Column Headers:

Load File Settings:

- **Import Type**—select the type of load file you'd like to import to the workspace. Select **Document Load File** from the drop-down list.
- **Workspace Destination Folder**—select the specific folder within the destination workspace in which you want to place the documents you are importing. The folder tree you see when you click this drop-down menu is identical to the folder structure in the destination workspace.
- **Import Source**—click the down arrow and select a load file from the workspace's DataTransfer import location in the fileshare.
 - These locations are hard-coded into Relativity and cannot be changed. You cannot load or export data to a different location than is listed here.
 - For reference purposes, the folder(s) displayed in the Import Source field actually reside in the following generic path: \\Fileshare\\StructuredData. Accordingly, when an admin adds data to the Import folder inside the DataTransfer folder inside the folder displaying the workspace's artifact ID, that data then becomes available for selection in the Import Source field.
- **Start Line**—select the line number in the load file where you want the import process to begin. The default value is 1, which results in loading the entire file.

File Encoding:

The following fields are only available if you selected Document Load File for the Import Type field above.

- **File Encoding**—select an encoding for the document load file. (Consult your processing vendor or department to determine the correct encoding option, if necessary.) If your file contains a language other than English, choose a Unicode option. Note the following details about encoding:
 - Relativity immediately applies any changes that you make to the encoding of a load file, and displays these changes in the column header preview.
 - Relativity provides you with the ability to audit the encoding of a load file.
 - **Column**—select the character used to separate columns.
 - **Quote**—select the character used as the text qualifier.
 - **Newline**—select the character used to indicate the end of a line in any extracted text or long text field.
 - **Multi-Value**—select the character used to separate choices within a field.
 - **Nested Value**—select the character used to separate the different levels of a multi-choice hierarchy. For example, you might import a field with following values: “Hot\\Really Hot\\Super Hot; Look at Later”. Using a semi-colon (;) as a multi-value delimiter, and a backslash (\) as a nested value delimiter, Relativity displays the choices
 - **File Column Headers**—displays the load file's column headers. Relativity automatically updates this section of the Load File tab when you select the file encoding. Note the following details about file column headers:
 - After you select an encoding, this section displays the fields in the load file. The column headers in the file display as vertical list. The fields display in alphanumeric order. The numeric value in parentheses indicates the position of the field within the file.
2. Click **Next** to advance to the Map Fields layout, which contains a list of Relativity fields from their destination RDO as well as attributes that the source provider pulled back.

5.5.3 Map fields

Map the attributes or fields so that Integration Points imports the targeted data into specific Relativity fields.

1. In the **Map Fields** wizard, you have the following options for mapping fields:

- Click the **Map All Fields** button to automatically map all Source fields with matching Destination field names, except single/multiple object fields.
- Use the Shift+click and Ctrl+click method to select multiple fields at a time.
- Use the single and double arrow buttons or double-click a field to move the selected fields between columns.
- If you have Destination Fields that are mapped to fields in the Field Catalog, Relativity tries to find name matches between these Catalog Fields, as well.
- The field names in the Destination columns include the type of each field listed.

When mapping fields, here are some issues to note:

- If the WebAPIPath instance setting in the kCura.IntegrationPoints section is not configured correctly after upgrade or installation, the Source field list is empty because it cannot return any attributes, and you are not able to map fields.
- When the load file data is being imported to Entity RDO, then **Full Name**, **First Name** and **Last Name** fields in the destination workspace must be mapped.

2. Complete the following import Settings on the **Map Fields** layout:

- **Overwrite**—determines how the system overwrites records once you promote data to the review workspace. This field provides the following choices:
 - **Append Only**—promote only new records into the review workspace.
 - **Overlay Only**—update existing records only in the review workspace. Any documents with the same workspace identifier are overlaid. This field acts as a link indicating to Relativity where to import the data. When you select this or Append/Overlay, you must complete the Multi-Select Field Overlay Behavior field described below.
 - **Append/Overlay**—adds new records to the review workspace and overlays data on existing records. When you select this or Overlay Only, you must complete the Multi-Select Field Overlay Behavior field described below. You are able to create folders or re-folder documents when you select Append/Overlay.
- **Multi-Select Field Overlay Behavior**—determines how the system will overlay records when you push documents to the review workspace. This field is only available if you've selected either Overlay Only or Append/Overlay above. This field provides the following choices:
 - **Merge Values**—merges all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Replace Values**—replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Use Field Settings**—merges or replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace according to the overlay behavior settings in the environment.
- **Copy Native Files**—this Yes/No field is only visible when you select the Documents RDO, and lets you indicate whether Integration Points should import any native files in the sync.
 - **Native File Path**—this field appears if you select Yes to import the native files. From the drop-down menu, select the source provider attribute containing the file path links to the natives that you want to import.
- **Use Folder Path Information**—use a metadata field to build the folder structure for the documents that you promote to the review workspace.
 - Select **Yes** to use a metadata field to build the folder structure for the documents that you promote to the review workspace. Selecting Yes makes the Folder Path Information field required below.
 - Select **No** if you do not want to build a folder structure based on metadata. In this case, Relativity loads all documents directly into the folder indicated by the promote destination, and you create no new folders in the destination workspace.
 - You have the option of creating folders or re-folding documents when you select Append/Overlay for the Overwrite field.
 - You have the option of re-folding documents for the Overwrite field through the Move Existing Documents field below.
- **Folder Path Information**—specify a metadata field to build the folder structure for the documents that you promote to the review workspace. For the purposes of ECA and Investigation, select the **Processing Folder Path** option.

- **Move Existing Documents**—re-folder documents that were previously imported into the destination workspace, but were only placed in the root case folder and not to any subfolders. This field is useful for situations in which you want to add new data to the destination workspace while overlaying existing data.
 - Select **Yes** to move existing documents into the folders provided in the previous **Folder Path Information** field. For example, you previously imported custodian Sally Smith's files into the destination workspace's root folder. Now, in addition to placing the documents from the saved search specified in this integration point in their subfolder, you also want to move those previously migrated documents into Sally Smith's subfolder, so you would select Yes.
 - Select **No** if you do not want to re-folder existing documents.
- **Extracted Text**—select the destination field that is mapped to a path to Extracted Text files. The content of these files will be read into the selected field. Note that only Long Text destination fields that are mapped will show up as options in the Extracted Text drop-down. You can select an encoding type for the extracted text files as well.
- **Cell contains file location**—select this option if your extracted text is in document-level text files, and your load file contains a path to those text files.
- **Encoding for undetectable files**—select an encoding for the text file.
- **Entity Manager Contains Link**—this Yes/No field is visible for all import sources when the Entity RDO is selected as the destination of the imported data. Some import sources populate the manager field with a link to the manager's profile on their internal system. Set this field to **No** if the Document Load File source is selected.

3. Click **Save** to save the Integration Point.

Once you save the Integration Point, you can run the import job. For more information, see [Manually running the import job on page 47](#).

5.6 Importing an image load file

Note: Before creating an integration point to import a load file, you must first place the load data in the \\Fileshare\\StructuredData folder. Otherwise, you will not be able to select that data for the Import Source field.

5.6.1 Setup

To create an integration point for importing an image load file, perform the following steps:

1. In the **Setup** layout, complete the following fields:

General:

- **Name**—the name of your integration for reference purposes
- **Type**—select **Import** to designate the job as a data import. Selecting Import makes all of the possible import sources available for selection in the Source field below.
- **Source**—select **Load File** here, since you want to import a load file into a workspace. On the Connect to Source layout, you'll have the option of specifying whether you're importing a document, image, or production load file.
- **Destination**—by default, this is set to **Relativity** and is uneditable when you select Import as the type, since you've already designated that you want to import into a Relativity workspace. You'll select the specific workspace on a subsequent layout.
- **Transferred Object**—select the specific Relativity Dynamic Object to which you want to import the data. Since you're importing the document object, select **Document** here.
- **Profile**—complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you've already created, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).

Advanced:

- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.

- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity doesn't log these item level errors.
 - Regardless of your selection, job-level errors are always recorded in Relativity.

Scheduling:

- **Enable Scheduler**—gives you the option of scheduling additional imports. Selecting Yes makes the following fields available:
 - **Frequency** —the interval at which Relativity syncs this integration point. Select one of the options below:
 - **Daily**—select this option to sync once every day.
 - **Weekly**—select this option to sync on a weekly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # week(s)** field for how often you want it to occur weekly.
 - **Send On**—specify on which day of the week (Monday through Sunday) the sync will take place by selecting any of the days of the week listed.
 - **Monthly**—select this option to sync on a monthly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # month(s)** field for how often you want it to occur monthly.
 - **Send On**—select the **Day # of the month** that you want this integration point to sync.
 - **Start Date**—the date that you want Integration Points to start syncing the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop syncing the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point syncs. This time is local to your PC, not to the server.
 - **Time Zone**—select the appropriate time zone.

2. Click **Next** to advance to the Source Information layout.

5.6.2 Source information

Continue create your import integration point by connecting adding the source information. Follow the steps below.

1. In the **Source Information** layout, complete the following fields.

Create Integration Point

Cancel ⓘ

Setup 1 Source Information 2

← Back Save Preview Options ▾

Load File Settings

Import Type: Image Load File ▾

Workspace Destination Folder: ClarityTest ▾

Import Source: DataTransfer\Import\ClarityTest\2017-03-17_16-35-14UTC\Error_Files\Do ▾

Start Line: 0

Import Settings

Numbering: ☒ Use load file page IDs ☐ Auto-number pages

Import Mode: Append Only ▾

Copy Files to Document Repository: ☒ Yes ☐ No

File Repository: \\files\T001\Files\ ▾ Default

Load Extracted Text: ☐ Yes ☒ No

Load File Settings:

- **Import Type**—select the type of load file you'd like to import to the workspace. Select **Image Load File** from the drop-down list.
- **Workspace Destination Folder**—select the specific folder within the destination workspace in which you want to place the documents you're importing. The folder tree you see when you click this drop-down menu is identical to the folder structure in the destination workspace.
- **Import Source**—click the down arrow and select a load file from the workspace's DataTransfer import location in the fileshare.
 - These locations are hard-coded into Relativity and cannot be changed. You cannot load or export data to a different location than is listed here.
 - For reference purposes, the folder(s) displayed in the Import Source field actually reside in the following generic path: \\Fileshare\StructuredData. Accordingly, when an admin adds data to the Import folder inside the DataTransfer folder inside the folder displaying the workspace's artifact ID, that data then becomes available for selection in the Import Source field.
- **Start Line**—select the line number in the load file where you want the import process to begin. The default value is 1, which results in loading the entire file.

Import Settings:

The following fields are only available if you selected Image or Production Load File for the Import Type field above.

- **Numbering**—determines the numbering scheme of the images you're importing.
 - **Use load file page IDs**—select this to use the default setting to number the images, which is the control number.
 - **Auto-number pages**—select this option if page IDs in the production or image load file are not unique. For example, you might import a set of TIFFs that share a page identifier for each record.

The page identifiers are shared per document and are not unique. The Auto-number pages option appends the 01, .02, and so on to the page-level identifier, creating a unique number per page. Auto-numbering pages is useful if you are importing productions or image load files that use document-level numbering without page numbers, and include documents that contain multiple pages.

- **Import Mode**

- **Append Only**—select this to load only new records. Select this option to import the extracted text and natives from a .dat file.
- **Overlay Only**—select this to update existing records only. When you select this, the required Overlay Identifier field appears below. This field acts as a link indicating to Relativity where to import the data. Select this option when overlaying production images onto the existing documents.
- **Append/Overlay**—select this to add new records and overlay data on existing records.
- **Overlay Identifier**—select a field that stores overlaid document-level Bates information on the document. This is only available if you selected Overlay Only for the import mode. The fields in the drop-down menu are fixed-length fields with a manually-applied SQL index. Note that this is NOT the same as adding the field to the full-text index. Contact your SQL database administrator to apply an index to a field.
- **Copy Files to Document Repository**—determines whether Relativity copies files from the location in the image load file field to the workspace's default document repository.
 - **Yes**—copies files to the workspace's default document repository automatically.
 - **No**—select this if the native files already reside in a location that Relativity can access.
- **File Repository**—select the file repository to which you want to copy the files in the image load file. This field is only visible if you selected Yes for the Copy Files to Document Repository field above. Click **Default** to switch this value to the default file repository used by the workspace.
- **Load Extracted Text** - determines whether or not Relativity will load new text for Production documents that may be revised based on redactions.
 - The text files must have .txt extensions, be stored in the same directory as the TIFF files, and be named in the same as the TIFF files.
 - This field is only available for image load files.
 - When you select this, the required Encoding for undetectable files field appears below.
- **Encoding for undetectable files**—select an encoding for the new text file that Relativity loads, per your enabling of the Load Extracted Text field above.

2. Click **Save** to save the Integration Point.

Once you save the Integration Point, you can run the import job. For more information, see [Manually running the import job on page 47](#).


5.7 Importing a production load file

Note: Before creating an integration point to import a load file, you must first place the load data in the \\Fileshare\\StructuredData folder. Otherwise, you will not be able to select that data for the Import Source field.

5.7.1 Setup

To create an integration point specifically for importing a production load file, follow the steps below.

1. In the **Setup** layout, complete the following fields:

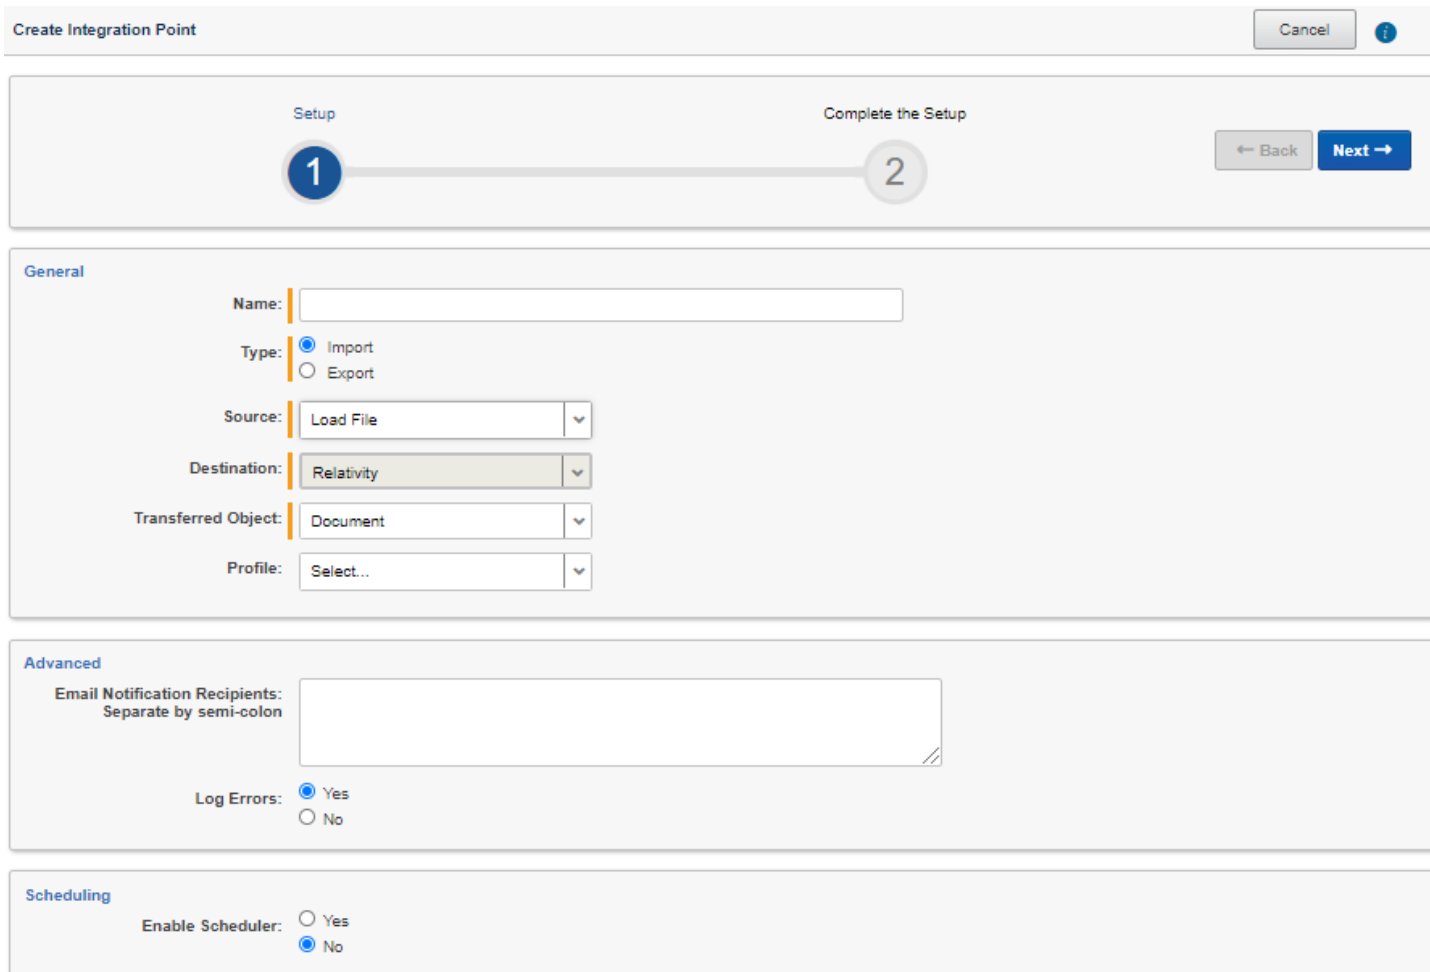

Create Integration Point [Cancel] [i]

Setup Complete the Setup

1 2

← Back Next →

General

Name:

Type: ☒ Import ☐ Export

Source: ▼

Destination: ▼

Transferred Object: ▼

Profile: ▼

Advanced

Email Notification Recipients:
Separate by semi-colon

Log Errors: ☒ Yes ☐ No

Scheduling

Enable Scheduler: ☐ Yes ☒ No

General:

- **Name**—the name of your integration for reference purposes
- **Type**—select **Import** to designate the job as a data import. Selecting Import makes all of the possible import sources available for selection in the Source field below.
- **Source**—select **Load File** here, since you want to import a load file into a workspace. On the Connect to Source layout, you'll have the option of specifying whether you're importing a document, image, or production load file.
- **Destination**—by default, this is set to **Relativity** and is uneditable when you select Import as the type, since you've already designated that you want to import into a Relativity workspace. You'll select the specific workspace on a subsequent layout.
- **Transferred Object**—select the specific Relativity Dynamic Object to which you want to import the data. Since you're importing the document object, select **Document** here.
- **Profile**—complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you've already created, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).

Advanced:

- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity doesn't log these item level errors.
 - Regardless of your selection, job-level errors are always recorded in Relativity.

Scheduling:

- **Enable Scheduler**—gives you the option of scheduling additional imports. Selecting Yes makes the following fields available:
 - **Frequency**—the interval at which Relativity syncs this integration point. Select one of the options below:
 - **Daily**—select this option to sync once every day.
 - **Weekly**—select this option to sync on a weekly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # week(s)** field for how often you want it to occur weekly.
 - **Send On**—specify on which day of the week (Monday through Sunday) the sync will take place by selecting any of the days of the week listed.
 - **Monthly**—select this option to sync on a monthly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # month(s)** field for how often you want it to occur monthly.
 - **Send On**—select the **Day # of the month** that you want this integration point to sync.
 - **Start Date**—the date that you want Integration Points to start syncing the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop syncing the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point syncs. This time is local to your PC, not to the server.
 - **Time Zone**—select the appropriate time zone.

2. Click **Next** to advance to the Connect to Source layout.

5.7.2 Source information

Continue create your import integration point by connecting adding the source information. Follow the steps below.

1. In the **Source Information** layout complete the following fields.

Create Integration Point

Cancel

Setup Source Information

1 2

← Back Save Preview Options

Load File Settings

Import Type:

Workspace Destination Folder:

Import Source:

Start Line:

Import Settings

Numbering: ☒ Use load file page IDs ☐ Auto-number pages

Import Mode:

Copy Files to Document Repository: ☒ Yes ☐ No

File Repository:

Production:

Load File Settings:

- **Import Type**—select the type of load file you'd like to import to the workspace. Select **Production Load File** from the drop-down list.
- **Workspace Destination Folder**—select the specific folder within the destination workspace in which you want to place the documents you are importing. The folder tree you see when you click this drop-down menu is identical to the folder structure in the destination workspace.
- **Import Source**—click the down arrow and select a load file from the workspace's DataTransfer import location in the fileshare.
 - These locations are hard-coded into Relativity and cannot be changed. You cannot load or export data to a different location than is listed here.
 - For reference purposes, the folder(s) displayed in the Import Source field actually reside in the following generic path: \\Fileshare\\StructuredData. Accordingly, when an admin adds data to the Import folder inside the DataTransfer folder inside the folder displaying the workspace's artifact ID, that data then becomes available for selection in the Import Source field.
- **Start Line**—select the line number in the load file where you want the import process to begin. The default value is 1, which results in loading the entire file.

Import Settings:

The following fields are only available if you selected Image or Production Load File for the Import Type field above.

- **Numbering**—determines the numbering scheme of the production you're importing.
 - **Use load file page IDs**—select this to use the default setting to number the production, which is the control number.
 - **Auto-number pages**—select this option if page IDs in the production or image load file are not unique. For example, you might import a set of TIFFs that share a page identifier for each record. The page identifiers are shared per document and are not unique. The Auto-number pages option appends the 01, .02, and so on to the page-level identifier, creating a unique number per page.

Auto-numbering pages is useful if you are importing productions or image load files that use document-level numbering without page numbers, and include documents that contain multiple pages.

- **Import Mode**

- **Append Only**—select this to load only new records. Select this option to import the extracted text and natives from a .dat file.
- **Overlay Only**—select this to update existing records only. When you select this, the required Overlay Identifier field appears below This field acts as a link indicating to Relativity where to import the data. Select this option when overlaying production images onto the existing documents.
- **Append/Overlay**—select this to add new records and overlay data on existing records.
- **Overlay Identifier**—if you selected Overlay Only for the import mode, select a field that stores overlaid document-level Bates information on the document.
The fields in the drop-down menu are fixed-length fields with a manually-applied SQL index. Note that this is NOT the same as adding the field to the full-text index. Contact your SQL database administrator to apply an index to a field.
- **Copy Files to Document Repository**—determines whether or not Relativity will copy files from the location in the image load file field to a selected document repository.
 - **Yes**—copies files to the workspace's default document repository automatically.
 - **No**—select this if the native files already reside in their final location, which is accessible by Relativity.
- **Production**—select a Relativity production that you want to upload images to. Only new production sets without a production source appear in this list.

2. Click **Save** to save the Integration Point.

Once you save the Integration Point, you can run the import job. For more information, see [Manually running the import job on page 47](#).

5.8 Importing from Microsoft Entra ID

Note: Microsoft has renamed Azure Active Directory (Azure AD) to Microsoft Entra ID. This site has been updated to reflect the name change, where applicable. Refer to [Microsoft documentation](#) for more information.

The Integration Points Microsoft Entra ID Provider is a separate and standalone application that can be downloaded from the Relativity Community. For more information, see the Integration Points guide.

You will need the following to complete the setup in Integration Points:

- Application ID from Microsoft Azure
- Application Secret Value from Microsoft Azure
- Domain address of Microsoft Azure instance
- Any filtering requirements that will be used to filter imported data
- Field Mappings to map fields between Relativity and Microsoft Entra ID.

5.8.1 Setup

To create an integration point for importing from Microsoft Entra ID:

1. Complete the following fields in the Setup layout:

General:

- **Name**—the name of your integration for reference purposes.

Note: Name the application in Integration Points the same as you did in Microsoft Entra ID for easy location of application when needing to make updates.

- **Type**—select Import to designate the job as a data import. Selecting Import makes all the possible import sources available for selection in the Source field below.
- **Source**—all possible third-party systems that you can import data from. Select **Microsoft Entra ID**, formerly known as Azure AD.
- **Destination**—by default, this is set to Relativity and is not editable when you select Import as the type, since you've already designated that you want to import into a Relativity workspace. You'll select the specific workspace on a subsequent layout.
- **Transferred Object**—the Relativity Dynamic Object (RDO) to which you want to import the data. Select the Entity object.
- **Profile**—complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you've already created, select it from the drop-down list.

Advanced:

- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity doesn't log these item level errors.
 - Regardless of your selection, job-level errors are always recorded in Relativity.

Scheduling:

- **Enable Scheduler**—gives you the option of scheduling additional imports. Selecting Yes makes the following fields available:
 - **Frequency**—the interval at which Relativity syncs this integration point. Select one of the options below:
 - **Daily**—select this option to sync once every day.
 - **Weekly**—select this option to sync on a weekly basis. Then, enter data in the following fields:
 - **Reoccur**—enter a numeric value in the **Every # week(s)** field for how often you want it to occur weekly.
 - **Send On**—specify on which day of the week (Monday through Sunday) the sync will take place by selecting any of the days of the week listed.
 - **Monthly**—select this option to sync on a monthly basis. Then, enter data in the following fields:

- **Reoccur**—enter a numeric value in the **Every # month(s)** field for how often you want it to occur monthly.
- **Send On**—select the **Day # of the month** that you want this integration point to sync.
- **Start Date**—the date that you want Integration Points to start syncing the data.
- **End Date**—(Optional) the date that you want Integration Points to stop syncing the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
- **Scheduled Time**—the time at which this integration point syncs. This time is local to your PC, not to the server.
- **Time Zone**—select the appropriate time zone.

2. Click **Next** to continue to the Connect to Source layout.

5.8.2 Connect to source

Continue to create your import integration point by connecting Relativity to your Microsoft Entra ID data source. You can select to import from your commercial or government Microsoft Entra ID profile. Follow the steps below.

1. Complete the following fields in the Connect to Source layout:

- **Version**—select either a Commercial or Government Microsoft Entra ID version to import from.
- **Application ID**—the ID of the application was created in the Azure Portal. For more information, see the Integration Points guide.
- **Password**—the associated Application Secret Value, not the Secret ID, is the password for the application that was created in the Azure Portal. For more information, see the Integration Points guide.
- **Directory ID**—the Microsoft Entra ID tenant domain the Azure application resides in.
- **Filter By**—you can limit the records imported by limiting import to specific users or groups.
- **Filter**—Optional. Limits the users or groups imported from Microsoft Entra ID.
 - Enter only the filter condition using Microsoft Graph query syntax.
 - Do not include the *\$filter* query parameter. Including *\$filter=* in the field may cause errors.
 - Relativity automatically applies *\$filter* when submitting the request to Microsoft Entra ID.
 - Examples:
 - department eq 'Engineering'
 - userType eq 'Member'
 - For more information on using Graph query syntax, see Microsoft's Graph REST API documentation.
 - The Microsoft Entra ID provider supports both standard and advanced Microsoft Graph filters. For more information on filter syntax, supported operators, and query requirements, see Microsoft's Use the \$filter query parameter.
- **MS-Graph Version**—determines which version of the Graph API Integration Points will be used when interfacing with Azure AD. Defaults to version 1.0 of the Graph API if left blank. Another available option is Beta.

2. Click **Next** to continue to the Map Fields layout.

Note: A warning message appears at the top of page if information is not valid, and you will not be able to continue to the next step until the error is resolved.

5.8.2.1 Microsoft Graph advanced filters

The Microsoft Entra ID provider supports Microsoft Graph advanced filters. You can use advanced filters to further refine the users or groups returned from Microsoft Entra ID during an import. Filter syntax, supported operators, and query requirements vary by object type and property. For more information, see [Microsoft Graph filter query parameter documentation](#).

5.8.3 Map fields

Map the attributes or fields so that Integration Points imports the targeted data into specific Relativity fields.

1. In the **Map Fields** wizard, you have the following options for mapping fields:
 - Click the **Map All Fields** button to automatically map all Source fields with matching Destination field names, except single/multiple object fields.
 - Use the Shift+click and Ctrl+click method to select multiple fields at a time.
 - Use the single and double arrow buttons or double-click a field to move the selected fields between columns.
 - If you have Destination Fields that are mapped to fields in the Field Catalog, Relativity tries to find name matches between these Catalog Fields, as well.
 - The field names in the Destination columns include the type of each field listed.

When mapping fields, here are some issues to note:

- If the WebAPIPath instance setting in kCura.IntegrationPoints is not configured correctly after upgrade or installation, the Source Fields list will be empty because it cannot return any attributes. As a result, you cannot map fields.
- When importing the Entity object:
 - You need to map the First Name and Last Name fields. In case the Full Name field is not being mapped, those two fields are combined for the Full Name value, which is then written to the Entity object.
 - You can link the imported entity to a manager if the manager also exists in the entity database. To proceed with linking them, you must map the Manager field on the Field Mappings page. Pre-

viously this was done via the Entity Manager Contains Link option, which has been deprecated.

2. Complete the following import Settings on the **Map Fields** layout:

- **Overwrite**—determines how the system overwrites records once you promote data to the review workspace. This field provides the following choices:
 - **Append Only**—promote only new records into the review workspace.
 - **Overlay Only**—update existing records only in the review workspace. Any documents with the same workspace identifier are overlaid. This field acts as a link indicating to Relativity where to import the data. When you select this or Append/Overlay, you must complete the Multi-Select Field Overlay Behavior field described below.
 - **Append/Overlay**—adds new records to the review workspace and overlays data on existing records. When you select this or Overlay Only, you must complete the Multi-Select Field Overlay Behavior field described below.
- **Multi-Select Field Overlay Behavior**—determines how the system overlays records when you promote documents to the review workspace. This field is only available if you have selected either Overlay Only or Append/Overlay above. This field provides the following choices:
 - **Merge Values**—merges all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace. These merge regardless of the overlay behavior settings in the environment.
 - **Replace Values**—replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace. These merge regardless of the overlay behavior settings in the environment.
 - **Use Field Settings**—merges or replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace according to the overlay behavior settings in the environment.

- **Unique Identifier**—this option is only available when the Overwrite mode is set to Overlay Only. Enter a unique value that no other item in the workspace contains. For example, use the GUID or distinguishedName attribute. If the value is not unique in the workspace, it may lead to unintentional overwriting of existing data.

3. Click **Save** to save the Integration Point.


Once all of the settings have been entered the Integration Points job will run according to the schedule that was set. If you would like to run the job ahead of that time. For more information, see the Integration Points guide.

5.8.4 Reporting on Microsoft Entra ID imports

Reporting on Microsoft Entra ID imports can be done in Integration Points. For more information, see the Integration Points guide.

5.9 Manually running the import job

Once you have created an Integration Point, you can manually run an integration point by selecting the Integration Point, and clicking **Run** from the console. This lets you run an integration point instantly, as opposed to scheduling an integration point to run.

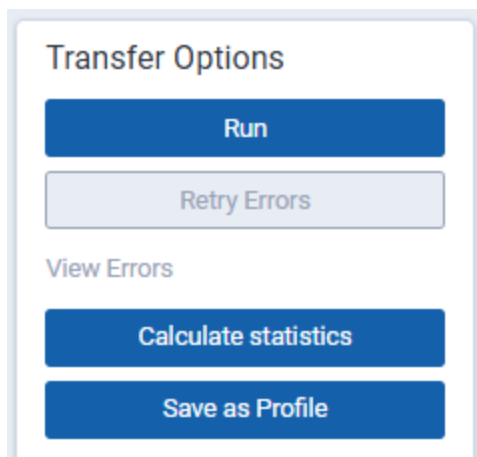

Click **OK** on the run confirmation message.

The Run button turns to red and gives you the option of stopping the job you just kicked off, as long as that job has a status of Pending or Processing.

If necessary, monitor the progress of the promote job by viewing the **Status** field in the **Status** view at the bottom of the layout. You will see any of the following status values:

- **Pending**—the job has yet to be picked up by an agent.
- **Validation**—an agent is validating the job to make sure it has the required settings, such as access to the source and destination objects (saved searches, workspaces, etc.). If validation fails, the status changes to "Validation failed," and Relativity logs an error. If the validation succeeds, the job moves on to a status of "Processing."
- **Validation failed**—the job validation has failed, resulting in an error, the details of which are saved in the Job History Errors tab.
- **Processing**—the agent has picked up the job and is in the process of completing it.
- **Completed**—the job is complete, and no errors occurred.
- **Completed with errors**—the job is complete and errors have occurred.
- **Error - job failed**—a job-level error occurred and the job did not complete because it failed.

- **Stopping**—you clicked the Stop button, and the stop job has yet to be picked up by an agent.
- **Stopped**—the job has been stopped.

You can calculate the number of documents, as well as images and natives if applicable, to be transferred in the scope of a particular Integration Point.

1. Navigate to the **General** tab on the Integration Points details page for the integration point job.

The screenshot shows the 'Integration Points' details page for a specific job. The 'General' tab is selected. The page includes a top navigation bar with tabs like 'Integration Points', 'Job History', and 'Destination Workspaces'. Below this, there are buttons for 'Edit', 'Delete', 'Back', 'Edit Permissions', and 'View Audit'. The main content area is divided into two sections: 'General' and 'Scheduling'. The 'General' section contains fields for 'Name', 'Stats calculation on demand', 'Log Errors' (Yes), 'Overwrite' (Append/Overlay), 'Has Errors' (No), 'Export Type' (Workspace), 'Email Notification Recipients', 'Source Details' (Saved Search: Extracted Text Only), 'Source Workspace' (A7 source), 'Total of Documents' (Press 'Calculate statistics' button), 'Source Relativity Instance' (This instance(emttest)), 'Create Saved Search' (No), 'Transferred Object' (Document), 'Destination Workspace' (A7 destination), 'Destination Folder' (A7 destination), 'Multi Select Overlay' (Use Field Settings), 'Use Folder Path Info' (No), and 'Move Existing Docs' (No). On the right, the 'Transfer Options' panel has buttons for 'Run', 'Retry Errors', 'Calculate statistics', and 'Save as Profile'. At the bottom, there is a table with columns for Job ID, Start Time (UTC), Artifact ID, Name, Job Type, Job Status, and Destination Worksp... with filters and pagination controls.

Note: Before the first calculation for this integration point, you will see the "Press 'Calculate statistics' button" message in the Total of Documents field.

Log Errors Yes

Has Errors No


Email Notification Recipients

Total of Documents Press 'Calculate statistics' button

Create Saved Search No

Tag Documents Yes (Source and Destination Workspaces)

2. Click the **Calculate statistics** button under Transfer Options in the right-hand panel.

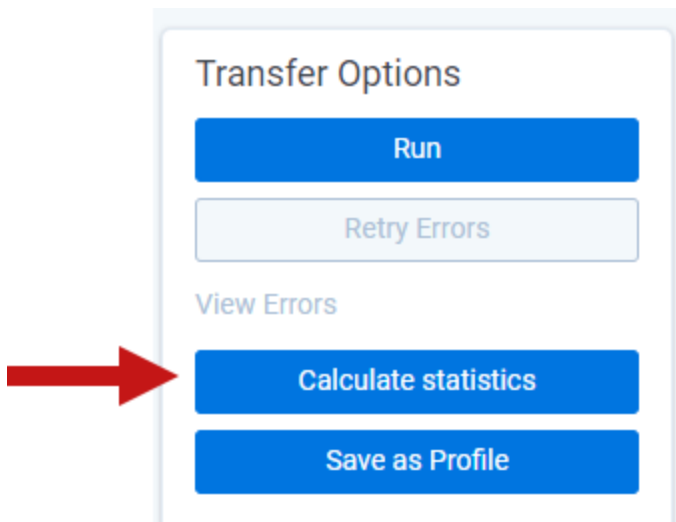

- A message appears confirming that this action launches the calculation of the Saved Search or Production content, depending on the integration point selected.
- The calculation runs in the background. You can continue using other Transfer Options or leave the page and return for results later.
- If your job includes more than 500,000 documents, a warning banner appears after the calculation runs.
- The same warning appears if your job includes more than 25 GB of extracted text across mapped fields. Split the job into smaller batches before running to reduce job time.
- Calculation results appear on the details page and depend on Integration Point content.
- The total number of documents with a date and time mark of the last calculation will display.
- Depending on the transferred content, the total number and size of images or natives may also display.

Total of Documents 25


Calculated on: 12/19/2022 16:18 UTC

Total of Natives 25 (2.56 MB)

5.10 Disabling a scheduled Integration Point job

To disable a scheduled integration point , simply turn off the scheduler.


1. From the Integration Points landing page, click the **Integration Point Name** that you wish to disable.
2. Click **Edit**.
3. In the Scheduling section, select **No** for Enable Scheduler. The integration point is no longer scheduled to run.



5.11 Scheduler date format considerations


The integration points scheduler accepts U.S. and non-U.S. date formats based off the default language setting in your browser settings.

For example, if the language setting is English (Australian), the date format would be Day/Month/Year instead of Month/Day/Year.

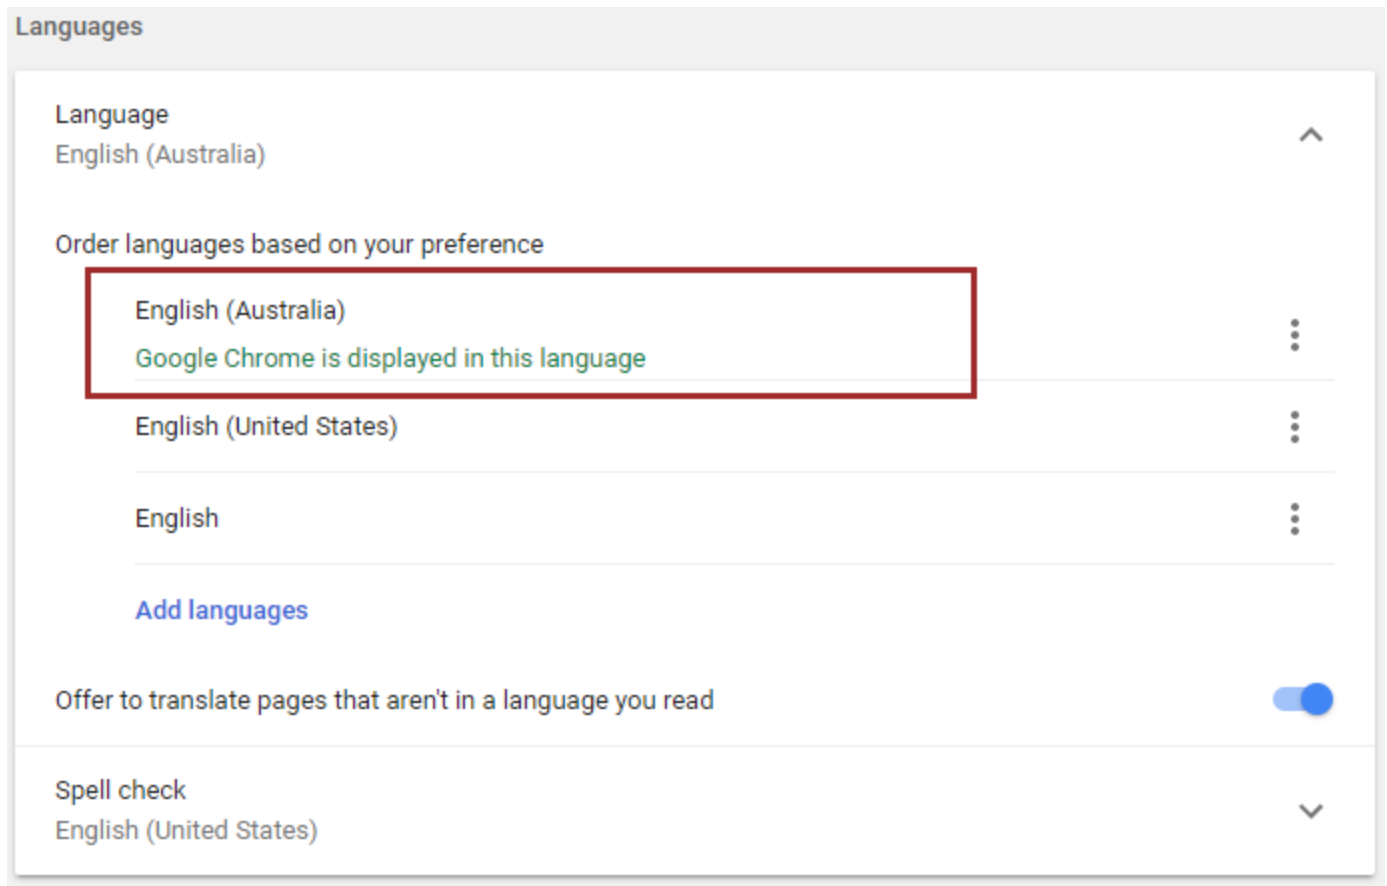

The screenshot shows the 'Languages' settings in a web browser. At the top, 'Language' is set to 'English (Australia)'. Below this, a section titled 'Order languages based on your preference' contains a list of languages. 'English (Australia)' is at the top, highlighted with a red box, and has a green status message: 'Google Chrome is displayed in this language'. Below it are 'English (United States)' and 'English'. Each language has a three-dot menu icon to its right. At the bottom of the list is a link that says 'Add languages'. Below the list, there is a toggle switch for 'Offer to translate pages that aren't in a language you read', which is currently turned on. At the very bottom, there is a 'Spell check' section set to 'English (United States)'.

Relativity properly displays the date for the Start and End Date fields when setting up Scheduling.

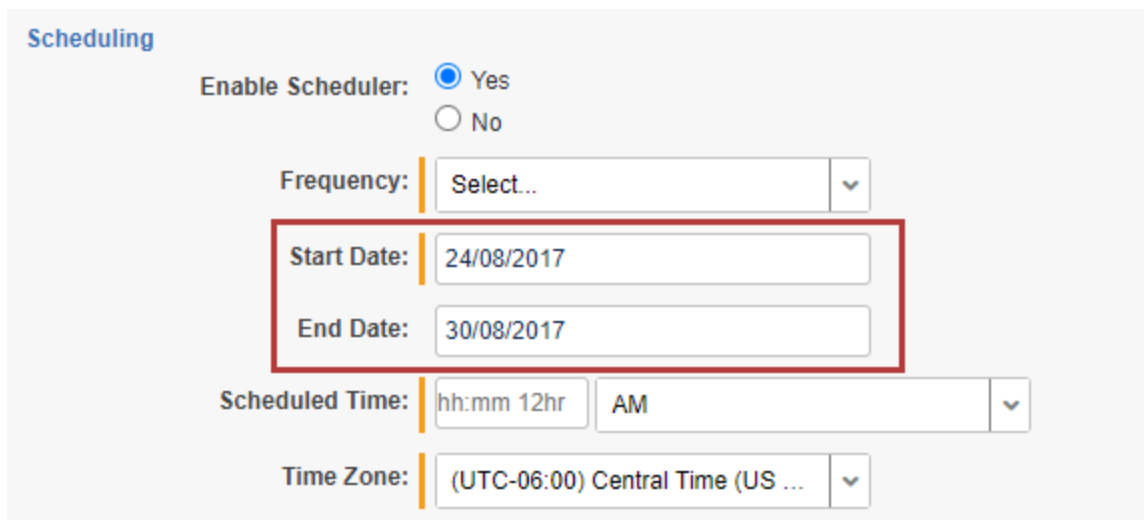

The screenshot shows the 'Scheduling' configuration form. It starts with 'Enable Scheduler:' with radio buttons for 'Yes' (selected) and 'No'. Below this is a 'Frequency:' dropdown menu currently showing 'Select...'. A red box highlights the 'Start Date:' field with the value '24/08/2017' and the 'End Date:' field with the value '30/08/2017'. Below the dates is the 'Scheduled Time:' section, which includes a time input field showing 'hh:mm 12hr' and an AM/PM dropdown set to 'AM'. At the bottom is the 'Time Zone:' dropdown menu, currently set to '(UTC-06:00) Central Time (US ...)'. The date format used (Day/Month/Year) matches the browser settings shown in the previous image.

This date format appears in Relativity wherever a date is displayed, such as on the saved Integration Point Details layout and the Date Last Modified field on the Document list.

5.12 Automatically stopping a scheduled job that repeatedly fails

In some cases, a scheduled job may fail each time it is executed, and it may take some time before you become aware of the failed attempts. To mitigate this situation, you can configure an instance setting to specify the maximum number of consecutive failed attempts encountered before the job is automatically stopped. For example, you may want to stop the scheduled job after four consecutive failed attempts at running.

1. Navigate to the **Instance Settings** page.
2. Create a new instance setting with the following settings.
 - **Name**—enter **MaxFailedScheduledJobsCount**.
 - **Section**—enter **kcura.IntegrationPoints**.
 - **Value Type**—select **Integer 32-bit**.
 - **Value**—enter the number of consecutive failed attempts to be executed before the scheduled job is stopped.

			MaxFailedScheduledJobsCount	4		kcura.IntegrationPoints	No
---	---	---	-----------------------------	---	--	-------------------------	----

The integration point's Scheduling tab displays the failed jobs with a Job Type of "Scheduled Run," Job Status of "Error - job failed," Items Transferred of "0," and Total Items based on the number of items in that job. The system will attempt one more run after the configured maximum number of consecutive failed attempts before it stops the scheduled job. The Total Items column will be blank.

Status										
Job ID	Start Time (UTC)	Artifact ID	Name	Job Type	Job Status	Destination Worksp...	Items Transferred	Total Items	Items with Errors	System Created By
Filter	(All)	Filter	Filter	(All)	(All)	Filter	Filter	Filter	Filter	Filter
8	12/5/2022, 2:21 PM	1040715	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0		0	Service Account, Relativity
7	12/5/2022, 2:21 PM	1040697	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
6	12/5/2022, 2:20 PM	1040679	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
5	12/5/2022, 2:19 PM	1040661	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
1	12/5/2022, 2:19 PM	1040643	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity

The "Next Scheduled Runtime (UTC)" field on the Scheduling tab will be blank to let you know that the job is not scheduled to run again. You must correct the error(s) before it will run again as scheduled.

General	Scheduling
Enable Scheduler	Yes
Schedule Rule	
	Next Scheduled Runtime (UTC)
	Last Runtime (UTC) 12/5/2022 2:21 PM

The Job History page displays the system-generated error description explaining why the scheduled job was stopped.

Job History Error						
Name	Source Unique ID	Job History	Error	Error Status	Error Type	System Created On
Filter	Filter	Filter	Filter	(All) ▼	(All) ▼	(All)
90710540-d664-4e8d-		Automated Stop for...	Scheduled Job reached maximum number of consecutive fails and therefore was stopped by the system. The schedule won't be restored until Integration Point update.	New	Job	



6 Exporting data through Integration Points

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

Integration Points provides you with the ability to export data directly from your workspace. This includes exporting saved searches, case folders, and productions directly from your workspace, and scheduling future or recurrent export jobs.

Notes:

- Import/Export is the recommended application for load file imports and exports.
- When you export data to a load file through Integration Points, your files are saved to a \StructuredData folder on the fileshare. To access this file share, look at the AppID in the URL of your Relativity environment and locate the folder on the fileshare.

6.1 Exporting a folder to load file

To create an integration point specifically for exporting a folder, perform the following steps:

1. Navigate to the **Integration Points** tab.
2. Click **New Integration Point**.

3. Complete the following fields in the **Setup** category of the Create Integration Point layout:

Create Integration Point

Cancel

Setup

Complete the Setup

1

2

← Back

Next →

General

Name:

Doc Export

Type:

☐ Import

☒ Export

Source:

Relativity

▼

Destination:

Load File

▼

Transferred Object:

Document

▼

Profile:

Select...

▼

Include in ECA Promote List:

☐ Yes

☒ No

Advanced

Email Notification Recipients:
Separate by semi-colon

Log Errors:

☒ Yes

☐ No

Scheduling

Enable Scheduler:

☐ Yes

☒ No

- **Name**—the name of your integration for reference purposes.
- **Type**—select **Export** to designate this as an export job. Selecting this sets the Source field to be Relativity.
- **Source**—this is automatically set to **Relativity** since you are exporting data out of a Relativity workspace.
- **Destination**—select **Load File**.
- **Transferred Object**—select **Document**.
- **Profile**—use this to complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you previously created, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).
- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.

- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity does not log these item level errors.
 - Regardless of your selection, job-level errors are always recorded in Relativity.
- **Enable Scheduler**—gives you the option of scheduling additional exports. Selecting **Yes** makes the following fields available:
 - **Frequency**—the interval at which Relativity promotes data using this integration point.
 - **Daily**—select this option to promote data once every day.
 - **Weekly**—select this option to promote data on a weekly basis. You can specify how often in the **Reoccur** field, in which you will provide a number value in the **Every # week(s)** choice. You can then specify on which day of the week the data promotion will take place by checking any of the days of the week listed.
 - **Monthly**—select the day of the month that you want this integration point to promote data once every month.
 - **Reoccur**—enter the number of month(s) in which this integration point recurrently promotes data.
 - **Send On**
 - **Day __ the month**—select the day of the month that you want this integration point to promote data.
 - **The __ of the Month**—select this option for this integration point to promote data on the chosen day of every month. For example, "The **Second Friday** of the month."
 - **Start Date**—the date that you want Integration Points to start promoting the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop promoting the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point promotes date. This time is local to your PC, not to the server.

4. Click **Next** to advance to the Source Information layout.

5. Complete the following fields on the **Source Information** layout:

Create Integration Point Cancel i

Setup Source Information Destination Information

← Back Next →

Source Detail

Source:

Folder:

Views:

Start Export at Record:

Columns To Export

Source Fields:

- Alert
- Analytics Index
- Artifact ID
- Attachment Name
- Attorney Review Comments
- Batch
- Batch::Assigned To
- Batch::Batch Set
- Batch::Status
- Bates Beg
- Bates Beg Attach
- Bates End
- Bates End Attach
- Case Admin - Production Volume
- Case Admin Saved Searches
- Control Number Beg Attach
- Control Number End
- Control Number End Attach
- Conversation Family
- Conversation Index
- Data Load Date
- Data Load Volume
- Date Created
- Date Last Printed
- Date Received
- Date Sent
- Delivery Receipt

Selected Fields:

- Confidential Designation
- Control Number
- Custodian - Single Choice
- Date Last Modified
- Document Extension
- Email CC
- Email From
- Email Subject
- Email To
- Group Identifier
- Issue Designation
- Privilege Designation
- Responsive Designation
- Sort Date
- Title

Renamed Fields:

Rename


- **Source**—select **Folder** from the drop-down list. Specify that you want to select a folder, from which you want export the data in your load file. You will select this folder below from the folder structure in the Folder field. You will also need to select a View from the Views field.
- **Folder**—click on the down arrow and expand the folder structure, locate the folder from which you want to export the data, and select it. This field is only available if you selected Folder + Subfolders as the source above.

Note: When creating an integration point based on a profile, if you change the saved search, folder, or production set on the Setup layout, the fields listed in the Selected Fields window below are not updated to reflect the new source that you selected. If you're not using a profile to creating the integration point, these fields are updated to reflect the newly selected source.

- **Views**—click on the down arrow and select a view for the data that you want to export. This is only available if you selected Folder or Folder + Subfolders as the source above.
- **Start Export at Record**—select a record number that identifies the initial document for export. Integration Points exports the document with this record number and continues exporting documents with subsequent record numbers.
- **Source Fields | Selected Fields| Renamed Fields**—choose the fields that you want to export by moving them to the Selected Fields box. The box on the left displays all available source fields. The fields listed in the Selected Fields column are determined by what you select for the Source field above, as well

by the folder, production set, or saved search that you select. Only the fields in the Selected Fields box on the right will be exported when you run the integration point. If you wish to rename the fields in your load file before exporting them, you can do so through the Rename option described below. The fields whose names you change are displayed in the Renamed Fields column.

- **Rename**—gives you the option of renaming the fields in your load file before exporting them. When you click this button, you are presented with the following settings and buttons in the Rename Fields window:

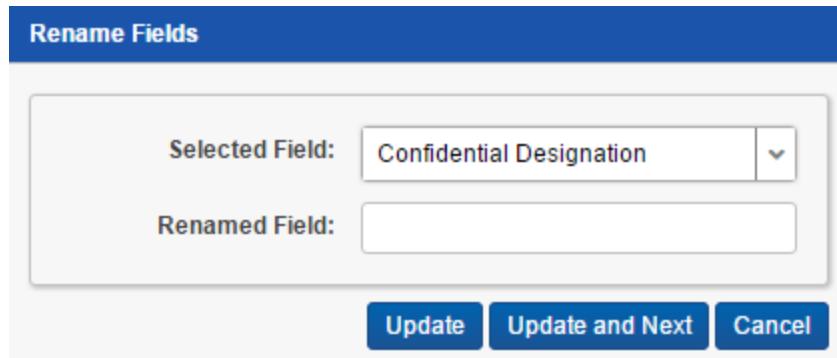

- **Selected Field**—displays the current name of the field that you selected from the Source Fields column. To change its name, use the Renamed Field below.
- **Renamed Field**—enter the new name for the Selected Field. This name will appear in the Renamed Fields column of the layout once you click the Update or Update and Next button below. If you do not change the original name of the selected field, then the Renamed Fields column contains an empty row for that field.
- **Update** button—click this button to update the selected field to the name you entered in the Renamed Field setting. When you do this, the renamed field appears in the Renamed Field column.
- **Update and Next** button—click this button to update the selected field to the name you entered in the Renamed Field setting and then move to the next field in the Selected Field column. When you do this, the renamed field appears in the Renamed Field column and the next field appears in the Selected Field setting.
- **Cancel** button—click this to exit the Rename Fields window without applying any changes to current field names.

6. Click **Next** to advance to the Destination Information layout.

7. Complete the following fields on the **Destination Information** layout:

Create Integration Point [Cancel] ⓘ

Setup Source Information **Destination Information** 3 [Back] [Save]

Export Detail ⓘ

Export Type: ☐ Load File ☒ Images ☒ Natives ☒ Text Fields As Files Overwrite Files: ☒

Destination Folder: .StructuredData\export_(TimeStamp) [v]

☒ Create Export Folder

Output Settings

LOAD FILE OPTIONS

Image File Format: [Select...] [v]
 Data File Format: [Relativity (.dat)] [v]
 Data File Encoding: [Unicode] [v]
 File Path: ☒ Relative ☐ Absolute ☐ User Prefix: []
 Include Native Files Path: ☒
 Export Multiple Choice Fields As Nested: ☐

FILE NAMING OPTIONS

Name Output Files After: [Identifier] [v]
 Append Original File Name: ☐

IMAGE

File Type: [Single page TIFF/JPEG] [v]
 Image Precedence: [Original Images] [v]
 Subdirectory Prefix: [IMG] [001]

NATIVE

Subdirectory Prefix: [NATIVE] [001]

TEXT

Text File Encoding: [Unicode] [v]
 Text Precedence: [Select...] [v]
 Subdirectory Prefix: [TEXT] [001]

Volume & Subdirectory Detail

VOLUME

Prefix: [VOL]
 Start Number: [1]
 Number Of Digits: [2]
 Max Size (MB): [4400]

SUBDIRECTORY

Start Number: [1]
 Number Of Digits: [3]
 Max Files: [500]

- **Load File Options**

- **Export Type**—this field reflects the type of export job you are running, which you specified on the Setup layout. By default, Load File is selected as the base configuration for your export job. You also have the option of enhancing the load file by selecting **Images**, **Natives**, and **Text Fields as Files**, depending on the makeup of your data. Selecting any of these options makes additional corresponding output settings available, which are described below.
 - The Text Fields as Files option determines the export of the extracted text or OCR. Select this option if you want to export files as individual document-level text files, with one file per document. Integration Points includes text as part of your load file if you deselect this option and if a long text field is included in the selected fields that you mapped in the Source Information layout.
- **Destination Folder**—specify the folder into which you want to export the data from the load file. This reads the Default File Repository and lets you select a subfolder of that location.

- **Create Export Folder**—check this box to create an export folder named after the existing Relativity Integration Point job and the timestamp in your export folder. This will prevent the overwriting of any previous Relativity Integration Point exports to your export folder. When you check this box, the value displayed in the Destination Folder field is updated to reflect the [JobName]_[Run-TimeStampUTC] information.
- **Image File Format**—select one of these formats for image-level load file:
 - Opticon
 - IPRO
 - IPRO (Full Text)
- **Data File Format**—select the format for the document-level load file you are exporting:
 - **Relativity (.dat)**—load file exports with the standard Concordance delimiters.
 - **HTML (.html)**—load file is in HTML and contains hyperlinks to launch any exported files.
 - **Comma-separated (.csv)**—load file exports as delimited text file that uses a comma to separate values.
 - **promote data**—load file exports with the custom delimiters that you select.
- **Data File Encoding**—select an encoding for the document-level load file from the drop-down box.
- **File Path**—controls how the export path for the files is referenced. Select one of the following options:
 - **Use absolute paths**—paths to exported files are represented as absolute paths. For example, C:\ Desktop\VOL001\NATIVE001\AS000001.msg
 - **Use relative paths**—paths to exported files are represented as relative paths. For example, .\VOL001\NATIVE001\AS000001.msg
 - **Use prefix**—a prefix is added to the relative path, such as a CD drive letter. For example, D:\VOL001\NATIVE001\AS000001.msg
- **Include Native Files Path**—check this box if you want to include the native file path in your data once you export it. Note that in the load file, for example a Relativity.dat file, there will be file path information added for every record you are exporting.
- **Export Multiple Choice Fields as Nested**—select this option to maintain the hierarchy of Relativity multiple-choice lists, when applicable. The nested value delimiter, a backslash, separates child choices.
- **Name Output Files After**—select one of the following naming convention for exported files:
 - **Identifier**—select this option to name the files after the identifier for your workspace.
 - **Begin production number**—select this option to name the files after the production number. (This number may be the Bates number for a production.) Relativity names files after the production number only if you select Produced Images as the Production Precedence below.
- **Append Original File Name**—select this option to append the original name of the file to the end of the exported file name.

- **Image**—the following fields are only available if you selected Images for the Export Type field above.
 - **File Type**—select one of these file types:
 - Single-page TIF/JPG
 - Multi-page TIF
 - PDF
 - **Production Precedence**—select one of the following groups of produced documents for export instead of the original images:
 - **Original Images**—exports only the original, non-produced images.
 - **Produced Images**—exports a produced version of the images. When you select this, the following fields become available:

IMAGE

File Type: Single page TIFF/JPEG

Production Precedence: Produced Images


Image Productions: November Production

Include Original Images If Not Produced: ☐

Subdirectory Prefix: IMG 001

- **Image Productions**—select the produced images that you want to act as the precedence.
 - **Include Original Images If Not Produced**—exports only the original images in the event that they have not been produced.
- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported images. By default, this is set to IMG.
- **Native**
 - **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported native files. By default, this is set to NATIVE. This field is only available if you selected Natives for the Export Type field above.
- **Text**—the following fields are only available if you selected text Fields As Files for the Export Type field above.
 - **Text File Encoding**—select the encoding for the document-level text files
 - **Text Precedence**—select and assign an order to long text fields that Relativity checks for text when performing an export. You must select one or more long text fields to use this functionality. Click the ellipsis to display the Pick Text Precedence pop-up. To move fields between columns, highlight them and click the Right or Left single or double arrows. Use the Up and Down arrows to

order the precedence of the fields.

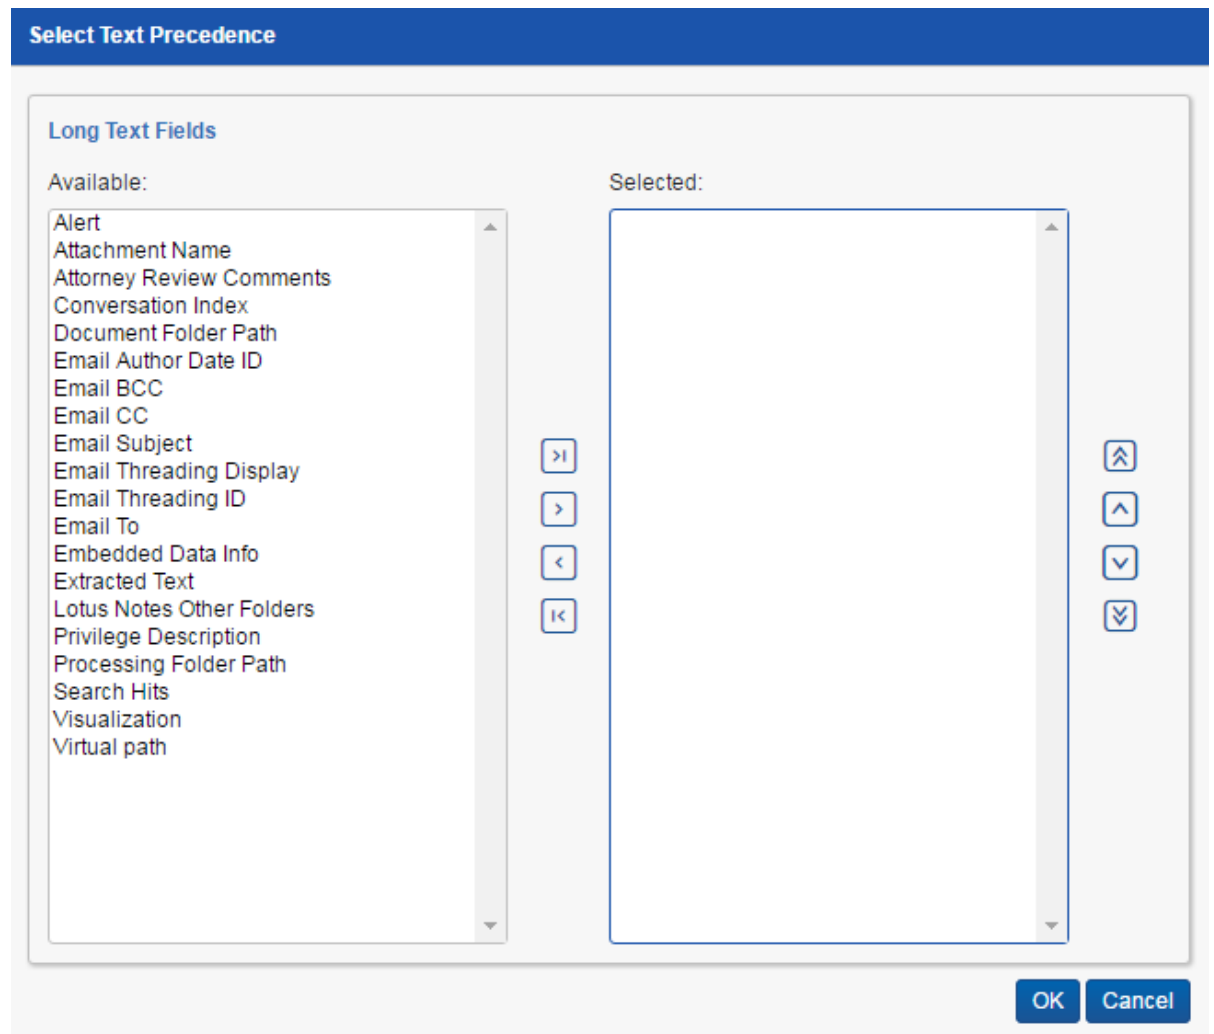

The dialog box is titled "Select Text Precedence" in a blue header bar. Below the header, there is a section titled "Long Text Fields". This section contains two list boxes: "Available:" on the left and "Selected:" on the right. The "Available:" list box contains the following items: Alert, Attachment Name, Attorney Review Comments, Conversation Index, Document Folder Path, Email Author Date ID, Email BCC, Email CC, Email Subject, Email Threading Display, Email Threading ID, Email To, Embedded Data Info, Extracted Text, Lotus Notes Other Folders, Privilege Description, Processing Folder Path, Search Hits, Visualization, and Virtual path. Between the two list boxes are four buttons: ">|", ">", "<", and "<|". To the right of the "Selected:" list box are four buttons: "⬆", "⬆", "⬇", and "⬇". At the bottom right of the dialog box are two buttons: "OK" and "Cancel".

- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported text files. By default, this is set to TEXT.

- **Volume**

- **Prefix**—enter the alpha prefix for the volume identifier. By default, this is set to VOL.
- **Start Number**—select the first number used for the numeric section of the volume identifier. Multiple volumes increment numbers during export creating unique volume identifiers.
- **Number of Digits**—select the number of digits attached to the prefix. (For example, if you select 3, the output is VOL001, VOL002, and so on.)
- **Max Size (MB)**—select the maximum size allowed for each volume in MBs.

- **Subdirectory**

- **Start Number**—select the starting number for the subdirectories.
- **Number of Digits**—select the number of digits of the subdirectory prefix (For example, if you select 3, the output is IMG001, IMG002, and so on.)
- **Max Files**—select the number of files to store in each subdirectory.

8. Click **Save** to save this integration point with these export settings.

Once Relativity saves the integration point, you will be able to run it and export the data based on the settings you specified. See [Running the export job on page 85](#) for details.

6.2 Exporting a folder and subfolders to a load file

To create an integration point specifically for exporting a folder and subfolders, perform the following steps:

1. Navigate to the **Integration Points** tab.
2. Click **New Integration Point**.
3. Complete the following fields in the **Setup** category of the Create Integration Point layout:

Create Integration Point

Cancel

Setup

Complete the Setup

1

2

Back

Next

General

Name:

Doc Export

Type:

Import

Export

Source:

Relativity

Destination:

Load File

Transferred Object:

Document

Profile:

Select...

Include in ECA Promote List:

Yes

No

Advanced

Email Notification Recipients:

Separate by semi-colon

Log Errors:

Yes

No

Scheduling

Enable Scheduler:

Yes

No

- **Name**—the name of your integration for reference purposes.
- **Type**—select **Export** to designate this as an export job. Selecting this sets the Source field to be Relativity.
- **Source**—this is automatically set to **Relativity** since you are exporting data out of a Relativity workspace.
- **Destination**—select **Load File**.
- **Transferred Object**—select **Document**.

- **Profile**—use this to complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply an existing profile, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).
- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semicolons between addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors. Regardless of your selection, job-level errors are always recorded in Relativity.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity does not log these item level errors.
- **Enable Scheduler**—gives you the option of scheduling additional exports. Selecting **Yes** makes the following fields available:
 - **Frequency**—the interval at which Relativity promotes data using this integration point.
 - **Daily**—select this option to promote data once every day.
 - **Weekly**—select this option to promote data on a weekly basis. You can specify how often in the **Reoccur** field, in which you will provide a number value in the **Every # week(s)** choice. You can then specify on which day of the week the data promotion will take place by checking any of the days of the week listed.
 - **Monthly**—select the day of the month that you want this integration point to promote data once every month.
 - **Reoccur**—enter the number of month(s) in which this integration point recurrently promote data.
 - **Send On**
 - **Day __ the month**—select the day of the month that you want this integration point to promote data.
 - **The __ of the Month**—select this option for this integration point to promote data on the chosen day of every month. For example, "The **Second Friday** of the month."
 - **Start Date**—the date that you want Integration Points to start promoting the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop promoting the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point promotes data. This time is local to your PC, not to the server.

4. Click **Next** to advance to the Source Information layout.

5. Complete the following fields on the **Source Information** layout:

The screenshot shows the 'Create Integration Point' dialog with the 'Source Information' tab selected. The progress bar at the top indicates three steps: Setup (completed), Source Information (current), and Destination Information. The 'Source' dropdown is set to 'Folder + Subfolders'. Below it, the 'Folder + Subfolders' and 'Views' dropdowns are highlighted with a red box. The 'Start Export at Record' field is set to 1. Below this, the 'Columns To Export' section is visible, showing a list of source fields, a 'Selected Fields' list, and a 'Renamed Fields' list.

Source Detail

Source: Folder + Subfolders

Folder + Subfolders: Select...

Views: Select...

Start Export at Record: 1

Columns To Export

Source Fields:

- Alert
- Analytics Index
- Artifact ID
- Attachment Name
- Attorney Review Comments
- Batch
- Batch::Assigned To
- Batch::Batch Set
- Batch::Status
- Bates Beg
- Bates Beg Attach
- Bates End
- Bates End Attach
- Case Admin - Production Volume
- Case Admin Saved Searches
- Confidential Designation
- Control Number
- Control Number Beg Attach
- Control Number End
- Control Number End Attach
- Conversation Family
- Conversation Index
- Custodian - Single Choice
- Data Load Date
- Data Load Volume
- Date Created
- Date Last Modified

Selected Fields:

Renamed Fields:

- **Source**—select **Folder + Subfolders** from the drop-down list and specify that you want to select a folder and subfolders from which you want export the data in your load file. You will select this folder below from the folder structure in the Folder + Subfolders field. You will also need to select a View from the Views field.
- **Folder + Subfolders**—click on the down arrow and expand the folder structure, locate the folder and subfolders from which you want to export the data, and select it. This field is only available if you selected Folder + Subfolders as the source above.

Note: When creating an integration point based on a profile, if you change the saved search, folder, or production set on the Setup layout, the fields listed in the Selected Fields window below are not updated to reflect the new source that you selected. If you're not using a profile to creating the integration point, these fields are updated to reflect the newly selected source.

- **Views**—click on the down arrow and select a view for the data that you want to export. This is only available if you selected Folder or Folder + Subfolders as the source above.

- **Start Export at Record**—select a record number that identifies the initial document for export. Integration Points exports the document with this record number and continues exporting documents with subsequent record numbers.
- **Source Fields | Selected Fields | Renamed Fields**—choose the fields that you want to export by moving them to the Selected Fields box. The box on the left displays all available source fields. The fields listed in the Selected Fields column are determined by what you select for the Source field above, as well by the folder, production set, or saved search that you select. Only the fields in the Selected Fields box on the right will be exported when you run the integration point. If you wish to rename the fields in your load file before exporting them, you can do so through the Rename option described below. The fields whose names you change are displayed in the Renamed Fields column.
- **Rename**—gives you the option of renaming the fields in your load file before exporting them. When you click this button, you are presented with the following settings in the Rename Fields window:

- **Selected Field**—displays the field that you have selected from the Source Fields column, the name of which you can change in the Renamed Field below.
- **Renamed Field**—enter the desired new name for the field. This name will appear in the Renamed Fields column of the layout once you click the Update or Update and Next button below. If you do not change the original name of the selected field, then the Renamed Fields column contains an empty row for that field.
- **Update** button—click this button to update the selected field to the name you entered in the Renamed Field setting. When you do this, the renamed field appears in the Renamed Field column.
- **Update and Next** button—click this button to update the selected field to the name you entered in the Renamed Field setting and then move to the next field in the Selected Field column. When you do this, the renamed field appears in the Renamed Field column and the next field appears in the Selected Field setting.
- **Cancel** button—click this button to exit the Rename Fields window without applying any changes to current field names.

6. Click **Next** to advance to the Destination Information layout.

7. Complete the following fields on the **Destination Information** layout:

Create Integration Point [Cancel] ⓘ

Setup Source Information **Destination Information** 3 [Back] [Save]

Export Detail ⓘ

Export Type: ☐ Load File ☒ Images ☒ Natives ☒ Text Fields As Files

Overwrite Files: ☒

Destination Folder: .StructuredData\export_(TimeStamp) [v]

☒ Create Export Folder

Output Settings

LOAD FILE OPTIONS

Image File Format: [Select...] [v]

Data File Format: [Relativity (.dat)] [v]

Data File Encoding: [Unicode] [v]

File Path: ☒ Relative ☐ Absolute ☐ User Prefix: []

Include Native Files Path: ☒

Export Multiple Choice Fields As Nested: ☐

FILE NAMING OPTIONS

Name Output Files After: [Identifier] [v]

Append Original File Name: ☐

IMAGE

File Type: [Single page TIFF/JPEG] [v]

Image Precedence: [Original Images] [v]

Subdirectory Prefix: [IMG] 001

NATIVE

Subdirectory Prefix: [NATIVE] 001

TEXT

Text File Encoding: [Unicode] [v]

Text Precedence: [Select...] [v]

Subdirectory Prefix: [TEXT] 001

Volume & Subdirectory Detail

VOLUME

Prefix: [VOL]

Start Number: [1]

Number Of Digits: [2]

Max Size (MB): [4400]

SUBDIRECTORY

Start Number: [1]

Number Of Digits: [3]

Max Files: [500]

- **Load File Options**

- **Export Type**—this field reflects the type of export job you are running, which you specified on the Setup layout. By default, Load File is selected as the base configuration for your export job. You also have the option of enhancing the load file by selecting **Images**, **Natives**, and **Text Fields as Files**, depending on the makeup of your data. Selecting any of these makes additional corresponding output settings available, which are described below.
 - The Text Fields as Files option determines the export of the extracted text or OCR. Select this option if you want to export files as individual document-level text files, with one file per document. Integration Points includes text as part of your load file if you deselect this option and if a long text field is included in the selected fields that you mapped in the Source Information layout.
- **Destination Folder**—specify the folder into which you want to export the data from the load file. This reads the Default File Repository and lets you select a subfolder of that location.

- **Create Export Folder**—check this box to create an export folder named after the existing Relativity Integration Point job and the timestamp in your export folder. This will prevent the overwriting of any previous Relativity Integration Point exports to your export folder. When you check this box, the value displayed in the Destination Folder field is updated to reflect the [JobName]_[Run-TimeStampUTC] information.
- **Image File Format**—select one of these formats for image-level load file:
 - Opticon
 - IPRO
 - IPRO (Full Text)
- **Data File Format**—select a the format for the document-level load file you are exporting:
 - **Relativity (.dat)**—load file exports with the standard Concordance delimiters.
 - **HTML (.html)**—load file is in HTML and contains hyperlinks to launch any exported files.
 - **Comma-separated (.csv)**—load file exports as delimited text file that uses a comma to separate values.
 - **Custom (.txt)**—load file exports with the custom delimiters that you select.
- **Data File Encoding**—select an encoding for the document-level load file from the drop-down box.
- **File Path**—controls how the export path for the files is referenced. Select one of the following options:
 - **Use absolute paths**—paths to exported files are represented as absolute paths. For example, C:\ Desktop\VOL001\NATIVE001\AS000001.msg
 - **Use relative paths**—paths to exported files are represented as relative paths. For example, .\VOL001\NATIVE001\AS000001.msg
 - **Use prefix**—a prefix is added to the relative path, such as a CD drive letter. For example, D:\VOL001\NATIVE001\AS000001.msg
- **Include Native Files Path**—check this box if you want to include the native file path in your data once you export it. Note that in the load file, for example a Relativity.dat file, there will be file path information added for every record you are exporting.
- **Export Multiple Choice Fields as Nested**—select this option to maintain the hierarchy of Relativity multiple-choice lists, when applicable. The nested value delimiter, a backslash, separates child choices.
- **Name Output Files After**—select one of the following naming convention for exported files:
 - **Identifier**—select this option to name the files after the identifier for your workspace.
 - **Begin production number**—select this option to name the files after the production number. (This number may be the Bates number for a production.) Relativity names files after the production number only if you select Produced Images as the Production Precedence below.
- **Append Original File Name**—select this option to append the original name of the file to the end of the exported file name.

- **Image**—the following fields are only available if you selected Images for the Export Type field above.
 - **File Type**—select one of these file types:
 - Single-page TIF/JPG
 - Multi-page TIF
 - PDF
 - **Production Precedence**—select one of the following groups of produced documents for export instead of the original images:
 - **Original Images**—exports only the original, non-produced images.
 - **Produced Images**—exports a produced version of the images. When you select this, the following fields become available:

IMAGE

File Type: Single page TIFF/JPEG

Production Precedence: Produced Images

Image Productions: November Production ...

Include Original Images If Not Produced: ☐

Subdirectory Prefix: IMG 001

- **Image Productions**—select the produced images that you want to act as the precedence.
 - **Include Original Images If Not Produced**—exports only the original images in the event that they have not been produced.
- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported images. By default, this is set to IMG.
- **Native**
 - **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported native files. By default, this is set to NATIVE. This field is only available if you selected Natives for the Export Type field above.
- **Text**—the following fields are only available if you selected text Fields As Files for the Export Type field above.
 - **Text File Encoding**—select the encoding for the document-level text files
 - **Text Precedence**—select and assign an order to long text fields that Relativity checks for text when performing an export. You must select one or more long text fields to use this functionality. Click the ellipsis to display the Pick Text Precedence pop-up. To move fields between columns, highlight them and click the Right or Left single or double arrows. Use the Up and Down arrows to

order the precedence of the fields.

Select Text Precedence

Long Text Fields

Available:

- Alert
- Attachment Name
- Attorney Review Comments
- Conversation Index
- Document Folder Path
- Email Author Date ID
- Email BCC
- Email CC
- Email Subject
- Email Threading Display
- Email Threading ID
- Email To
- Embedded Data Info
- Extracted Text
- Lotus Notes Other Folders
- Privilege Description
- Processing Folder Path
- Search Hits
- Visualization
- Virtual path

Selected:

>| > < <|

<| < > >|

OK Cancel

- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported text files. By default, this is set to TEXT.

- **Volume**

- **Prefix**—enter the alpha prefix for the volume identifier. By default, this is set to VOL.
- **Start Number**—select the first number used for the numeric section of the volume identifier. Multiple volumes increment numbers during export creating unique volume identifiers.
- **Number of Digits**—select the number of digits attached to the prefix. (For example, if you select 2, the output is VOL001, VOL002, and so on.)
- **Max Size (MB)**—select the maximum size allowed for each volume in MBs.

- **Subdirectory**

- **Start Number**—select the starting number for the subdirectories.
- **Number of Digits**—select the number of digits of the subdirectory prefix (For example, if you select 3, the output is IMG001, IMG002, and so on.)
- **Max Files**—select the number of files to store in each subdirectory.

8. Click **Save** to save this integration point with these export settings.

Once Relativity saves the integration point, you will be able to run it and export the data based on the settings you specified. See [Running the export job](#) for details.

6.3 Exporting a production to a load file

To create an integration point specifically for exporting a production set, perform the following steps:

1. Navigate to the **Integration Points** tab.
2. Click **New Integration Point**.
3. Complete the following fields in the **Setup** category of the Create Integration Point layout:

Create Integration Point

Cancel

Setup

Complete the Setup

1

2

Back

Next

General

Name:

Doc Export

Type:

Import

Export

Source:

Relativity

Destination:

Load File

Transferred Object:

Document

Profile:

Select...

Include in ECA Promote List:

Yes

No

Advanced

Email Notification Recipients:

Separate by semi-colon

Log Errors:

Yes

No

Scheduling

Enable Scheduler:

Yes

No

- **Name**—the name of your integration for reference purposes.
- **Type**—select **Export** to designate this as an export job. Selecting this sets the Source field to be Relativity.
- **Source**—this is automatically set to **Relativity** since you are exporting data out of a Relativity workspace.
- **Destination**—select **Load File**.
- **Transferred Object**—select **Document**.

- **Profile**—use this to complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the Connect to Source layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply an existing profile, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).
- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item level errors. Regardless of your selection, job-level errors are always recorded in Relativity.
 - If you select **Yes**, each job also logs any item level errors.
 - If you select **No**, Relativity does not log these item level errors.
- **Enable Scheduler**—gives you the option of scheduling additional exports. Selecting **Yes** makes the following fields available:
 - **Frequency**—the interval at which Relativity promotes data using this integration point.
 - **Daily**—select this option to promote data once every day.
 - **Weekly**—select this option to promote data on a weekly basis. You can specify how often in the **Reoccur** field, in which you will provide a number value in the **Every # week(s)** choice. You can then specify on which day of the week the data promotion will take place by checking any of the days of the week listed.
 - **Monthly**—select the day of the month that you want this integration point to promote data once every month.
 - **Reoccur**—enter the number of month(s) in which this integration point recurrently promotes data.
 - **Send On**
 - **Day __ the month**—select the day of the month that you want this integration point to promote data.
 - **The __ of the Month**—select this option for this integration point to promote data on the chosen day of every month. For example, "The **Second Friday** of the month."
 - **Start Date**—the date that you want Integration Points to start promoting the data.
 - **End Date**—(Optional) the date that you want Integration Points to stop promoting the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time**—the time at which this integration point promotes data. This time is local to your PC, not to the server.

4. Click **Next** to advance to the Source Information layout.

5. Complete the following fields on the **Source Information** layout:


The screenshot shows the 'Create Integration Point' wizard at the 'Source Information' step. The 'Source Detail' section is highlighted with a red box, showing 'Source' as 'Production', 'Production Set' as 'Select...', and 'Start Export at Record' as '1'. Below this, the 'Columns To Export' section shows a list of 'Source Fields' on the left, a 'Selected Fields' column in the middle, and a 'Renamed Fields' column on the right. A 'Rename' button is positioned between the 'Selected Fields' and 'Renamed Fields' columns.

- **Source**—select **Production** from the drop-down list. specify that you want to select a production set, from which you want export the data in your load file. You will select this folder below from the folder structure in the Folder + Subfolders field. You will also need to select a View from the Views field.
- **Production Set**—click on the down arrow and select the production set that you want to act as the source for the load file. This field is only available if you have selected Production as the source above.

Note: When creating an integration point based on a profile, if you change the saved search, folder, or production set on the Setup layout, the fields listed in the Selected Fields window below are not updated to reflect the new source that you selected. If you're not using a profile to creating the integration point, these fields are updated to reflect the newly selected source.

- **Start Export at Record**—select a record number that identifies the initial document for export. Integration Points exports the document with this record number and continues exporting documents with subsequent record numbers.
- **Source Fields | Selected Fields| Renamed Fields**—choose the fields that you want to export by moving them to the Selected Fields box. The box on the left displays all available source fields. The fields listed in the Selected Fields column are determined by what you select for the Source field above, as well by the folder, production set, or saved search that you select. Only the fields in the Selected Fields box on the right will be exported when you run the integration point. If you wish to rename the fields in your load file before exporting them, you can do so through the Rename option described below. The fields whose names you change are displayed in the Renamed Fields column.

- **Rename**—gives you the option of renaming the fields in your load file before exporting them. When you click this button, you are presented with the following settings in the Rename Fields window:

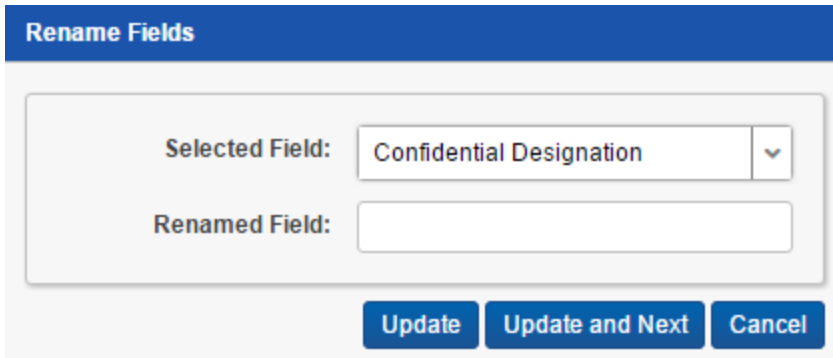

- **Selected Field**—displays the field that you have selected from the Source Fields column, the name of which you can change in the Renamed Field below.
- **Renamed Field**—enter the desired new name for the field. This name will appear in the Renamed Fields column of the layout once you click Update or Update and Next below. If you do not change the original name of the selected field, then the Renamed Fields column contains an empty row for that field.
- **Update** button—click this button to update the selected field to the name you entered in the Renamed Field setting. When you do this, the renamed field appears in the Renamed Field column.
- **Update and Next** button—click this button to update the selected field to the name you entered in the Renamed Field setting and then move to the next field in the Selected Field column. When you do this, the renamed field appears in the Renamed Field column and the next field appears in the Selected Field setting.
- **Cancel** button—click this button to exit the Rename Fields window without applying any changes to current field names.

6. Click **Next** to advance to the Destination Information layout.

7. Complete the following fields on the **Destination Information** layout:

- **Load File Options**

- **Export Type**—this field reflects the type of export job you are running, which you specified on the Setup layout. By default, Load File is selected as the base configuration for your export job. You also have the option of enhancing the load file by selecting **Images**, **Natives**, and **Text Fields as Files**, depending on the makeup of your data. Selecting any of these makes additional corresponding output settings available, which are described below.
 - The Text Fields as Files option determines the export of the extracted text or OCR. Select this option if you want to export files as individual document-level text files, with one file per document. Integration Points includes text as part of your load file if you deselect this option and if a long text field is included in the selected fields that you mapped in the Source Information layout.
- **Destination Folder**—specify the folder into which you want to export the data from the load file. This reads the Default File Repository and lets you select a subfolder of that location.

- **Create Export Folder**—check this box to create an export folder named after the existing Relativity Integration Point job and the timestamp in your export folder. This will prevent the overwriting of any previous Relativity Integration Point exports to your export folder. When you check this box, the value displayed in the Destination Folder field is updated to reflect the [JobName]_[Run-TimeStampUTC] information.
- **Image File Format**—select one of these formats for image-level load file:
 - Opticon
 - IPRO
 - IPRO (Full Text)
- **Data File Format**—select a the format for the document-level load file you are exporting:
 - **Relativity (.dat)**—load file exports with the standard Concordance delimiters.
 - **HTML (.html)**—load file is in HTML and contains hyperlinks to launch any exported files.
 - **Comma-separated (.csv)**—load file exports as delimited text file that uses a comma to separate values.
 - **Custom (.txt)**—load file exports with the custom delimiters that you select.
- **Data File Encoding**—select an encoding for the document-level load file from the drop-down box.
- **File Path**—controls how the export path for the files is referenced. Select one of the following options:
 - **Use absolute paths**—paths to exported files are represented as absolute paths. For example, C:\ Desktop\VOL001\NATIVE001\AS000001.msg
 - **Use relative paths**—paths to exported files are represented as relative paths. For example, .\VOL001\NATIVE001\AS000001.msg
 - **Use prefix**—a prefix is added to the relative path, such as a CD drive letter. For example, D:\VOL001\NATIVE001\AS000001.msg
- **Include Native Files Path**—check this box if you want to include the native file path in your data once you export it. Note that in the load file, for example a Relativity.dat file, there will be file path information added for every record you are exporting.
- **Export Multiple Choice Fields as Nested**—select this option to maintain the hierarchy of Relativity multiple-choice lists, when applicable. The nested value delimiter, a backslash, separates child choices.
- **Name Output Files After**—select one of the following naming convention for exported files:
 - **Identifier**—select this option to name the files after the identifier for your workspace.
 - **Begin production number**—select this option to name the files after the production number. (This number may be the Bates number for a production.) Relativity names files after the production number only if you select Produced Images as the Production Precedence below.
- **Append Original File Name**—select this option to append the original name of the file to the end of the exported file name.

- **Image**—the following fields are only available if you selected Images for the Export Type field above.
 - **File Type**—select one of these file types:
 - Single-page TIF/JPG
 - Multi-page TIF
 - PDF
 - **Production Precedence**—select one of the following groups of produced documents for export instead of the original images:
 - **Original Images**—exports only the original, non-produced images.
 - **Produced Images**—exports a produced version of the images. When you select this, the following fields become available:

IMAGE

File Type: Single page TIFF/JPEG

Production Precedence: Produced Images


Image Productions: November Production ...

Include Original Images If Not Produced: ☐

Subdirectory Prefix: IMG 001

- **Image Productions**—select the produced images that you want to act as the precedence.
 - **Include Original Images If Not Produced**—exports only the original images in the event that they have not been produced.
- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported images. By default, this is set to IMG.
- **Native**
 - **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported native files. By default, this is set to NATIVE. This field is only available if you selected Natives for the Export Type field above.
- **Text**—the following fields are only available if you selected text Fields As Files for the Export Type field above.
 - **Text File Encoding**—select the encoding for the document-level text files
 - **Text Precedence**—select and assign an order to long text fields that Relativity checks for text when performing an export. You must select one or more long text fields to use this functionality. Click the ellipsis to display the Pick Text Precedence pop-up. To move fields between columns, highlight them and click the Right or Left single or double arrows. Use the Up and Down arrows to

order the precedence of the fields.

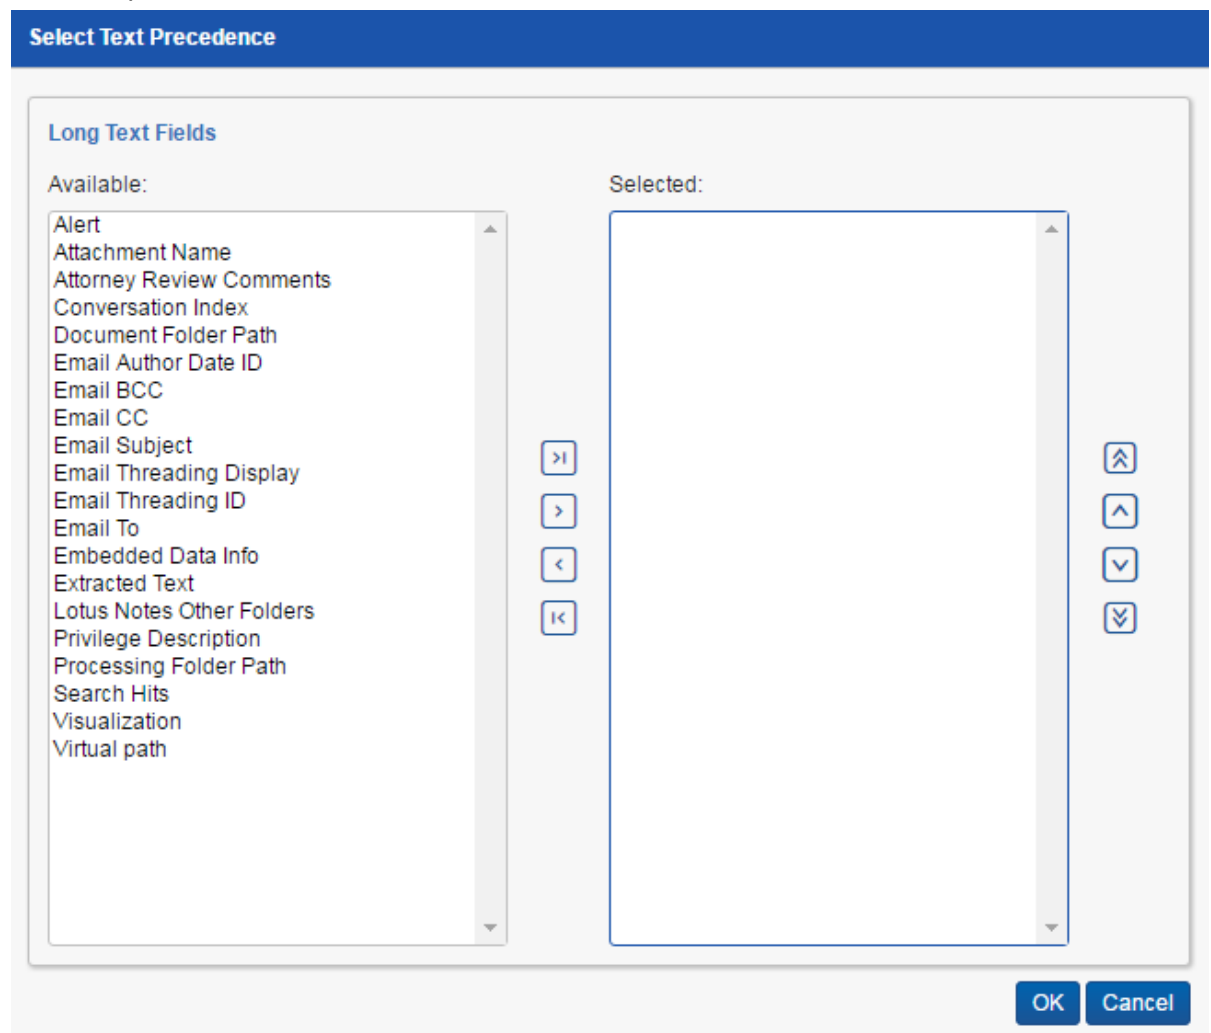

The dialog box is titled "Select Text Precedence" in a blue header bar. Below the header, there is a section titled "Long Text Fields". This section contains two list boxes: "Available:" on the left and "Selected:" on the right. The "Available:" list box contains the following items: Alert, Attachment Name, Attorney Review Comments, Conversation Index, Document Folder Path, Email Author Date ID, Email BCC, Email CC, Email Subject, Email Threading Display, Email Threading ID, Email To, Embedded Data Info, Extracted Text, Lotus Notes Other Folders, Privilege Description, Processing Folder Path, Search Hits, Visualization, and Virtual path. Between the two list boxes are four buttons: ">|", ">", "<", and "<|". To the right of the "Selected:" list box are four buttons: "⬆", "⬆", "⬇", and "⬇". At the bottom right of the dialog box are two buttons: "OK" and "Cancel".

- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported text files. By default, this is set to TEXT.
- **Volume**
 - **Prefix**—enter the alpha prefix for the volume identifier. By default, this is set to VOL.
 - **Start Number**—select the first number used for the numeric section of the volume identifier. Multiple volumes increment numbers during export creating unique volume identifiers.
 - **Number of Digits**—select the number of digits attached to the prefix. (For example, if you select 2, the output is VOL001, VOL002, and so on.)
 - **Max Size (MB)**—select the maximum size allowed for each volume in MBs.
- **Subdirectory**
 - **Start Number**—select the starting number for the subdirectories.
 - **Number of Digits**—select the number of digits of the subdirectory prefix (For example, if you select 3, the output is IMG001, IMG002, and so on.)
 - **Max Files**—select the number of files to store in each subdirectory.


8. Click **Save** to save this integration point with these export settings.

Once Relativity saves the integration point, you will be able to run it and export the data based on the settings you specified. See [Running the export job on page 85](#) for details.

6.4 Exporting a saved search to a load file

To create an integration point specifically for exporting a saved search, perform the following steps:

1. Navigate to the **Integration Points** tab.
2. Click **New Integration Point**.
3. Complete the following fields in the **Setup** category of the Create Integration Point layout:

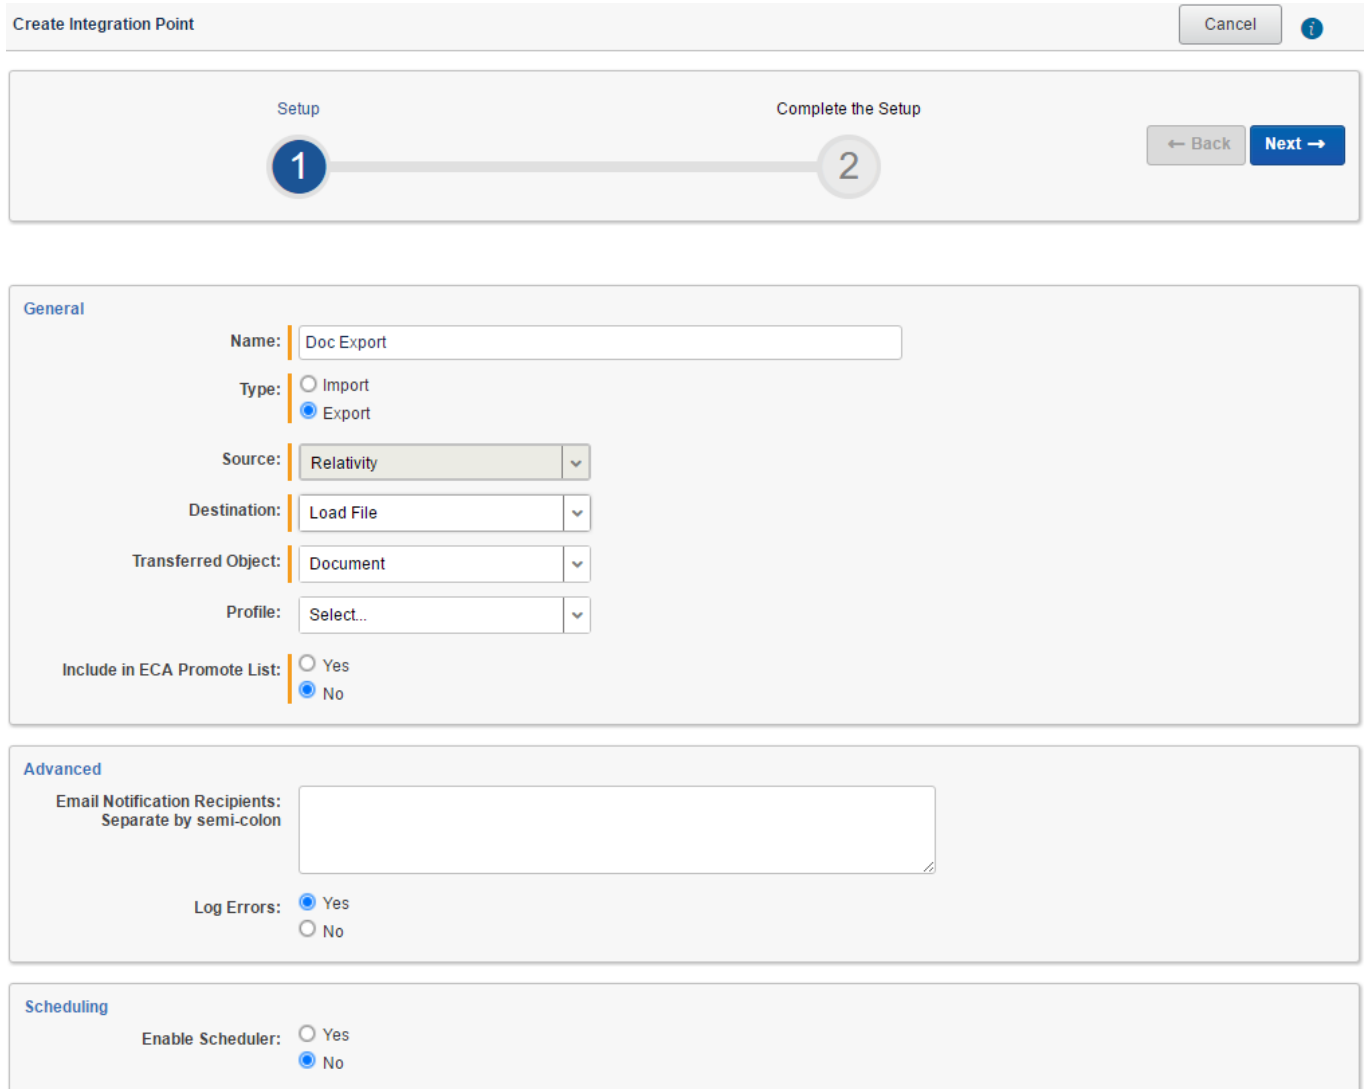

Create Integration Point Cancel i

Setup 1 Complete the Setup 2 ← Back Next →

General

Name:

Type: ☐ Import ☒ Export

Source:

Destination:

Transferred Object:

Profile:

Include in ECA Promote List: ☐ Yes ☒ No

Advanced

Email Notification Recipients:

Log Errors: ☒ Yes ☐ No

Scheduling

Enable Scheduler: ☐ Yes ☒ No

- **Name** —the name of your integration for reference purposes.
- **Type** —select **Export** to designate this as an export job. Selecting this sets the Source field to be Relativity.
- **Source** —this is automatically set to **Relativity** since you are exporting data out of a Relativity workspace.
- **Destination** —select **Load File**.
- **Transferred Object** —select **Document**.

- **Profile** —use this to complete the remaining Integration Points settings based on the settings of a saved profile. [Integration Points profiles on page 11](#).
- **Email Notification Recipients** —enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons between addresses.
- **Log Errors** —select **Yes** or **No** to denote whether Relativity tracks item level errors. Regardless of your selection, job-level errors are always recorded in Relativity.
 - If you select **Yes** , each job also logs any item level errors.
 - If you select **No** , Relativity does not log these item level errors.
- **Enable Scheduler** —gives you the option of scheduling additional exports. Selecting **Yes** makes the following fields available:
 - **Frequency** —the interval at which Relativity promotes data using this integration point.
 - **Daily** —select this option to promote data once every day.
 - **Weekly** —select this option to promote data on a weekly basis. You can specify how often in the **Reoccur** field, in which you will provide a number value in the **Every # week(s)** choice. You can then specify on which day of the week the data promotion will take place by checking any of the days of the week listed.
 - **Monthly** —select the day of the month that you want this integration point to promote data once every month.
 - **Reoccur** —enter the number of month(s) in which this integration point recurrently promote data.
 - **Send On**
 - **Day __ the month** —select the day of the month that you want this integration point to promote data.
 - **The __ of the Month** —select this option for this integration point to promote data on the chosen day of every month. For example, "The **Second Friday** of the month."
 - **Start Date** —the date that you want Integration Points to start promoting the data.
 - **End Date** —(Optional) the date that you want Integration Points to stop promoting the data. Leaving the End Date blank causes the Integration Point to run indefinitely at the scheduled interval.
 - **Scheduled Time** —the time at which this integration point promote data. This time is local to your PC, not to the server.

4. Click **Next** to advance to the Source Information layout.

5. Complete the following fields on the **Source Information** layout:


The screenshot shows the 'Create Integration Point' window with the 'Source Information' tab selected. The progress bar at the top indicates three steps: Setup (1), Source Information (2, active), and Destination Information (3). The 'Source Information' section includes a 'Source' dropdown set to 'Saved Search', a 'Saved Search' dropdown set to 'SBeck', and a 'Start Export at Record' field set to '1'. Below this is the 'Columns To Export' section, which has three columns: 'Source Fields' (a list of available fields), 'Selected Fields' (an empty list), and 'Renamed Fields' (an empty list). A 'Rename' button is located between the 'Selected Fields' and 'Renamed Fields' columns.

- **Source**—select **Saved Search** from the drop-down list. specify that you want to select a saved search, from which you want export the data in your load file. You will select this folder below from the folder structure in the Folder + Subfolders field. You will also need to select a View from the Views field.
- **Saved Search**—click on the down arrow and select the saved search that you want to act as the source for the load file. This field is only available if you selected Saved Search as the source above.

Note: When creating an integration point based on a profile, if you change the saved search, folder, or production set on the Setup layout, the fields listed in the Selected Fields window below are not updated to reflect the new source that you selected. If you're not using a profile to creating the integration point, these fields are updated to reflect the newly selected source.

- **Start Export at Record**—select a record number that identifies the initial document for export. Integration Points exports the document with this record number and continues exporting documents with subsequent record numbers.
- **Source Fields | Selected Fields| Renamed Fields**—choose the fields that you want to export by moving them to the Selected Fields box. The box on the left displays all available source fields. The fields listed in the Selected Fields column are determined by what you select for the Source field above, as well by the folder, production set, or saved search that you select. Only the fields in the Selected Fields box on the right will be exported when you run the integration point. If you wish to rename the fields in your load file before exporting them, you can do so through the Rename option described below. The fields whose names you change are displayed in the Renamed Fields column.

- **Rename**—gives you the option of renaming the fields in your load file before exporting them. When you click this button, you are presented with the following settings in the Rename Fields window:

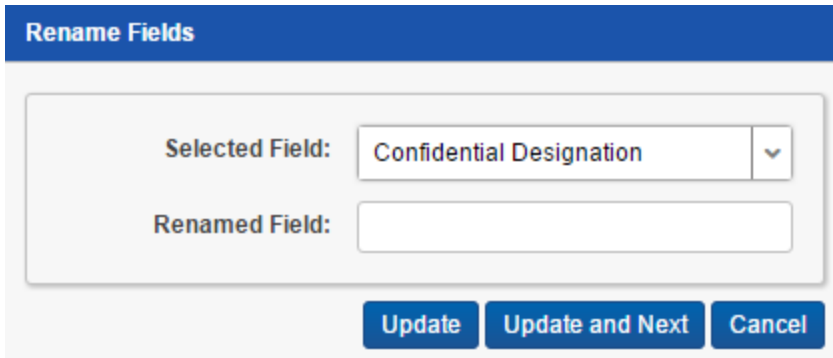

- **Selected Field**—displays the field that you selected from the Source Fields column, the name of which you can change in the Renamed Field below.
- **Renamed Field**—enter the desired new name for the field. This name will appear in the Renamed Fields column of the layout once you click Update or Update and Next below. If you do not change the original name of the selected field, then the Renamed Fields column contains an empty row for that field.
- **Update** button—click this button to update the selected field to the name you entered in the Renamed Field setting. When you do this, the renamed field appears in the Renamed Field column.
- **Update and Next** button—click this button to update the selected field to the name you entered in the Renamed Field setting and then move to the next field in the Selected Field column. When you do this, the renamed field appears in the Renamed Field column and the next field appears in the Selected Field setting.
- **Cancel** button—click this to exit the Rename Fields window without applying any changes to current field names.

6. Click **Next** to advance to the Destination Information layout.

7. Complete the following fields on the **Destination Information** layout:

Create Integration Point [Cancel] ⓘ

Setup Source Information **Destination Information** 3 [Back] [Save]

Export Detail ⓘ

Export Type: ☐ Load File ☒ Images ☒ Natives ☒ Text Fields As Files

Destination Folder: .StructuredData\export_(TimeStamp) [v]

☒ Create Export Folder

Overwrite Files: ☒

Output Settings

LOAD FILE OPTIONS

Image File Format: [Select...] [v]

Data File Format: [Relativity (.dat)] [v]

Data File Encoding: [Unicode] [v]

File Path: ☒ Relative ☐ Absolute ☐ User Prefix: []

Include Native Files Path: ☒

Export Multiple Choice Fields As Nested: ☐

FILE NAMING OPTIONS

Name Output Files After: [Identifier] [v]

Append Original File Name: ☐

IMAGE

File Type: [Single page TIFF/JPEG] [v]

Image Precedence: [Original Images] [v]

Subdirectory Prefix: [IMG] [001]

NATIVE

Subdirectory Prefix: [NATIVE] [001]

TEXT

Text File Encoding: [Unicode] [v]

Text Precedence: [Select...] [v]

Subdirectory Prefix: [TEXT] [001]

Volume & Subdirectory Detail

VOLUME

Prefix: [VOL]

Start Number: [1]

Number Of Digits: [2]

Max Size (MB): [4400]

SUBDIRECTORY

Start Number: [1]

Number Of Digits: [3]

Max Files: [500]

- **Load File Options**

- **Export Type**—this field reflects the type of export job you are running, which you specified on the Setup layout. By default, Load File is selected as the base configuration for your export job. You also have the option of enhancing the load file by selecting **Images**, **Natives**, and **Text Fields as Files**, depending on the makeup of your data. Selecting any of these makes additional corresponding output settings available, which are described below.
 - The Text Fields as Files option determines the export of the extracted text or OCR. Select this option if you want to export files as individual document-level text files, with one file per document. Integration Points includes text as part of your load file if you deselect this option and if a long text field is included in the selected fields that you mapped in the Source Information layout.
- **Destination Folder**—specify the folder into which you want to export the data from the load file. This reads the Default File Repository and lets you select a subfolder of that location.

- **Create Export Folder**—check this box to create an export folder named after the existing Relativity Integration Point job and the timestamp in your export folder. This will prevent the overwriting of any previous Relativity Integration Point exports to your export folder. When you check this box, the value displayed in the Destination Folder field is updated to reflect the [JobName]_[Run-TimeStampUTC] information.
- **Image File Format**—select one of these formats for image-level load file:
 - Opticon
 - IPRO
 - IPRO (Full Text)
- **Data File Format**—select a the format for the document-level load file you are exporting:
 - **Relativity (.dat)**—load file exports with the standard Concordance delimiters.
 - **HTML (.html)**—load file is in HTML and contains hyperlinks to launch any exported files.
 - **Comma-separated (.csv)**—load file exports as delimited text file that uses a comma to separate values.
 - **Custom (.txt)**—load file exports with the custom delimiters that you select.
- **Data File Encoding**—select an encoding for the document-level load file from the drop-down box.
- **File Path**—controls how the export path for the files is referenced. Select one of the following options:
 - **Use absolute paths**—paths to exported files are represented as absolute paths. For example, C:\ Desktop\VOL001\NATIVE001\AS000001.msg
 - **Use relative paths**—paths to exported files are represented as relative paths. For example, .\VOL001\NATIVE001\AS000001.msg
 - **Use prefix**—a prefix is added to the relative path, such as a CD drive letter. For example, D:\VOL001\NATIVE001\AS000001.msg
- **Include Native Files Path**—check this box if you want to include the native file path in your data once you export it. Note that in the load file, for example a Relativity.dat file, there will be file path information added for every record you are exporting.
- **Export Multiple Choice Fields as Nested**—select this option to maintain the hierarchy of Relativity multiple-choice lists, when applicable. The nested value delimiter, a backslash, separates child choices.
- **Name Output Files After**—select one of the following naming convention for exported files:
 - **Identifier**—select this option to name the files after the identifier for your workspace.
 - **Begin production number**—select this option to name the files after the production number. (This number may be the Bates number for a production.) Relativity names files after the production number only if you select Produced Images as the Production Precedence below.
- **Append Original File Name**—select this option to append the original name of the file to the end of the exported file name.

- **Image**—the following fields are only available if you selected Images for the Export Type field above.
 - **File Type**—select one of these file types:
 - Single-page TIF/JPG
 - Multi-page TIF
 - PDF
 - **Production Precedence**—select one of the following groups of produced documents for export instead of the original images:
 - **Original Images**—exports only the original, non-produced images.
 - **Produced Images**—exports a produced version of the images. When you select this, the following fields become available:

IMAGE

File Type: Single page TIFF/JPEG

Production Precedence: Produced Images

Image Productions: November Production

Include Original Images If Not Produced: ☐

Subdirectory Prefix: IMG 001

- **Image Productions**—select the produced images that you want to act as the precedence.
 - **Include Original Images If Not Produced**—exports only the original images in the event that they have not been produced.
- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported images. By default, this is set to IMG.
- **Native**
 - **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported native files. By default, this is set to NATIVE. This field is only available if you selected Natives for the Export Type field above.
- **Text**—the following fields are only available if you selected text Fields As Files for the Export Type field above.
 - **Text File Encoding**—select the encoding for the document-level text files
 - **Text Precedence**—select and assign an order to long text fields that Relativity checks for text when performing an export. You must select one or more long text fields to use this functionality. Click the ellipsis to display the Pick Text Precedence pop-up. To move fields between columns, highlight them and click the Right or Left single or double arrows. Use the Up and Down arrows to

order the precedence of the fields.

Select Text Precedence

Long Text Fields

Available:

- Alert
- Attachment Name
- Attorney Review Comments
- Conversation Index
- Document Folder Path
- Email Author Date ID
- Email BCC
- Email CC
- Email Subject
- Email Threading Display
- Email Threading ID
- Email To
- Embedded Data Info
- Extracted Text
- Lotus Notes Other Folders
- Privilege Description
- Processing Folder Path
- Search Hits
- Visualization
- Virtual path

Selected:

Buttons: >|, >, <, <|, <|, <, >, >|

OK Cancel

- **Subdirectory Prefix**—enter the alpha prefix for the subdirectory that stores exported text files. By default, this is set to TEXT.

- **Volume**

- **Prefix**—enter the alpha prefix for the volume identifier. By default, this is set to VOL.
- **Start Number**—select the first number used for the numeric section of the volume identifier. Multiple volumes increment numbers during export creating unique volume identifiers.
- **Number of Digits**—select the number of digits attached to the prefix. (For example, if you select 2, the output is VOL001, VOL002, and so on.)
- **Max Size (MB)**—select the maximum size allowed for each volume in MBs.

- **Subdirectory**

- **Start Number**—select the starting number for the subdirectories.
- **Number of Digits**—select the number of digits of the subdirectory prefix (For example, if you select 3, the output is IMG001, IMG002, and so on.)
- **Max Files**—select the number of files to store in each subdirectory.

8. Click **Save** to save this integration point with these export settings.

Once Relativity saves the integration point, you will be able to run it and export the data based on the settings you specified. See [Running the export job below](#) for details.

6.5 Exporting to a Relativity workspace


In addition to exporting to a CSV and load file, you have the option of exporting data from one Relativity workspace to another Relativity workspace. For more information on this capability, see [Transferring \(promoting\) data between workspaces on page 90](#).

6.6 Running the export job


To export your load file based on the export settings you specified above, click **Run** on the Transfer Options console on the saved integration point.

Note: All Integration Points jobs are fully editable after run.

Note that you also have the option of saving this integration point as a profile through the Save as Profile button on the Transfer Options console. For more information on profiles, see [Integration Points profiles on page 11](#).

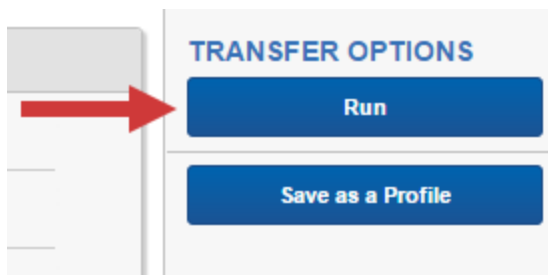

Click **OK** on the run confirmation message, which informs you of where your documents will be placed.

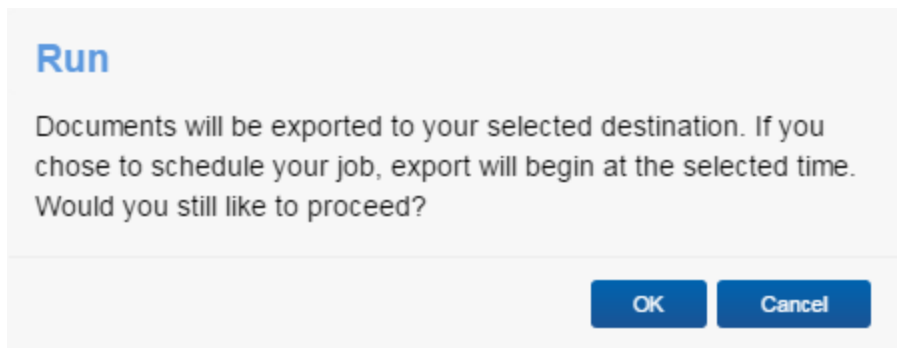

The Run button turns to red and gives you the option of stopping the job you just kicked off, as long as that job has a status of Pending or Processing.

If necessary, monitor the progress of the promote job by viewing the **Status** field in the **Status** view at the bottom of the layout. You will see any of the following status values:

- **Pending**—the job has yet to be picked up by an agent.
- **Validation**—an agent is validating the job to make sure it has the required settings, such as access to the source and destination objects (saved searches, workspaces, etc.). If validation fails, the status changes to "Validation failed," and Relativity logs an error. If the validation succeeds, the job moves on to a status of "Processing."
- **Validation failed**—the job validation has failed, resulting in an error, the details of which are saved in the Job History Errors tab.

- **Processing**—the agent has picked up the job and is in the process of completing it.
- **Completed**—the job is complete, and no errors occurred.
- **Completed with errors**—the job is complete and errors have occurred. You can view error details in the Job History Errors tab. See [Monitoring job history and errors on page 105](#) for details.
- **Error—job failed**—a job-level error occurred and the job did not complete because it failed. You can view error details in the Job History Errors tab. See [Monitoring job history and errors on page 105](#) for details.
- **Stopping**—you clicked the Stop button, and the stop job has yet to be picked up by an agent.
- **Stopped**—the job has been stopped.

6.6.1 Stopping and restarting an export job

Relativity gives you the option of stopping an export job from proceeding in the event that you need to re-prioritize it or because you made a mistake when creating it. You can only do so when that job has a status of Pending or Processing.

Note the following about stopping an Integration Points job:

- You can also stop a scheduled job if it has a status of Pending or Processing.
- A job is cannot be stopped if it has any status other than Pending or Processing, or the point at which Relativity starts promoting documents with such as information as the user who tagged them and the source workspace.
- When you click Stop, Relativity immediately stops creating new errors for that job.
- When you click Stop on a run-now job, Relativity marks all errors associated with the current job history as Expired.
- When you click Stop on a retry job, Relativity marks all errors associated with the current job history and the previous job as Expired.
- You can start a scheduled job after you have already stopped it.
- The item counts on the Integration Points layout reflect all items promoted before the agent received the signal to stop the job.

To stop an export job, follow the steps below.

1. Click **Stop** on the console.

The screenshot shows the 'Integration Point Details' page for a job named 'Export Load File'. The 'General' tab is active, displaying various configuration fields such as 'Name', 'Export Type', 'Source details', 'Destination details', 'Overwrite files', 'Start at record', 'Load file format', 'File path', 'Text and Native File Names', and 'Multiple choice as nested'. On the right side, there is a 'TRANSFER OPTIONS' panel with a prominent red 'Stop' button and a 'Save as a Profile' button below it. A red arrow points from the 'Stop' button in the Transfer Options panel to the 'Stop' button in the console.

Relativity then informs you that you will not be removing any data by stopping the transfer and that you should check to make sure that the overwrite setting you previously entered is still appropriate for the re-run.

2. Click **Stop Transfer** to proceed.

The screenshot shows a modal dialog box titled 'Stop Transfer'. The text inside reads: 'Stopping this transfer will not remove any data that was transferred. When re-running this transfer, make sure that your overwrite settings will return expected results.' At the bottom of the dialog, there are two buttons: 'Stop Transfer' and 'Cancel'.

3. Once Relativity stops the job, the Job Status field on the Status view reflects the stopped job.

Status									
Start Time (UTC)	Artifact ID	Name	Integration Point	Job Type	Job Status	Destination Worksp...	Items Transferred	Total Items	Items with Errors
9/21/2016 7:33 PM	1043050	ECA integration points	ECA integration points	Run	Stopped	Documentation Destination - 2934933	200	733	0
9/21/2016 7:32 PM	1043048	ECA integration points	ECA integration points	Run	Stopped	Documentation Destination - 2934933	0		0


To re-start a stopped job, click **Run**. When you do this, Relativity begins to transfer data again from the beginning but does not remove any data already transferred.

6.7 Stopping (disabling) an Integration Point from promoting data

To stop, or disable, an integration point from promoting data, simply disable, or turn off, the scheduler option.

1. From the Integration Points landing page, click the Integration Point **Name** that you wish to disable.
2. Click **Edit**.


3. From the Import Scheduling section under Enable Scheduler, select **No**. This disables the scheduling mechanism for that integration point.



6.8 Scheduler date format considerations

The integration points scheduler accepts non-U.S. date formats to further accommodate, for example, users in Australia.

In this case, the default language in your browser settings is set to English (Australian) or any other language that would display a non-U.S. date format of Day/Month/Year instead of Month/Day/Year.

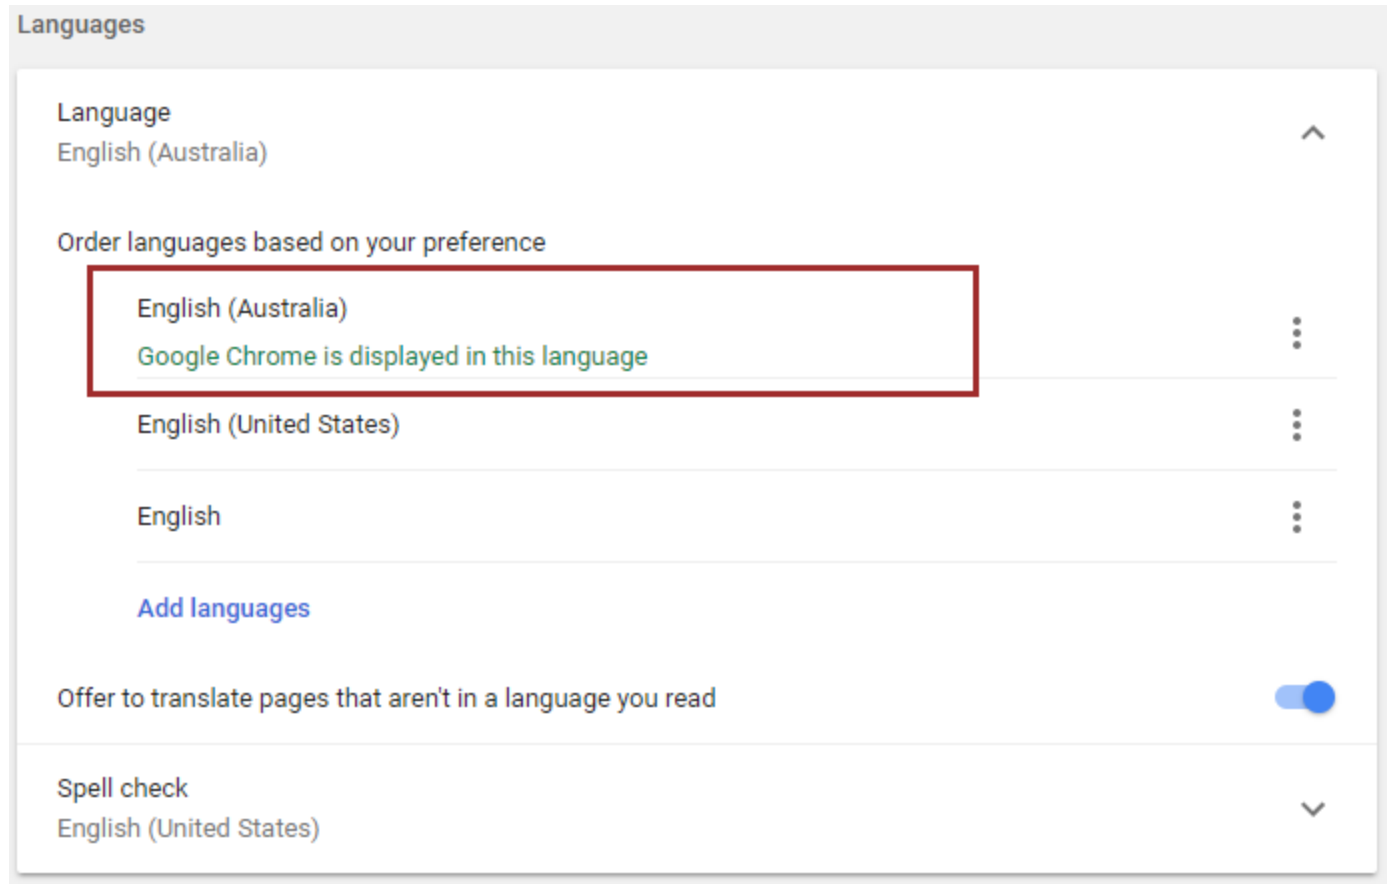

Relativity then properly displays the date when you select it for the Start and End Date fields in the Scheduling category.

Scheduling

Enable Scheduler: ☒ Yes ☐ No

Frequency:

Start Date:

End Date:

Scheduled Time:

Time Zone:

This date format will also appear anywhere else in Relativity where a date is displayed, such as on the saved Integration Point Details layout and the Date Last Modified field on the Document list.

6.9 Automatically stopping a scheduled job that repeatedly fails

In some cases, a scheduled job may fail each time it is executed, such as when a job needs reconfiguring, and it may take some time before you become aware of these failed attempts. To mitigate this situation, you can configure an instance setting which will specify the maximum number of consecutive failed attempts encountered before the job is automatically stopped. For example, you may want to stop the scheduled job after four consecutive failed attempts at running.

1. Navigate to the **Instance Settings** page.
2. Create a new instance setting with the following settings.
 - **Name**—enter **MaxFailedScheduledJobsCount**.
 - **Section**—enter **kcura.IntegrationPoints**.
 - **Value Type**—select **Integer 32-bit**.
 - **Value**—enter the number of consecutive failed attempts to be executed before the scheduled job is stopped.

☐			MaxFailedScheduledJobsCount	4	kcura.IntegrationPoints	No
--------------------------	--	--	------------------------------------	---	-------------------------	----

The integration point's Scheduling tab will display the failed jobs with a Job Type of "Scheduled Run," Job Status of "Error - job failed," Items Transferred of "0," and Total Items based on the number of items in that job. The system will attempt one more run after the configured maximum number of consecutive failed attempts before it stops the scheduled job and the Total Items column will be blank.

Job ID	Start Time (UTC)	Artifact ID	Name	Job Type	Job Status	Destination Worksp...	Items Transferred	Total Items	Items with Errors	System Created By
8	12/5/2022, 2:21 PM	1040715	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
7	12/5/2022, 2:21 PM	1040697	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
6	12/5/2022, 2:20 PM	1040679	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
5	12/5/2022, 2:19 PM	1040661	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity
1	12/5/2022, 2:19 PM	1040643	Automated Stop for Scheduled Jobs	Scheduled Run	Error - job failed	Sample Workspace - 1019265	0	7	0	Service Account, Relativity

The "Next Scheduled Runtime (UTC)" field on the Scheduling tab will be blank, letting you know that job is not scheduled to run again. You will need to correct the error(s) before it will run again as scheduled.



When you go to the Job History page to view the job, you will see the system-generated error description explaining why the scheduled job was stopped.

Job History Error						
Name	Source Unique ID	Job History	Error	Error Status	Error Type	System Created On
Filter	Filter	Filter	Filter	(All) ▾	(All) ▾	(All)
90710540-d664-4e8d-		Automated Stop for...	Scheduled Job reached maximum number of consecutive fails and therefore was stopped by the system. The schedule won't be restored until Integration Point update.	New	Job	



7 Transferring (promoting) data between workspaces

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

You can use Integration Points to transfer, or promote, data from one Relativity workspace to another Relativity workspace. This is as a one-way sync process from a source workspace to a destination workspace. This is not a back and forth syncing process between them.

Once you have tagged documents for inclusion in or exclusion from the data you want to transfer to review, you can access Integration Points to start the job or jobs that will send those documents to the review workspace.

This topic provides details on Integration Points as it is used to transfer data between workspaces. For information, see the Integration Points Guide [Integration Points on page 4](#).

7.1 Considerations

For large data transfer workflows, we recommend configuring integration point jobs into batches. The following suggestions can be used when creating job batches:

- We recommend transferring less than 25GB of *long-text data* to reduce risk of job slowness.
 - The summed long-text size is calculated only from mapped long-text fields.
 - Unmapped long-text fields are not included in the calculation.
 - For more information, see [Calculating integration point job statistics on-demand on page 103](#)
- When using Tag Documents with Job Name option, the job document count should be no more than 500,000.
- When Tag Documents with Job Name is not selected, no limit on document count applies.

- The recommended number of fields to be mapped should not exceed 100. Additionally, it is best to map as few long text fields as possible.
- The following file types cannot be transferred to a Relativity workspace:
 - **Stored/Searchable PDFs**
 - **Native redactions**—the native file will be transferred without redactions.
 - **Produced natives and PDF**—the production flow allows the transfer of images only.

7.2 Exporting to a Relativity workspace

In addition to exporting to a .csv and load file, you have the option of transferring, or exporting, data from a source workspace to a destination workspace in Relativity. This is the most efficient way to move documents from one workspace to another. This process makes it so it does not require you to export and re-import your data.

Complete the following steps to promote data from one workspace to another.

On the Integration Points page:

1. Click **New Integration Point**.
This opens the integration point wizard.
2. Setup the integration point with selecting Relativity as the destination. For more information, see [Setup on the next page](#).
3. Connect your Relativity workspace to another workspace. For more information, see [Connect to Source on page 95](#).
4. Map the source fields to the destination fields. For more information, see [Map Fields on page 96](#).
5. Click **Save**.

After you create an integration point and initiate the export process, you can monitor the job status on the Job History tab and resolve errors on the Job History Errors tab. For more information, see [Monitoring job history and errors on page 105](#).

7.2.1 Considerations

Consider the following when exporting data from a source to a destination workspace using Integration Points:

- You can transfer document objects and non-document object metadata to a destination workspace. The non-document object must already exist in the destination workspace for non-document object metadata to be transferred.
- You can move original images, native documents, or metadata.
- You are not required to have Integration Points installed on the destination workspace.
- The data transfer process supports transfer of non-document objects linked to the Relativity Applications installed in the destination workspace.
 - For example, if you want to push entities object to another workspace, make sure that the proper application is installed there. For example, Legal Hold.
 - You need to have the Relativity Application permission in both the Workspace Security and Object Security sections set to View.

- The export process sorts documents and images by name, which is typically the Control Number.
 - This process takes into account entire names, which means that for names with numbers, it is advised to preserve the number of digits in the names by filling with leading zeros.
 - For example:
 - Test2_1, Test2_2, Test2_10 will be sorted as: Test2_1, Test2_10, Test_2
 - Test2_01, Test2_10, Test2_02 will be sorted as : Test2_01, Test2_02, Test2_10
- When transferred fields have associative objects, these objects need to be transferred first to ensure successful promotion of fields having references to them.
- The data transfer process does not transfer custom objects created by users in a workspace.
- The data transfer process cannot transfer complex objects that have relationships to other objects, such as Search Terms Report (STR), structured analytics sets, and Integration Points profiles, because related objects' ArtifactIDs may be different in the source and destination workspaces.
- When you select the **Copy Images** radio button, the field mapping section is disabled because only the control number is required and available in this scenario. If you want to transfer other field metadata, you must create a new integration point without choosing to copy images.
- Integration Points uses the following delimiters to configure the Import API for the destination workspace. Other delimiters typically configured with the Import API are not utilized:
 - Multi-value delimiter: ASCII 029
 - Nested-value delimiter: ASCII 030

7.2.2 Setup

To create an integration point specifically for exporting a workspace, follow the steps below:

1. Navigate to the **Integration Points** tab.
2. Click **New Integration Point**.

3. Complete the fields in the **Setup** layout. For more information, see [Setup fields below](#).

Setup Complete the Setup

1 2

← Back Next →

General

Name: Integration Point for Transfer

Type: ☐ Import ☒ Export

Source: Relativity

Destination: Relativity

Transferred Object: Document

Profile: Select...

Advanced

Email Notification Recipients: Separate by semi-colon

Log Errors: ☒ Yes ☐ No

Scheduling

Enable Scheduler: ☐ Yes ☒ No

4. Click **Next** to advance to the **Connect to Source** layout.

7.2.2.1 Setup fields

Complete the following fields in the **Setup** layout:

Setup Complete the Setup

1 2

← Back Next →

General

Name: Integration Point for Transfer

Type: ☐ Import ☒ Export

Source: Relativity

Destination: Relativity

Transferred Object: Document

Profile: Select...

Advanced

Email Notification Recipients: Separate by semi-colon

Log Errors: ☒ Yes ☐ No

Scheduling

Enable Scheduler: ☐ Yes ☒ No

- **Name**—the name of your integration for reference purposes.
- **Type**—select **Export** to designate this as an export job. Selecting this sets the Source field to be Relativity.

- **Source**—this is automatically set to **Relativity** since you are exporting data out of a Relativity workspace.
- **Destination**—select **Relativity**.
- **Transferred Object**—select the available Document or non-document object meta data you want to transfer to the destination workspace. The non-document object must already exist in the destination workspace. The data transfer process will not transfer custom objects created by users in a workspace. Refer to the Notes above for additional information.

Note: You will need to create a new integration point for each object type that you want to export to the destination workspace.

- **Profile**—use this to complete the remaining Integration Points settings based on the settings of a saved profile. This includes all of the fields in the **Connect to Source** layout, as well as field mappings. If no profiles exist in the workspace, you do not have the option of selecting them. To apply a profile that you have already created, select it from the drop-down list. For more information on profiles, see [Integration Points profiles on page 11](#).
- **Email Notification Recipients**—enter the email addresses of those who should receive notifications of whether the integration point export succeeded or failed. Use semi colons to separate email addresses.
- **Log Errors**—select **Yes** or **No** to denote whether Relativity tracks item-level errors.
 - If you select **Yes**, each job also logs any item-level errors.
 - If you select **No**, Relativity does not log these item-level errors.
 Regardless of your selection, job-level errors are always recorded in Relativity.
- **Enable Scheduler**—gives you the option of scheduling additional exports. Selecting **Yes** makes the following fields available:
- **Frequency**—the interval at which Relativity runs this integration point.
 - **Daily**—select this option to transfer data once every day.
 - **Weekly**—select this option to transfer data on a weekly basis. You can specify how often in the **Reoccur** field, in which you will provide a number value in the **Every # week(s)** choice. You can then specify on which day of the week the data transfer will take place by checking any of the days of the week listed.
 - **Monthly**—select the day of the month that you want this integration point to transfer data once every month.
 - **Reoccur**—enter the number of month(s) in which this integration point repeatedly transfer data.
 - **Send On:**
 - **Day __ the month**—select the day of the month that you want this integration point to transfer data.
 - **The __ of the Month**—select this option for this integration point to transfer data on the chosen day of every month. For example, "The **Second Friday** of the month."
- **Start Date**—the date that you want Integration Points to start transferring the data.
- **End Date**—(Optional) the date that you want Integration Points to stop transferring the data. Leaving the End Date blank causes the integration point to run indefinitely at the scheduled interval.
- **Scheduled Time**—the time at which this integration point transfers data. This time is local to your PC, not to the server.

7.2.3 Connect to Source

Continue to create your import integration point by connecting Relativity to the data source by following the steps below:

1. Complete the fields in the **Connect to Source** layout. For more information, see [Connect to Source fields below](#).

2. Click **Next** to advance to the **Map Fields** layout.

7.2.3.1 Connect to Source fields

Complete the following fields in the **Connect to Source** layout:

Source—select **Document** as the transferred object during setup, then select **Saved Search** or **Production** from the drop-down list. If you select any other object as the transferred object during setup, this is automatically set to View.

- **Saved Search/Production/View**—depending on the selected Transferred Object, one of the following fields displays:
 - **Saved Search**—select an existing saved search to use from the drop-down list or click the ellipsis button for an alternative way to select a saved search.
 - **Production Set**—select an existing production set to use from the drop-down list.
 - **View**—select an existing view to use from the drop-down list.
- **Destination Workspace**—select an existing workspace to export your saved search or production to.

Note: Relativity will validate whether the selected object is available in the destination workspace and transfer only objects linked to Relativity Applications installed in the destination workspace. If the selected object is not available in the destination workspace, an error message will appear.

- **Location**—select a folder or production set as the destination location.
 - **Folder**—select the drop-down menu to expand the folder structure, locate the folder from which you want to export the data, and select it. This field is only available if you have selected Folder.

Note: When creating an integration point based on a profile, if you change the saved search, folder, or production set on the Setup layout, the fields listed in the Selected Fields window below are not updated to reflect the new source that you selected. If you're not using a profile to creating the integration point, these fields are updated to reflect the newly selected source.

- **Production Set**—select a production set to export the data to. Click the plus sign to create a new production set. For successful operation, transfer Production Set with Append/Overlay mode.
- **Create Saved Search**—select **Yes** to create a saved search in the destination workspace. This saved search's name will take the name given to the integration point. This choice is enabled only if Yes is selected for the Tag Documents with Job Name field.
- **Tag Documents with Job Name**—select one of the following options below. See [Considerations on page 90](#) for document count considerations:
 - **Yes (Source and Destination Workspaces)**—to tag all documents in the scope of the job with a unique ID in both the source and destination workspaces, which allows you to easily identify these documents in both workspaces. This is the default option.
 - **Yes (Destination Workspace Only)**—to tag all documents in the scope of the job with a unique ID in the destination workspace only, which allows you to easily identify these documents in the target workspace.
 - **No**—to not tag documents with a unique ID in either workspace.
 - The following fields are populated when you select **Yes**:
 - **Relativity Destination Case**—the workspace ID where the documents were transferred to.
 - **Relativity Source Case**—the workspace ID where the documents were transferred from.
 - **Relativity Source Job**—Integration Points job Artifact ID that moved the document.

7.2.4 Map Fields

Map the attributes or fields so that Integration Points imports the targeted data into specific Relativity fields by following the steps below:

Setup

Connect to Source

Map Fields

← Back

Save

Please make sure not to overlay the document images with the 'Links Only' option when transferring from the Review workspace back to the Repository workspace. Doing so may cause the original images to be replaced with their links, which were previously sent to the Review workspace, leading to the deletion of the native file and subsequent data loss. For more details please refer to the [Public Documentation](#)

Field Mappings

Map All Fields

Map Saved Search

Source Fields (264):

Type to Filter Fields

Alert [Long Text]
Alias BCC [Multiple Object]
Alias CC [Multiple Object]
Alias Email Bcc Domain [Multiple Object]
Alias Email Cc Domain [Multiple Object]
Alias Email From Domain [Multiple Object]
Alias Email To Domain [Multiple Object]
Alias From [Multiple Object]
Alias Participant [Multiple Object]
Alias Recipient [Multiple Object]
Alias To [Multiple Object]
All Custodians [Multiple Object]
All Custodians (Script) [Long Text]
All Paths/Locations [Long Text]
All Source Locations (Script) [Long Text]
Attachment Document IDs [Long Text]
Attachment List [Long Text]
Attorney Review Comments [Long Text]
Author [Fixed-Length Text(255)]
Bates Beg [Fixed-Length Text(50)]
Bates Beg Attach [Fixed-Length Text(50)]
Bates End [Fixed-Length Text(50)]
Bates End Attach [Fixed-Length Text(50)]
CC (SMTP Address) [Long Text]

>>
>
<
<<

Selected Source Fields (1):

Control Number [Object Identifier]

Selected Destination Fields (1):

Control Number [Object Identifier]

Destination Fields (244):

Type to Filter Fields

All Source Locations (Script) [Long Text]
Attachment Document IDs [Long Text]
Attachment List [Long Text]
Attorney Review Comments [Long Text]
Author [Fixed-Length Text(255)]
Bates Beg [Fixed-Length Text(50)]
Bates Beg Attach [Fixed-Length Text(50)]
Bates End [Fixed-Length Text(50)]
Bates End Attach [Fixed-Length Text(50)]
CC (SMTP Address) [Long Text]
Child MD5 Hash Values [Long Text]
Child SHA1 Hash Values [Long Text]
Child SHA256 Hash Values [Long Text]
Classification Index [Multiple Choice]
Comments [Long Text]
Company [Fixed-Length Text(255)]
Conceptual Index [Multiple Choice]
Confidential [Single Choice]
Container extension [Fixed-Length Text(16)]
Container ID [Fixed-Length Text(255)]
Container name [Fixed-Length Text(255)]
Contains Embedded Files [Yes/No]
Control Number Beg Attach [Fixed-Length Text(50)]
Control Number End Attach [Fixed-Length Text(50)]
Conversation [Long Text]

<<
<
>
>>

Settings

Overwrite:

Append/Overlay

Multi-Select Field Overlay Behavior:

Use Field Settings

Copy Images:

☒ Yes
☐ No

Image Precedence:

Original Images

Copy Files to Repository:

☐ Yes
☒ No

1. Map fields in the **Field Mappings** wizard. For more information, see [Field Mappings below](#).
2. Complete the fields in the **Settings** category. For more information, see [Settings fields on the next page](#).
3. Click **Save** to save this integration point with these export settings.

Note: If you are transferring RSMF (short message) documents, you must map the Family (Group) Identifier field, the Relativity AttachmentID field, and the document_uuid field in addition to the Unique Identifier and Object Identifier. Omitting these fields will cause attachments and embedded images to be transferred but not display correctly in the Short Message Viewer in the destination workspace.

7.2.4.1 Field Mappings

In the **Field Mappings** wizard, you have the following options for mapping fields:

- Use the Shift+click and Ctrl+click method to select multiple fields at a time.
- Use the text search boxes above the Source and Destination lists to find a particular field.
- Use the single and double arrows or double-click a field to move selected fields between columns.
- Use the horizontal scroll bar in each column as needed to fully view long field names.

- Each column displays the total number of fields available in that column.
 - This allows you to quickly compare the number of mapped fields to ensure they match.
 - If they do not match, an error will display when you attempt to save the Integration Point.
- The field names in the Destination column include the type of each field listed.
- Click the **Map All Fields** button between the Source and Destination columns to automatically map all fields with matching names, except single or multiple object fields.
If you have Destination fields that are mapped to Fields in the Field Catalog, Relativity also tries to find name matches between these Catalog Fields.
 - The Field Mappings process excludes certain fields that are used internally by the Integration Points application.
 - The following fields are excluded from the Source and Destination lists:
 - Relativity Source Case
 - Relativity Source Job
 - Relativity Destination Case
 - ErroredDocuments
 - Job History
 - Document.ProcessingFileID.
 - You do not need to map all attributes or fields.
 - Only the *Unique Identifier* and *Object Identifier* are required.
 - The Unique Identifier should contain a value that no other item in the workspace contains.
 - For example, use the GUID or distinguishedName attribute.
 - The Object Identifier is the specific field on the object that holds the displayed identifier, which might not be unique.
 - For example, the Full Name field is the Object Identifier of the Entity RDO but it might not be unique.
 - These two identifier values can be the same.
- Click the **Map Saved Search** button between the Source and Destination columns to automatically map fields that were configured in the Saved Search, which was selected as a data source on the previous screen. If you have Destination fields that are mapped to Fields in the Field Catalog, Relativity also tries to find name matches between these Catalog Fields.

Note: The Map Saved Search functionality only supports searches created with a Keyword Search. Other search conditions, such as dtSearch and Analytics Indexes, are not yet supported for this functionality.

7.2.4.2 Settings fields

Complete the following fields in the **Settings** category:

Setup
Connect to Source
3
Map Fields

← Back
Save

Field Mappings

Map All Fields
Map Saved Search

Source Fields (264):

Type to Filter Fields

- Alert [Long Text]
- Alias BCC [Multiple Object]
- Alias CC [Multiple Object]
- Alias Email Bcc Domain [Multiple Object]
- Alias Email Cc Domain [Multiple Object]
- Alias Email From Domain [Multiple Object]
- Alias Email Recipients Domain [Multiple Object]
- Alias Email To Domain [Multiple Object]
- Alias From [Multiple Object]
- Alias Participant [Multiple Object]
- Alias Recipient [Multiple Object]
- Alias To [Multiple Object]
- All Custodians [Multiple Object]
- All Custodians (Script) [Long Text]
- All Paths/Locations [Long Text]
- All Source Locations (Script) [Long Text]
- Attachment Document IDs [Long Text]
- Attachment List [Long Text]
- Attorney Review Comments [Long Text]
- Author [Fixed-Length Text(255)]
- Bates Beg [Fixed-Length Text(50)]
- Bates Beg Attach [Fixed-Length Text(50)]
- Bates End [Fixed-Length Text(50)]
- Bates End Attach [Fixed-Length Text(50)]
- CC (SMTP Address) [Long Text]

Selected Source Fields (1):

Control Number [Object Identifier]

Selected Destination Fields (1):

Control Number [Object Identifier]

Destination Fields (244):

Type to Filter Fields

- All Source Locations (Script) [Long Text]
- Attachment Document IDs [Long Text]
- Attachment List [Long Text]
- Attorney Review Comments [Long Text]
- Author [Fixed-Length Text(255)]
- Bates Beg [Fixed-Length Text(50)]
- Bates Beg Attach [Fixed-Length Text(50)]
- Bates End [Fixed-Length Text(50)]
- Bates End Attach [Fixed-Length Text(50)]
- CC (SMTP Address) [Long Text]
- Child MD5 Hash Values [Long Text]
- Child SHA1 Hash Values [Long Text]
- Child SHA256 Hash Values [Long Text]
- Classification Index [Multiple Choice]
- Comments [Long Text]
- Company [Fixed-Length Text(255)]
- Conceptual Index [Multiple Choice]
- Confidential [Single Choice]
- Container extension [Fixed-Length Text(16)]
- Container ID [Fixed-Length Text(255)]
- Container name [Fixed-Length Text(255)]
- Contains Embedded Files [Yes/No]
- Control Number Beg Attach [Fixed-Length Text(50)]
- Control Number End Attach [Fixed-Length Text(50)]
- Conversation [Long Text]

Settings

Overwrite: Append/Overlay

Multi-Select Field Overlay Behavior: Use Field Settings

Copy Images: ☐ Yes ☒ No

Copy Native Files: ☐ Physical files ☐ Links Only ☒ No

Use Folder Path Information: No

- **Overwrite**—determines how the system overwrites records once you transfer data to the review workspace.
 - **Append Only**—transfer only new records into the review workspace.
 - **Overlay Only**—update existing records only in the review workspace. Any documents with the same workspace identifier are overlaid. When you select this option, you must complete the Multi-Select Field Overlay Behavior field described below.
 - **Append/Overlay**—adds new records to the review workspace and overlays data on existing records. When you select this option, you must complete the Multi-Select Field Overlay Behavior field described below.
- **Multi-Select Field Overlay Behavior**—determines how the system will overlay records when you push documents to the review workspace. This field is only available if you've selected either Overlay Only or Append/Overlay above. This field provides the following choices:
 - **Merge Values**—merges all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.
 - **Replace Values**—replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace, regardless of the overlay behavior settings in the environment.

- **Use Field Settings**—merges or replaces all values for multi-choice and multi-object fields in the source data with corresponding multi-choice and multi-option fields in the workspace according to the overlay behavior settings in the environment.
- **Copy Images**—determine whether you want to copy images to the destination workspace:
 - **Yes**—click if you want to copy images to your destination workspace. Then select options in the *Image Precedence* and *Copy Files to Repository* fields.
 - When you click **Yes** to copy images, it removes the option to include natives in your job.
 - To get transfer images and natives to your other workspace, you must run two separate Integration points.
 - The first job where you select images.
 - The second job where you select natives. The second job you will just need to select Append/Overlay.
 - **No**—click if you do not want to copy images to the destination workspace. Then select options in Copy Native Files and Use Folder Path Information fields.
- **Image Precedence**—this field appears when Yes is selected for Copy Images. Select **Original Images** or **Produced Images** to copy to the destination workspace.
- **Copy Files to Repository**—determine if you want to copy physical image files to the destination workspace:
 - **Yes**—click if you want to copy physical image files to the destination workspace.
 - **No**—click if you want to add reference links in the destination workspace directing to images located in the source workspace. Links to the images will be accessible in the destination workspace Viewer.
- **Production Precedence**—this field displays when Produced Images is selected for Image Precedence. Use the pop-up screen to select and order the productions, and click *OK* on the screen to save.
- **Include Original Images If Not Produced**—this field displays when Produced Images is selected for Image Precedence. Select this checkbox to include the original image.
- **Copy Native Files**—if No was selected for Copy Images, determine how to copy native files to the destination workspaces by selecting one of these radio buttons:
 - **Physical files**—select to copy any physical native files from the source workspace to the destination workspace.
 - **Links Only**—select to add only reference links in the destination workspace that direct back to the source workspace documents.


Note: Do not use the *Links Only* option to overlay documents going from a review workspace to a repository workspace. This can replace the original file with just a link, causing data loss.

- No physical files will be copied to the destination workspace but native files will be accessible in the destination workspace Viewer.
- When transferring documents from a repository to a review workspace using *Links Only*:
 - Links in the review workspace will break if you delete the original files or delete or archive the repository workspace.
- To avoid losing files: Before deleting or archiving the repository workspace, copy the actual files, not just links, to the review workspace first.

Note: Be aware that when a non-administrator user copies native files by selecting the Links Only option, the System Created by column on the Job History tab will list the system administrator's name instead of the non-administrator user's name.

- **No**—select to not create additional copies of your native files.
 - No physical native files or links will be pushed to the destination workspace.
 - You will not be able to look at native files in the Viewer.
 - Only metadata, such as extracted text or coding decisions, will be pushed. For example, if you have a document with native files and coding decisions, and you select the No option, only metadata, the coding decisions, will be transferred to the destination workspace. Refer to additional notes below regarding this choice:
 - Doing this maintains a single copy of that data file no matter how many times you use the document in your workspace.
 - You have the option of selecting No for an initial run of an integration point and then Yes for a subsequent run. Doing this saves you time on the initial job while then retaining copies of the native files on the final job.
 - The benefit of selecting No for this field is that you save on storage and speed.
- **Use Folder Path Information**—use a metadata field to build the folder structure for the documents that you transfer to the review workspace.
 - **No**—select if you do not want to build a folder structure based on metadata. In this case, Relativity loads all documents directly into the folder indicated by the transfer destination, and you create no new folders in the destination workspace.
 - **Read From Field** or **Read From Folder Tree**—select to use a metadata field to build the folder structure for the documents that you transfer to the review workspace.
 - **Folder Path Information**—specify a metadata field to build the folder structure for the documents that you transfer to the review workspace.
 - You have the option of creating folders or re-folding documents when you select Append/Overlay for the Overwrite field.
 - You have the option of re-folding documents for the Overwrite field through the Move Existing Documents field.
- **Move Existing Documents**—re-folder documents that were previously imported into the destination workspace, but were only placed in the root case folder and not to any subfolders. This field is useful for situations in which you want to add new data to the destination workspace while overlaying existing data.
 - Select **No** if you don't want to re-folder existing documents.
 - Select **Yes** to move existing documents into the folders provided in the Folder Path Information field. For example, you previously imported custodian Sally Smith's files into the destination workspace's root folder. Now, in addition to placing the documents from the saved search specified in this integration point in their subfolder, you also want to move those previously migrated documents into Sally Smith's subfolder, so you would select Yes.

During the mapping process, Relativity validates whether the selected objects are available in the destination workspace in the final step of the wizard. When fields cannot be mapped from the Source to the Destination, a pop-up modal displays them. You can either choose to keep the fields in the Source column or skip them and remove them.

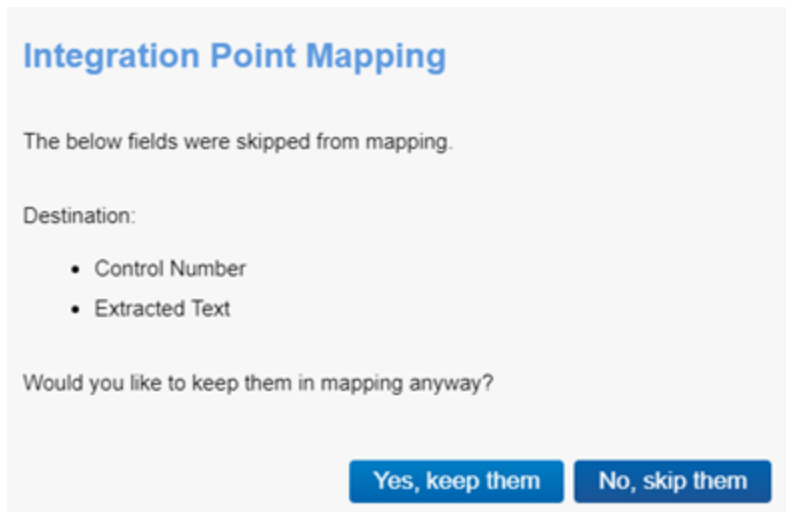A screenshot of a web interface titled "Integration Point Mapping". The text inside says "The below fields were skipped from mapping." followed by "Destination:". Below this is a bulleted list: "Control Number" and "Extracted Text". Then it asks "Would you like to keep them in mapping anyway?". At the bottom are two buttons: "Yes, keep them" and "No, skip them".

Integration Point Mapping

The below fields were skipped from mapping.

Destination:

- Control Number
- Extracted Text

Would you like to keep them in mapping anyway?

Yes, keep them **No, skip them**

Another solution that Integration Points data transfer provides is automatically remapping fields when the destination workspace is changed. When you change the destination workspace in either the integration point or integration point profile, fields can vary between the source and destination workspace. When the destination workspace is changed, the new fields in the workspace are automatically mapped.

The artifacts are mapped based on their names only if the ArtifactIDs are different in the new destination workspace. They are mapped so that the integration points job will not fail. This means that if the source workspace fields cannot match to the new destination workspace fields, those unmatched fields are presented at the end of the mappings list for easy identification. Relativity also informs the you that the original source fields from the profile were mapped with corresponding fields from the destination workspace. The message will be similar to this, "We restored the fields mapping as destination workspace has changed."

After you create an integration point and initiate the export process, you can monitor the job status on the Job History tab and resolve errors on the Job History Errors tab. For more information, see [Monitoring job history and errors on page 105](#).

If you map more than 100 fields, a warning banner appears on the Map Fields page.

- This is not a hard limit. You can still run the job.
- Jobs with more than 100 mapped fields may take longer to complete.
- Avoid slowness by splitting the job into smaller batches with fewer mapped fields.

7.3 Mapping saved searches

The **Map Saved Searches** button automatically maps the fields from the saved search. It also maps the object identifier fields, even when such field is not selected in the saved search. If any unsupported fields are manually mapped, clicking the **Save** button displays a pop-up modal stating that the job might fail.

Once Relativity saves the integration point, you will be able to run it and export the data based on the settings you specified. See [Running the export job on page 85](#) for details.

7.4 Working with transferred documents

To view the documents you transferred to the destination workspace, for which Tag Documents with Job Name option was enabled:

1. Navigate to the destination workspace.
2. Click the **Documents** tab and make sure you are on the **Folders** browser.

3. Note the following fields on Documents view (if these fields are not yet added to the view, edit it and add them in the **Fields** tab):
 - **Relativity Source Case**—the name of the workspace from which the tagged documents were transferred to the destination workspace.
 - **Relativity Source Job**—the name of the Integration Point job that you used to transfer the tagged documents to the destination workspace.
4. If option Create Saved Search had been selected for the transferred documents, you can also view them in the created saved search. To do so:
 - A. Navigate to the **Saved Search** browser.
 - B. Locate Integration Points folder and expand it.
 - C. Click on the saved search with the name of the Integration Point job that transferred the documents.

You can now review these documents and apply coding decisions for responsiveness and/or issues designation.

7.4.1 Reusing coding decisions

You can re-use the coding decisions you made on reviewed documents and transfer them back into the source workspace through another Integration Point. For example, you could run another transfer job to conduct a privilege overlay on documents in the source workspace.

To do this, follow the steps below:

1. Select the saved search you created to transfer documents back to the source workspace.
2. Navigate to the **Integration Points** tab.
3. Create a new integration point that specifies the following values, which differ from those you entered for the transfer job you ran previously:
 - **Destination Workspace**—select the original source workspace, specifically the workspace from which you previously transferred documents to the review workspace.
 - **Saved Search**—select the saved search you created to transfer documents back to the source workspace.
 - **Field Mappings**—map only **Control Number (Object Identifier)** and **Privilege Designation**.
 - **Overwrite**—select **Overlay Only**.
4. Click **Run**.

7.5 Calculating integration point job statistics on-demand

You can calculate the number of documents, as well as images and natives if applicable, to be transferred in the scope of a particular Integration Point.

1. Navigate to the **General** tab of **Integration Points > Integration Points Details** for a particular integration point job.

Integration Points Job History Job History Errors Destination Workspaces Integration Point Profile

Integration Point Details [Edit](#) [Delete](#) [Back](#) [Edit Permissions](#) [View Audit](#)

General Scheduling

Name	Stats calculation on demand	Log Errors	Yes
Overwrite	Append/Overlay	Has Errors	No
Export Type	Workspace;	Email Notification Recipients	
Source Details	Saved Search: Extracted Text Only		
Source Workspace	A7 source	Total of Documents	Press 'Calculate statistics' button
Source Relativity Instance	This instance(emrtest)	Create Saved Search	No
Transferred Object	Document		
Destination Workspace	A7 destination		
Destination Folder	A7 destination		
Multi Select Overlay	Use Field Settings		
Use Folder Path Info	No		
Move Existing Docs	No		

Status 0 - 0 of 0 per page

Job ID	Start Time (UTC)	Artifact ID	Name	Job Type	Job Status	Destination Worksp...	It...
Filter	(All)	Filter	Filter	(All)	(All)	Filter	

Note: Before the first calculation for this integration point, you will see the "Press 'Calculate statistics' button" message in the Total of Documents field.

Log Errors Yes

Has Errors No


Email Notification Recipients

Total of Documents Press 'Calculate statistics' button

Create Saved Search No

Tag Documents Yes (Source and Destination Workspaces)

- Click the **Calculate statistics** button under Transfer Options in the right-hand panel.
 - If your job includes more than 500,000 documents or more than 25 GB of extracted text across mapped fields, a warning banner appears after the calculation runs.
 - Jobs that exceed these thresholds may take longer to complete. Split the job into smaller batches before running to reduce job time.

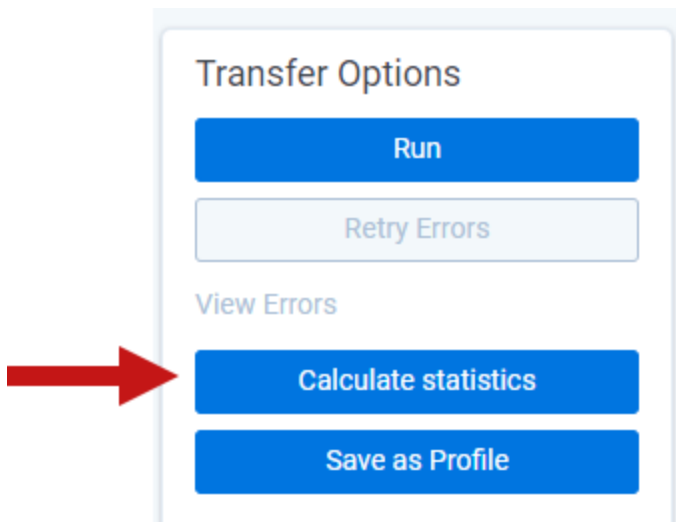

A message box displays indicating that this action will launch the calculation of Saved Search or Production content, depending on the chosen Integration Point, and that this operation can be time consuming, depending on the size of the content. The statistics calculation will run in the background so you can still use other Transfer Options or leave this page and return to it for the results later.

Calculation results appear on the details page and depend on Integration Point content.

- The total number of documents with a date and time mark of the last calculation will display.
- Depending on the transferred content, the total number and size of images or natives may also display.

Total of Documents 25

Calculated on: 12/19/2022 16:18 UTC

Total of Natives 25 (2.56 MB)

8 Monitoring job history and errors

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

After you create an integration point and initiate the import process, you can monitor the job status on the Job History tab and resolve errors on the Job History Errors tab.

8.1 Job History

This tab lists an entry for each integration point job, and also provides you with the ability to view additional details for a specific job.

#	Job ID	Start Time (UTC)	Artifact ID	Name	Integration Point	Job Type	Job Status	Destination Workspace	Destination Instance	Items Read	Items Transferred	Total Items	Items with Errors
1	11	02/27/2023 8:21 PM	1040534	AD_tagging_SavedSearch	AD_tagging_SavedSearch	Run	Completed	AD_Test - 1019496	This Instance	26	26	26	0
2	14	02/27/2023 8:25 PM	1040539	TAGGING wknd	TAGGING wknd	Run	Completed	Destiny - 1019497	This Instance	26	26	26	0
3	19	02/27/2023 8:44 PM	1040561	TAGGING wknd	TAGGING wknd	Run	Completed	Destiny - 1019497	This Instance	26	26	26	0
4	6	02/27/2023 8:16 PM	1040716	AD_test_scheduler	AD_test_scheduler	Scheduled Run	Completed	New Case Template - 1014823	This Instance	26	26	26	0

The Job History tab lists the following information that you can use to monitor the status of an integration point job:

- **Start Time (UTC)**—the date and time that a job started running in Coordinated Universal Time (UTC).
- **Artifact ID**—the artifact ID of the workspace.
- **Name**—the name for a specific job run by the integration point.
- **Integration Point**—the name of the integration point used to run the job.
- **Job Status**—the current status of an integration point job. The following job statuses are available:
 - **[blank]**—the job has not started or was not run.
 - **Pending**—the job has been submitted but has not started yet.
 - In some cases, a job may remain in Pending if a batch did not complete as expected.
 - When this happens, Integration Points detects the incomplete batch and moves the job to Error status so you can retry it on your own.
 - **Suspending**—the system is performing the application update. The job prepares for being suspended, completing the current task.
 - **Suspended**—the system is performing the application update. The job has been suspended, and waits for the Integration Points agent to pick it up.
 - **Validation**—an agent is validating the job to make sure it has the required settings, such as access to the source and destination objects (saved searches, workspaces, etc.). If validation fails, the status changes to "Validation failed," and Relativity logs an error. If the validation succeeds, the job moves on to a status of "Processing."
 - **Validation failed**—the job validation has failed, resulting in an error, the details of which are saved in the Job History Errors tab.
 - **Processing**—the job is currently running.
 - **Error - Job Failed**—a job-level error occurred and the import was not completed. The integration point may have been able to import some of the records before the error occurred.
 - **Completed with Errors**—the import job completed but at least one item-level error occurred. If you set the Log Errors field to Yes for the integration point, you can view the item-level errors in the section called Job History Errors on the Job Details layout. See [Viewing job history details on the next page](#).

Notes: When transferring custodians and associating them to managers, errors can occur. If transferring custodians and the manager is not associated with a custodian, the custodian transfer is completed successfully. It will show up as Completed with Errors even though the Items Transferred field and Total Items field will match, while the Items with Errors field states zero errors. This is because the custodian has been imported correctly, but the manager was not associated correctly.

- **Completed**—the import job completed without any item-level errors.
- **Destination Workspace**—the workspace specified as the destination for the transferred files.
- **Items Read**—the number of records successfully read from the job source and passed for transferring.

- **Items Transferred**—the number of records successfully transferred when the job ran.
- **Total Items**—the total number of items originally designated to be transferred, including those that ended up having errors.
- **Items Skipped**—the number of records skipped when the job ran.
 - Items skipped count depends on your Overwrite field selection:
 - **Append Only**—documents that already exist in the destination are skipped and counted.
 - **Overlay Only**—documents that do not already exist in the destination are skipped and counted.
- **Items with Errors**—the number of records that the integration point failed to import due to item-level errors.
- **System Last Modified On**—displays the date and time that Relativity last modified the integration point job.

8.1.1 Viewing job history details

To view additional history information, click the name of a specific job listed on the Job History tab. The Job Details layout displays basic job information, import statistics, and a detailed list of errors.

The Job History Error section always logs job-level errors. If you set the Log Errors field to Yes, then it also logs item-level errors. For more information on setting the Log Errors field, see [Importing data through Integration Points on page 17](#).

Integration Points
Job History
Job History Errors
Destination Workspaces
Integration Point Profile

Job Details
Edit
Back
Edit Permissions
View Audit
1 of 25

Job Details

Job ID

83230

Workflow ID

de4392f9-8325-472e-8e27-d490fab13a72

Name

AAD 09152025

Integration Point

AAD 09152025

Job Type

Run

Status

Completed with errors

Start Time (UTC)

5/7/2026 2:02 AM

End Time (UTC)

5/7/2026 2:03 AM

System Last Modified On

5/6/2026 7:03:02 PM MST

Import Statistics

Items Transferred

18

Items with Errors

192

Items Skipped

0

Job History Error

1
- 10 of 192
10
per page

Name	Source Unique ID	Job History	Error	Error Status	Error Type	System Created On
9c2ecece-acc7-4630-	5b7dca00-5136-4ee1-bc74-df8cf02f2861	AAD 09152025	IAP1 - An item with identifier 5b7dca00-5136-4ee1-bc74-df8cf02f2861 already exists in the workspace	New	Item	5/6/2026, 7:03 PM MST
342c4218-70b4-497f-	fc949003-c28d-4e15-b537-8dc1aca18ec3	AAD 09152025	IAP1 - An item with identifier fc949003-c28d-4e15-b537-8dc1aca18ec3 already exists in the workspace	New	Item	5/6/2026, 7:03 PM MST
5b731e79-bf7a-4d22-	406d6005-9c1f-42e9-8f80-5a7e93eca12e	AAD 09152025	IAP1 - An item with identifier 406d6005-9c1f-42e9-8f80-5a7e93eca12e already exists in the workspace	New	Item	5/6/2026, 7:03 PM MST
2a88ff76-ea4e-468c-	891f1506-af84-47ed-a84b-62255546fc0e	AAD 09152025	IAP1 - An item with identifier 891f1506-af84-47ed-a84b-62255546fc0e already exists in the workspace	New	Item	5/6/2026, 7:03 PM MST

The Job Details layout includes many of the same fields displayed on the Job History tab. The following list includes the additional fields displayed in this layout:

- **End Time (UTC)**—the date and time that a job completed in UTC.
- **Source Unique ID**—the unique identifier for the record in the source that caused an error.
- **Error**—a brief description of the error that occurred.
- **Timestamp**—the date and time that a job error occurred in UTC.

- **Error Type**—indicates whether the error occurred at the job or item level.
- **System Created On**—the date and time at which the error was created by the agent during the integration point job.

8.2 Job History Errors

In the Job History Errors tab, you can use the condition lists at the top of the view to find errors based on any error-related metadata fields, such as Artifact ID, Error, Error Status, Error Type, JobHistory, Name, Source Unique ID, Stack Trace, System Created By, System Created On, System Last Modified On, and Timestamp (UTC).

#	Name	Source Unique ID	Job History	Error	Error Status	Error Type	System Created On
1	2b63dce2-1369-44b4-...		Operation 3 - Import by ...	IAP1 Identity value not set	New	Item	09/25/2019 5:28 AM MST
2	242b9561-2ea8-46f0-...		Operation 3 - Import by ...	IAP1 Identity value not set	New	Item	09/25/2019 5:28 AM MST
3	4299edfa-9a4f-4138-a...		Operation 3 - Import by ...	IAP1 Identity value not set	New	Item	09/25/2019 5:28 AM MST
4	b12bcf44-7bbc-4fa1-a...		Operation 3 - Import by ...	IAP1 Identity value not set	New	Item	09/25/2019 5:28 AM MST

Once you specify your conditions, you can search for the targeted errors by clicking **Search** on the right side of the condition lists.

You can then open any of the individuals errors returned in the list by clicking the **Name** value.

Error Details	
Name	9c2ecece-acc7-4630-97ef-b5556b42c864
Source Unique ID	5b7dca00-5136-4ee1-bc74-df8cf02f2861
Job History	AAD 09152025
Error	IAP1 - An item with identifier 5b7dca00-5136-4ee1-bc74-df8cf02f2861 already exists in the workspace
Error Status	New
Error Type	Item
Full Error	IAP1 - An item with identifier 5b7dca00-5136-4ee1-bc74-df8cf02f2861 already exists in the workspace
System Created On	5/6/2026 7:03:00 PM MST
System Created By	Service Account, Relativity
System Last Modified By	Service Account, Relativity

The Job History Error Layout provides the following fields:

- **Name**—the system-generated name of the error.
- **Source Unique ID**—the identifier of the item in which the error occurred.
- **Job History**—the name of the integration point containing the file in which the error occurred.

- **Job Status Description**—a plain-language description of what the job is currently doing.
 - This field updates as the job progresses.
 - This field can help you confirm the job is still running without opening a support ticket.
 - For more information on statuses, see [Status and description reference below](#).
- **Error**—the error message.
- **Error Status**—the current state of the error. You'll see any of the following values for the status field:
 - **New**—the error is new and no action has been taken on it yet.
 - **Expired**—the state assigned to an item level error in either of the following scenarios:
 - You received an item-level error on a job, you did not retry the error, and the job ran on a schedule, meaning the Enable Scheduler field is set to Yes on the integration point.
 - You received an item-level or a job-level error, you didn't retry the error, and you click Run Now on the integration point, or it is a scheduled job.
 - **In Progress**—the error is currently in the process of being retried.
 - **Retried**—the item level error in a job has been retried, meaning you clicked Retry Errors on the integration point and the retry job is complete.
- **Error Type**—an indicator of whether the error is item or job-level.
- **Full Error**—the error message with details, including a stack trace of the error, when available.
- **System Created On**—the date and time at which the error was created by the agent during the integration point job.
- **System Created By**—the agent that created the error during the integration point job.
- **System Last Modified By**—the agent that last updated the status value of the error.
- **System Last Modified On**—a timestamp that updates automatically as the job runs.
 - If this timestamp stops updating, the job may have stalled.
 - Use this field alongside Job Status Description to check on job progress.

With the information provided in the Job History Errors Layout, you can identify those files on which errors occurred. You can then access those files to manually address the causes of those errors. From there, you can return to the integration points console and retry the errors.

8.2.1 Status and description reference

The *Job Status Description* field displays a plain-language message about what the job is currently doing. During transfer, the field also shows batch progress and refreshes approximately every 30 seconds. When a job finishes with errors, the message directs you to *Retry Errors*.

The following table lists the possible job status descriptions:

Job status	Description
Validating	Checking workspace availability.
	Verifying user permissions.
	Validating field mappings and job settings.
Validation Failed	Fix the errors in Job History and re-run.

Job status	Description
Processing	Setting up destination object types.
	Building document list from saved search.
	Preparing workspace tags and initializing transfer.
	Creating destination saved search.
	Splitting documents into transfer batches.
	Configuring import settings.
	Generating load files. Transfer starts when ready.
	Transferring items. {0} of {1} batches prepared.
	Transferring items to destination.
	Transferring items. {0} of {1} batches complete.
	Transferring images to destination.
	Building object list from saved search.
	Transferring objects to destination.
	Linking transferred objects.
Completed	{0} items transferred successfully.
	{0} items transferred successfully. {1} items skipped.
	All items transferred successfully.
Completed with Errors	{0} of {1} items failed. Use Retry Errors.
	{0} items transferred successfully. {1} items skipped.

8.2.2 Item-level errors versus job-level errors

Note the following differences in the way Relativity handles item-level and job-level errors.

Relativity handles a mix of item-level and job-level errors in the following way:

- When you click **Run** on an integration point that contains item- and job-level errors, the entire job is re-run.
- When you click **Retry Errors** on an integration point that contains item- and job-level errors, the entire job is re-run.

Relativity handles item-level errors in the following way:

- When you click **Run**, the entire job is re-run.
- When you click **Retry Errors**, a retry job starts, including only those documents that caused errors.

Relativity handles job-level errors in the following way:

- It registers only one job-level error for an integration point.
- When you click **Run**, the entire job is re-run.
- The **Retry Errors** button is not available.

Clicking the **Retry Errors** button starts a new job only for documents that caused errors in the previous run. If you edit an integration point settings before running the retry job, they will be applied to the retry job (except data source changes).

You can change, for example, Fields Mapping or Overwrite settings to allow the documents that caused errors to be transferred successfully.

Note: When you run Retry Errors for a job configured to copy physical files like natives or images in Append mode, the retry job mode is automatically set to Append/Overlay. This intended behavior is to ensure consistency between copied metadata and native and image files. It may happen that during a job that has failed, only part of a given document (either metadata or files) has been transferred successfully. In such case, Append/Overlay mode allows transferring all the document data. If you want to have the documents that caused errors transferred in other mode, you need to edit the integration point before running the Retry Errors job.

8.3 Troubleshooting job history errors

Relativity provides informative and actionable error messages when you attempt to save and run an integration point in any of the following situations:

Integration Point Details

EditDeleteBackEdit PermissionsView Audit

Record 2 of 2

Failed to submit integration job. Integration Point validation failed. 20.005 Destination field(s) mapped may no longer be available or has been renamed. Review the mapping for the following field(s): 'Date Last Modified'.

General

Scheduling

Name: Bluth Review Data

Export Type: Workspace;

Source Details: Saved Search: All Documents

Source Workspace: Bluth Corp vs. Weyland Inc

Transferred Object: Document

Destination Workspace: Bluth Corp Review Data

Destination Folder: Bluth Corp Review Data

Overwrite: Append Only

Multi-Select Overlay: Use Field Settings

Use Folder Path Info: No

Move Existing Docs: No

Log Errors: Yes

Has Errors: Yes

Email Notification Recipients:

Included in ECA Promote List: No

Total of Documents: 5

Create Saved Search: No

TRANSFER OPTIONS

Run

Retry Errors

View Errors

Save as a Profile

- The destination workspace is missing.
- The destination field is missing.
- You do not have permissions to a saved search, production, or destination workspace.
- The destination field has missing child object data.
- The production is missing from the destination workspace.

The following table provides some of the errors you could encounter when attempting to run an Integration Points job, along with information on how to resolve them:

Error	Likely resolution
Destination field(s) mapped has different type. Review the mapping for the following field(s): field_1, field_2	Review the fields listed in the error message, and check if you have the same type as expected. If the reason for changing the type was to delete the file and re-create it, then it will be un-mapped. Correct the mapping saved in the Integration Point job, and run the job again.
Destination field(s) mapped may no longer be available or has been renamed. Review the mapping for	Review if the failing field(s) still exist in the destination workspace, correct the mapping saved in the Integration Point job,

Relativity aiR

RelativityaiR Integration Points Guide

112

Error	Likely resolution
the following field(s) [field name].	and run the job again.
Destination workspace is not available.	Verify if destination workspace exists.
Failed to copy source field into destination field due to missing child object. Review the following destination field(s): [field names]	Review the list of failing fields, create the child/parent relation in the destination workspace as it is in the source workspace and try again.
Saved search is not available or has been secured from this user. Contact your system administrator.	Verify that you have the required permissions for the saved search, or check to see if the saved search has been deleted. If needed, contact your system administrator to verify the saved search configuration.
User does not have sufficient permissions to access destination workspace. Contact your system administrator.	Confirm that you still have access to the destination workspace. It is also required that a System Admin account is present (used by an Integration Points Agent) and has access to the destination workspace.
Verify if a folder in destination workspace selected in the Integration Point exists or if a user has a proper permission to access it.	Verify that the folder used for the integration point still exists. Also, check the permission settings for the folders in destination workspace to confirm that it's not secured for the user's group.
Verify if a Production Set used as the location in destination workspace exists or if a user has a proper permission to access it.	Verify that the production set used as the location in the destination workspace still exists. Also, check the permission settings for productions in the destination workspace to confirm that it's not secured for the user's group.
Verify if a Production Set used as the location in destination workspace is in New status.	Verify that the production set used as the location in the destination workspace still has a status of New. Only productions with a status of New can be used as a production set in an integration point. If the production set was already staged or run, it isn't eligible to be used for the integration point.
Verify if production, which is the data source of this Integration Point, still exist or if user has required permissions for it.	Check to see if the production used as the data source of the integration point still exists. Also, verify that you have the required permissions for the production used as the data source. If needed, contact your system administrator to verify your production permissions.
Verify if the user still has permission to create saved search on destination workspace.	Verify that you have the required permissions for creating a saved search in the destination workspace for this integrated point job. If needed, contact your system administrator to verify your production permissions. One of missing permissions could be Search in Object Security and Advanced & Saved Searches in Other Settings, both of which are set in the group permission on destination workspace.
Data was transferred successfully, but even though the RSMF document transfer was successful, the RSMF message-level metadata transfer operation did not complete successfully. This may only affect RSMF Short Message Search and Message-level Coding search, but the primary sync operation was successful unless otherwise specified.	In this situation, the document transfer completed successfully, or partially successfully, but the RSMF metadata indexing for searching and coding failed. To resolve this, rerun the same job as an append/overlay job.

Error	Likely resolution
The maximum length of the {field_name} field is currently set to 255 characters, but the records metadata's length is 450 characters.	Increase the maximum length of the {field_name} field to a higher number of characters and retry.
The job timed out, often because of document volume or a heavy field mapping.	Reduce documents and simplify mapped fields, then retry. Reduce the number of fields mapped or number of documents being transferred in job, then retry integration point.
Job is stuck in Pending status and does not progress.	Integration Points detects incomplete batches and moves the job to Error status automatically. Once the status changes to Error, click Retry Errors to run the job again. If the status does not change, contact your system administrator.

9 Viewing destination workspaces

Note: We've streamlined our Staging boundaries to more effectively separate staging data from workspace and system data. With this change, you can no longer write to or access data outside of the four defined staging area folders. The four defined staging area folders: *ARM*, *ProcessingSource*, *StructuredData*, and *TenantVM*. Folders removed in the update include *FTA*, *Temp*, *Export*, and *dtSearch*. In addition to any other folders you manually created. Refer to the [Staging Area FAQ](#) in Community for more details.

You can go to the Destination Workspace tab to view all of the workspaces that are designated as destinations for documents that you push through integration points.

#	Name	Destination Instance ...	Destination Instance...	Destination Workspac...	Destination Workspac...	Job History
1	This Instance - Docum...	This Instance	-1	Documentation [DO NOT DELETE]	3726327	Documentation

The default All Destination Workspaces view provides the following fields:

- **Name**—the name given to the workspace, plus the artifact ID of the actual destination workspace.
- **Destination Workspace Name**—the name given to the destination workspace.
- **Destination Workspace Artifact ID**—the identifier of the destination workspace.
- **Job History**—a list of all the Job History entries associated with the destination workspace.

An individual destination workspace layout provides the following information in the associated **Document (Relativity Destination Case)** view.

Destination Workspace Layout
Edit
Back
Edit Permissions
View Audit
Record 1 of 1

Destination Workspace
Name: This Instance - Documentation [DO NOT DELETE] - 3726327

Only the first 1000 of 2496 items displayed.

Document (Relativity Destination Case)
Link
Unlink
Items 1 - 10 (of 1,000)

	Artifact ID	Control Number	Relativity Destination Case	Job History
(All)	(All)	(All)	Select...	Select...
☐ Edit	1120328	AZIPPER_0007299	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120329	AZIPPER_0007300	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120333	AZIPPER_0007746	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120334	AZIPPER_0007747	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120335	AZIPPER_0007748	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120336	AZIPPER_0007749	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120337	AZIPPER_0007773	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120338	AZIPPER_0008358	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120339	AZIPPER_0008559	This Instance - Documentation [DO NOT DI Documentation	
☐ Edit	1120340	AZIPPER_0008560	This Instance - Documentation [DO NOT DI Documentation	

0 Selected Item(s)
Select Page Size: 10

- **ArtifactID**—the identifier of the document.
- **Control Number**—the control number of the document.
- **Relativity Destination Case**—a list of all the destination workspaces in which the document can be found.
- **Job History**—a list of audited actions associated with the document.

10 Microsoft Entra ID provider

Note: Microsoft has renamed Azure Active Directory (Azure AD) to Microsoft Entra ID. This site has been updated to reflect the name change, where applicable. Refer to [Microsoft documentation](#) for more information.

You can import Entity (Employee/Custodian) data from Microsoft Entra ID, formerly known as Azure Active Directory, through Integration Points.

Before you begin, complete the following prerequisites:

In Relativity:

- Install Integration Points into your workspace. See [Installing Integration Points](#) for details.
- Install the RIP AAD Provider application from the application library.
 - This adds Microsoft Entra ID as a source within Integration Points.
 - For more information, see Relativity applications documentation.

Completing these two installations adds Integration Points to your workspace and adds Microsoft Entra ID as a source within Integration Points.

In Microsoft Azure:

- Set up an application in Microsoft Azure to configure an Integration Point in Relativity.
 - Only an Application Administrator with access can create an application, find credentials, and delete an application.
 - If you do not have permissions, contact your admin.
 - For more information on Application Administrators, see Microsoft's documentation.

Once you complete the prerequisites, import Microsoft Entra ID into Relativity. For more information, see [Importing from Microsoft Entra ID on page 42](#).

Note: This documentation contains references to third-party software, or technologies. While efforts are made to keep third-party references updated, the images, documentation, or guidance in this topic may not accurately represent the current behavior or user interfaces of the third-party software. For more considerations regarding third-party software, such as copyright and ownership, see [Terms of Use](#).

10.1 Registering an Azure application and credentials

To create your application ID and secret, you must have Application Administrator privileges to log into your Azure Portal and register an app.

Start with registering your application in the Azure portal by following the steps below.

Caution: The listed permissions and roles are required and supported by Relativity.

- Relativity does not support substitutions or reduced permissions.
 - You can submit requests for alternative or reduced permissions as product feedback.
-

For more information on registering an application in the Azure portal, refer to documentation on Microsoft's site.

Note: These steps must be completed by a Microsoft 365 administrator.

1. Open your [Azure Portal](#).
2. Click **Microsoft Entra ID** (formerly known as Azure Active Directory).
3. Click **App registrations**.
4. Click **New Registration** to display the Register an application page.
5. Enter an application name in the **Name** field.
6. Accept the default setting, **Accounts in this organizational directory only**, as the supported account type.
7. Click **Register**.
8. Once the application is registered, make note of the **Application (client) ID** and **Directory (tenant) ID** for use later when configuring the data source in Relativity aiR Collect.

Next, from the app's page, add permissions to the web API by following the steps below:

1. Click **API Permissions**.
2. Click **Add a permission**.
3. Click **Microsoft Graph**.
4. Select **Application Permissions**.

5. Select the following options from the Application Permissions section:

- Directory – **Directory.Read.All**
- Group – **Group.Read.All**
- User – **User.Read.All**

Note: This permission is required if Filter by Group functionality is used.

6. Click **Add Permission**.

7. Click **Grant Permission**.

Finally, grant Admin consent for the API by following the steps below:


1. Click the **API Permissions** tab.
2. Click **Grant admin consent for [tenant]**.
3. In the pop-up window, click **Accept**.

10.2 Finding Azure credentials

If an application is already created and you need to find the application information to complete the Source Connection step, follow the steps below in the Azure Portal. For more information, see relevant Microsoft documentation on the Microsoft site.

1. Open your [Azure Portal](#).
2. Click **Microsoft Entra ID** (formerly known as Azure Active Directory).
3. Navigate to **Enterprise applications**.
4. In the list of applications, locate and click on your application. The application page displays.
5. Navigate to **Properties**.
6. Click the **copy icon** next to the **Application ID**. The ID is copied to your clipboard to use as needed.

Properties

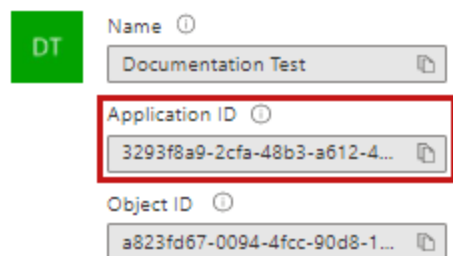

10.3 Removing application access

Removing access to an application can be done outside of Relativity in Microsoft Entra ID. To remove access, follow the steps below in the [Azure Portal](#):

1. Click **Microsoft Entra ID** (formerly known as Azure Active Directory).
2. In the navigation menu, click **Enterprise applications**.

3. In the list of applications, locate and open the desired application.
4. In the application, click **Delete**.

Proprietary Rights

This documentation (“**Documentation**”) and the software to which it relates (“**Software**”) belongs to Relativity ODA LLC and/or Relativity’s third party software vendors. Relativity grants written license agreements which contain restrictions. All parties accessing the Documentation or Software must: respect proprietary rights of Relativity and third parties; comply with your organization’s license agreement, including but not limited to license restrictions on use, copying, modifications, reverse engineering, and derivative products; and refrain from any misuse or misappropriation of this Documentation or Software in whole or in part. The Software and Documentation is protected by the **Copyright Act of 1976**, as amended, and the Software code is protected by the **Illinois Trade Secrets Act**. Violations can involve substantial civil liabilities, exemplary damages, and criminal penalties, including fines and possible imprisonment.

©2026. Relativity ODA LLC. All rights reserved. Relativity® is a registered trademark of Relativity ODA LLC.